



Non-destructive quantification of water gradient in sludge composting with Magnetic Resonance Imaging

F.P. Duval, S. Quellec, A. Trémier, C. Druilhe, François Mariette

► To cite this version:

F.P. Duval, S. Quellec, A. Trémier, C. Druilhe, François Mariette. Non-destructive quantification of water gradient in sludge composting with Magnetic Resonance Imaging. *Waste Management*, 2010, 30 (4), pp.610-619. 10.1016/j.wasman.2009.09.045 . hal-02593165

HAL Id: hal-02593165

<https://hal.inrae.fr/hal-02593165>

Submitted on 15 May 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Non-Destructive Quantification of Water Gradient in Sludge Composting with Magnetic Resonance Imaging

F.P. Duval^{1,3}, S. Quéllec^{1,3}, A. Trémier^{2,3}, C. Druilhe^{2,3}, F. Mariette^{1,3,*}

1-Cemagref, UR TERE, 17 Avenue de Cucillé, CS 64427, F-35044 Rennes, France.

2-Cemagref, UR GERE, F-35044 Rennes, France.

3-Université européenne de Bretagne, France.

* Corresponding author. Tel.: +33 2 23 48 21 21; Fax: +33 2 23 48 21 15; E-mail address:
francois.mariette@cemagref.fr

Abstract

Sludge from a slaughterhouse wastewater plant, and mixtures of bulking agent (crushed wood pallet) and sludge were studied by Nuclear Magnetic Resonance (NMR). The NMR spin-spin relaxation (T_2) and spin-lattice relaxation (T_1) signals for sludge, wet crushed wood pallet and mixtures of sludge and bulking agent were decomposed into three relaxation time components. Each relaxation time component was explained by a non-homogeneous water distribution on a microscopic length scale and by the porosity of the material. For all samples, the T_2 relaxation time value of each component was directly related to the dry matter content. The addition of wet crushed wood to sludge induced a decrease in the relaxation time, explained by water transfer between the sludge and the wood. Magnetic Resonance Imaging (MRI) and respirometric measurements were performed on sludge and wood mixtures. MR images of the mixtures were successfully obtained at different biodegradation states. Based on specific NMR measurements in an identified area located in the MRI cells, the results showed that grey levels of MR images reflected dry matter content. This preliminary study showed that MRI would be a powerful tool to measure water distribution in sludge and bulking agent mixtures and highlights the potential of this technique to increase the understanding of sludge composting.

Keywords: NMR, MRI, relaxation, compost, biodegradability, moisture content, bulking agent, sludge

1. Introduction

Treatment of wastewater is an important issue in western countries and research is currently being undertaken to investigate the elimination or re-use of residual sludge at better cost, including composting of wastewater sludge. In order to do so, sludge needs to be mixed with a bulking agent which creates a porous matrix. Proportions of sludge and bulking agent are chosen so that sludge covers the bulking agent with a thin layer, and then micro-organisms in the sludge are sufficiently aerated to consume the available biodegradable organic matter. During sludge composting treatment, the active biodegradation takes place in three to four weeks, followed by several months of maturation (Gupta, 2008). Selection of an initial waste recipe with optimal physical and biochemical parameters is essential to create an environment conducive to high microbial growth and activity, and then to shorten and improve the biodegradation in the active phase (Haug, 1993; Agnew, 2003). Some of the important physical parameters for this waste recipe are water content, air porosity and specific surface area.

Research on composting is often focused on overall understanding of the biodegradation phenomena, i.e. on a macro-scale. All the parameters of biodegradation such as oxygen consumption, bacteria activity, porosity and moisture content are averaged, and little is known regarding the influence of local behaviour of the physical parameters on overall biodegradation. Since solid wastes are very heterogeneous, better understanding of water content, porosity and specific surface spatial distribution is needed, and Magnetic Resonance Imaging (MRI) could help to fill this gap. Indeed, most of the common techniques to measure physical parameters can not be applied along the composting process because they are invasive or destructive. Moisture measurements need sampling and drying. Classic porosity measurement implies to fill the porous volume with a liquid (Annan, 1998), which is destructive for the sample. Pycnometry is a non destructive method but results directly depend

on the applied pressure leading to the measurement of total air space (TAS) or only free air space (FAS) (Su, 2006). Measurement of the specific surface is not easier. The direct measurement technique through gaseous absorption (BET) used by Palmowski et al. (Palmowski, 2003) can only be applied after drying the waste. On the contrary, MRI is non-destructive and non-invasive and thus makes it possible to follow the evolution of samples over time. MRI is well known for its medical applications, but it has been used in other fields including the wood industry (Muller, 2002), study of bacterial chemotaxis (Sherwood, 2003; Olson, 2004), chemical engineering (Mantle, 2003), civil engineering (Faure, 2005), fluid mechanics (Bonn, 2008), pharmaceutical science (Richardson, 2005) and food science (Hills, 1998; Butz, 2005). In an MRI experiment, the volume in which the signal is collected is called a voxel, and its typical order of magnitude is the cubic millimetre. Voxel intensity is a function of local proton density and of their respective spin-lattice (T_1) and spin-spin (T_2) relaxation times. Proton density is proportional to the amount of material containing protons. In most materials, water is the main constituent related to proton density. Consequently, the grey level intensity of a voxel may be related to water content or air content (*i.e.* porosity). Indeed when the voxel size is larger than the pore size the porosity is directly related to the intensity of the MRI signal: the greater the quantity of gas, the lower the signal. This method has been used in food science to quantify the distribution of porosity during proving of dough (Grenier, 2003; Lucas, 2005). In the extreme case where the pore volume is much larger than the voxel size, the pore size can be measured. For example, air cavities have been detected and quantified in food products such as cheese (Mariette, 2004; 2006). In addition to the porous fraction, the specific surface area can be estimated if the resolution of the MR images is good enough.

Spin-lattice (T_1) and spin-spin (T_2) relaxation times are related to water content and also to material microstructure and to molecular structure (Brownstein, 1979; Belton, 1987; Hills,

1989b; a; Denisov, 2002). Several authors have used the T_2 and T_1 relaxation times as tracers of water content for the investigation of draining processes (Mariette, 2006) and rehydration processes (Ziegler, 2003).

The aim of this study was to evaluate the potential of the MRI technique in sludge composting to quantify the water distribution. . The first part of this report focuses on the description of the nuclear magnetic resonance (NMR) signals in sludge and in mixtures of sludge and bulking agent and their sensitivity to water content. The second part describes the preliminary results of MRI images from sludge and bulking agent mixture. The potential for determination of water content and measurement of local porosity by MRI is discussed.

2. Materials and Methods

2.1 Sludge and bulking agent

The sludge came from the biological activated sludge treatment of the wastewater from a slaughter-house. Iron chloride and a polymeric flocculent (PRAESTOL K133) were added to the sludge to induce flocculation and, after a decantation step, the sludge was dewatered using a press band. The collected sludge was stored frozen at -20°C in 1kg batches. Sludge was unfrozen before each experiment, initially in a refrigerator at 4°C and then at room temperature.

The dry matter (DM, measured by drying at 105°C until constant weight) in the sludge was 13.6% of total weight, with approximately 80% organic matter to DM. The exact quantity of living bacteria present in the sludge was unknown. Flocs of bacteria were observed using optical microscopy (data not shown). Sludges with higher dry matter content were prepared using a low pressure oven (34 Mb and 30°C). Mixtures of sludge and bulking agent were prepared by hand mixing the sludge with crushed wood pallet as bulking agent. The size of the wood chips considered was 8 to 12 mm. Wood was stored after drying at 80°C . Different

samples were then studied by NMR, i.e. the sludge without bulking agent, mixtures of wood and sludge, and a rehydrated wood sample (DM 45%). Since there is water transfer between sludge and dried wood after mixing, the saturated wood sample was prepared to mimic the contribution of the re-hydrated wood fraction in the mixture.

A combined experiment using MRI and respirometry was set up. Two large respirometric cells were prepared with 4.5 kg of sludge (wet) mixed with 2.5 kg of wood (dry mass ratio 1/4.1 g_{DM}/g_{DM}). The moisture content in both cells was approximately 56%. MRI measurements were performed at day 1, day 3 and day 27 of biodegradation. Samples were taken from these cells for NMR measurement and moisture analysis at 27 days.

2.2 Respirometry

Respirometry is a useful tool to assess microbial activity (Iannotti, 1994; Adani, 2001; Gea, 2004). The respirometric apparatus used in this study consisted of a 10 L airtight cylindrical reactor made of glass. Three to four kilos of precisely weighed material were introduced into the respirometric reactor on a 3 mm round mesh grid placed 70 mm above the cell bottom. An entering air flow rate of 65 L/h (compressed air) was applied throughout the experiments. Homogeneity of aeration of the entire sample was provided by means of the rapid recirculation of the exhaust gas in the cell (360 L/h). The entering and exhaust air streams were monitored for O₂ content using a paramagnetic O₂ gas analyser (MAHAIK Technology, Germany).

The apparatus was monitored for **the main** environmental factors influencing microbial activity, **i.e. temperature and moisture**. As shown on **Figure 1** the temperature of samples was held constant by placing each respirometric cell in a water-bath at 40°C, which is optimal for biodegradation activity (Tremier, 2005). The inlet air was preheated to 40°C using a copper tubular coil with a diameter of 10 mm, thickness of 2 mm and length of 2 m, submerged in the

water-bath. The sample temperatures were monitored by means of a Pt100 temperature probe (OMNI Instrument, UK) inserted in the centre of the sample. For the moisture control, the inflowing air was saturated by bubbling through two water-filled glass bottles immersed in the water-bath. Moisture condensing in the exhaust air was collected in beakers above the water-bath to prevent its return into the sample cell and its entrance into the gas analyser.

2.3 NMR measurements

All NMR measurements were performed with a 10 MHz Minispec Mq10 (Bruker, Wissembourg, France). Typical 90° and 180° pulse durations were 14 μs and 32 μs , respectively, with an 8 dB pulse attenuation. The temperature was fixed at 20°C . Spin-Spin relaxation time (T_2) measurements were performed using a Carr Purcell Meiboom and Gill (CPMG) sequence (Meiboom, 1958). Three thousand consecutive echoes were recorded with a time spacing of 0.1 ms between the 90° and the first 180° pulse. Recycle delay and number of scans were 2 s and 8 s, respectively. Spin-Lattice relaxation time (T_1) measurements were performed using a saturation recovery (SR) sequence. Times between the two 90° pulses were varied one hundred times from 5 ms to 2000 ms. The NMR signal was acquired 28 μs after the second 90° pulse in order to detect only the longest relaxation components, *i.e.*, the water proton relaxation. Recycle delay and number of scans were 2 s and 8 s, respectively.

2.5 Calculation of NMR parameters

Relaxation curves were fitted using two different methods, the Maximum Entropy Method (MEM) (Mariette, 1996), which provides a continuous distribution of relaxation components, and the Levenberg-Marquardt algorithm, which allows discrete solution for the fitting (Table

Curve, Jandel) (Marquardt, 1963). Moreover, no assumptions regarding the number of relaxation times are necessary with MEM compared to the Levenberg-Marquardt algorithm method.

For the spin-spin relaxation decay signal, the equation used for fitting according to the Levenberg-Marquardt method was:

$$S(t)_{CPMG} = I_1 e^{-\frac{t}{T_{21}}} + I_2 e^{-\frac{t}{T_{22}}} + I_3 e^{-\frac{t}{T_{23}}} + c \quad \text{Eq.1}$$

where $S(t)_{CPMG}$ is the intensity of the total relaxation signal (a.u.), t is the time of the relaxation process (ms), T_{2i} the spin-spin relaxation time of the component i (ms) and I_i the associated signal (a.u.). A constant c was added into the model in order to take into account change in the decay baseline.

Spin-Lattice relaxation curves were fitted with the Levenberg-Marquardt algorithm with the following equation:

$$S(t)_{SR} = I_1 (1 - \alpha e^{-\frac{t}{T_{11}}}) + I_2 (1 - \alpha e^{-\frac{t}{T_{12}}}) + I_3 (1 - \alpha e^{-\frac{t}{T_{13}}}) \quad \text{Eq.2}$$

where $S(t)_{SR}$ is the intensity of the total relaxation signal (a.u.), t is the time of the relaxation process (ms), T_{1i} the spin-lattice relaxation time of the component i (ms) and I_i the associated signal (a.u.). A constant α was introduced to correct for imperfections in the 90° pulse.

183

2.6 MRI measurements

A 1.5 Tesla whole body MRI scanner (Magnetom Avento Siemens, Erlangen, Germany) was used. The MR images were acquired with the standard spin echo sequence. Forty-five slices of 2 mm were recorded, the distance between the centres of two consecutive slices being 4 mm. The field of view was 220 mm x 220 mm for 256 x 256 pixel sampling. Echo time (T_E), repetition time (T_R) and pixel bandwidth were 8 ms, 1000 ms and 395 Hz/pixel, respectively.

The grey level intensity S_{ES} (a.u) within a voxel with a standard spin-echo sequence was given by the equation:

$$S_{ES} = I \left(1 - \beta e^{-\frac{T_R}{T_1}} \right) \times e^{-\frac{T_E}{T_2}} \quad \text{Eq.3}$$

with I the intensity related to the relaxation times T_1 and T_2 of the protons in the voxel. β is a parameter introduced to correct for imperfections in the 90° pulse. This equation assumed a single proton component with a single spin-spin relaxation and a single spin-lattice relaxation. In the case of multi-exponential behaviour, the grey level intensity would be a combination of the different relaxing components for both T_1 and T_2 .

3. Results and discussion

3.1 NMR

Figure 2 shows typical CPMG (a) and SR (b) signals for two wood and sludge mixtures with dry matter of 24% and 70%. CPMG signal intensities decreased throughout the acquisition time t , according to equation 1. An increase in signal intensity was obtained for SR as expected from equation 2. The effects of water content on NMR parameters can be described from the two CPMG signals. Firstly, since the initial signal intensity was proportional to the sample proton content, and because water is one of the most abundant protonic molecules in our system, this explains the reduction in signal intensity from 3.7 to 2.2 a.u. observed between the two samples. Secondly, the water relaxation time is highly sensitive to water content. Indeed, T_2 relaxation was directly related to molecular mobility, i.e., the slower the molecular mobility the shorter the relaxation time (Belton, 1990). The relaxation time of a small molecule is thus always higher than the relaxation time of a large molecule. Moreover, the exchange between water protons and exchangeable protons from the molecule contained in the dry matter has to be taken into account for water. This exchange, known as chemical

214 exchange, is one of the most efficient mechanisms of water relaxation (Belton, 1987; Hills,
215 1989b; a; Belton, 1990; Denisov, 2002). Consequently, water relaxation is always sensitive to
216 water content and its value decreases with water content, explaining the more rapid decrease
217 in the CPMG signal observed for the driest sample. The same mechanisms are also involved
218 in the T_1 relaxation from the Saturation Recovery NMR sequence. The intensity measured at
219 2 s was lower for the driest sample and the recovery of the signal (shorter T_1) was faster for
220 the driest sample.

221 The spin-spin relaxation distributions (T_2) from MEM obtained from fitting the CPMG curve
222 are presented in Figure 3. For all samples, two or three peaks were extracted from the signal
223 according to the sample dry matter. Two mechanisms can be proposed to explain such multi-
224 exponential relaxation behaviour. The first is based on the assumption of the chemical
225 composition of the sample. For example, in the case of the water and fat mixture in an
226 emulsion, a specific exponential can be attributed to each phase, *i.e.* water and fat (Duval,
227 2006). However, since our samples were mainly composed of water, this hypothesis did not
228 hold. The second mechanism is based on the sample microstructure which may induce non-
229 homogeneous water distribution on a microscopic length scale. Indeed, when water exchange
230 by diffusion between different compartments is slow compared to the relaxation time value,
231 the averaging effect is not sufficient to yield a single relaxation time value, and several peaks
232 are observed for the water relaxation. This multi-exponential relaxation for water has already
233 been reported for many samples which exhibited restriction to the water diffusion. For
234 example three peaks have been reported from the relaxation decay curve of vegetable tissues.
235 These peaks were attributed to water in the vacuole, in the cytoplasm and in the cell wall,
236 respectively (Snaar, 1992; Van Dusschoten, 1995; Duval, 2005; Musse, 2009). This
237 mechanism therefore seems the most relevant to explain the multi-exponential behaviour of
238 the relaxation.

For the sludge, depending on the dry matter, two or three peaks were extracted from the signal (Figure 3-a). Their T_2 values covered a range from 5 to 60 ms. The sludge was composed of flocculated bacteria which induced heterogeneity in the water distribution. Indeed, water was always present in bacteria, in and around the flocs. Since water protons are thus in three different compartments, it is tempting to associate each relaxation time with a water compartment. Granular sludges have already been studied by NMR (Lens, 1997; Lens, 1999), and a relaxing agent was used to lower the proton relaxation times in the solution. Relaxation times of 10-15 ms and 30 ms were attributed to methanogenic (Lens, 1999) and sulfidogenic bacteria (Lens, 1997), respectively. Water in the granular matrix had a relaxation time of 40-100 ms (Lens, 1999). According to these results, the first peak could be related to the bacteria and the second to the water around the bacteria (Figure 3-a). However, a water proton from the solution could well contribute to the first or the second peak. Since no peak was found with a value close to the free water value (1.5-3 s), this means that there were some molecules in the sludge solution that lowered the overall relaxation of the proton of this compartment. The polymer added for the flocculation could explain the decrease in the water relaxation time, but the effect of the iron chloride (used to dehydrate the sludge) has also to be taken into account.

Wood relaxation is well documented in the literature (Hsi, 1977; Menon, 1987; Araujo, 1992; Araujo, 1994; Hartley, 1994; Xu, 1996). Three main relaxation times were found related to water in cell wall fibrils (fast T_2), water in the ray and late wood tracheid lumens (medium T_2) and water in early wood tracheid lumens (fast T_2). Above the fiber saturation point (FSP), wood relaxation times are relatively constant over a wide range of water content (Menon, 1987). Below FSB, the relaxation times are a function of water content. The wood used in this study had a similar relaxation time distribution (Figure 3-b) as that reported for Western Red Cedar sapwood (Menon, 1987). At a water content of 55%, the mean relaxation times were 10

ms, 35 ms and 115 ms. The last two peaks were broad. Wood relaxation is sensitive to cell size and wood species. Since the wood used in this study was heterogeneous in origin, this would explain the peak shapes.

In a wood and sludge mixture there was water equilibrium between the two. After mixing, the sludge tended to loose water and the wood tended to gain water. Three typical relaxation distributions of wood and sludge mixtures are presented in Figure 3-c. The dry matter mixtures were 24%, 50% and 71%, respectively. Two or three peaks could be seen, the first being narrow (in the range of 0-10 ms), and the second peak broad, the range becoming larger with the increase in water content. Eventually, two broad peaks could be seen for the wettest samples. For the driest samples, the wood FSP was most probably not reached since no relaxation times were found above 40 ms. When the samples became wetter, the wood water content must have been above the FSP. Water filled the wood cells and then the relaxation time distribution could become broader. One important result in this study was that most of the T_2 relaxation distributions for wood and sludge were in the same range. Thus it was not possible to distinguish specific NMR signals from the sludge and the wood in the wood-sludge relaxation distribution.

Using the Levenberg-Marquardt algorithm to fit the T_2 relaxation decay curves, the smallest residues were obtained with a three component fitting equation (equation 1). The three T_2 values were consistent with the T_2 distribution discussed above. Relaxation rates ($R_2 = 1/T_2$) for the three components are plotted on Figure 4 for sludge samples (a) and for sludge and wood mixtures (b). For all samples, a constant decrease was observed with the increase in water mass over dry matter mass. Moreover, the variation in relaxation rate was the same for the three components. This demonstrates that all fractions were in equilibrium and were affected by the dehydration process in the same way, despite the micro heterogeneity in the

water distribution in the sample. It should be noted that the same variation was observed for sludge dehydrated by air drying and by exchange with dry wood. These results confirm that the main effect on the water relaxation rate in the two samples was the dry matter content. Spin-lattice relaxation times (T_1) were measured for wood and sludge mixtures. As for the spin-spin relaxation curves, the spin-lattice relaxation curves were fitted with MEM and the Levenberg-Marquardt algorithm (equation 2). The MEM distributions were composed of two or three peaks (Figure 5-a), the first peak being narrow (range 5-20 ms), the other peaks being broad (ranging from 15 ms to 250 ms). The Levenberg-Marquardt algorithm had the smallest residues for the three components. The difference between the two fitting methods obtained for some mixtures (two components from MEM and three from the discrete method) is explained by the wide distribution of the second peak. Indeed, this effect is known to induce discrepancies between the fitting methods (Mariette, 1996). The second peak obtained by MEM was decomposed into two discrete T_1 values with the discrete method. As for R_2 , a linear relationship in a log-log plot was observed between the spin-lattice relaxation rate R_1 and the water mass over dry matter mass (Figure 5-b). Moreover, this relationship was obtained for the three components. Only the T_2 sensitivity to water content will be considered for the following MRI measurement.

3.2 MRI

Two experimental cells were scanned with the whole body MRI scanner at different periods of biodegradation. In the mean time, the cells were monitored for biodegradation through respirometry measurements (Figure 6). Indeed, oxygen consumption is a good indicator of sludge biodegradation. The respirometric profiles obtained, that were similar for the two cells, are typical. The oxygen uptake rate increased quickly due to biodegradation of the most easily biodegradable substrate. Then, when all this matter had been degraded, a break in the

314 exponential growth was observed. The oxygen consumption rate then decreased until all the
315 biodegradable substrates had completely disappeared. During this decrease, the slowly
316 biodegradable organic matter was hydrolysed before being consumed by micro-organisms.
317 After 27 days, consumption rate returned to ground state and respirometric study could then
318 be stopped (Tremier, 2005; Berthe, 2007).

319 Both respirometric cells were thus scanned at D0 before biodegradation, then cell 1 at D3
320 after the biodegradation peak, and finally cell 2 at D27 when biodegradation was low and
321 constant. Examples of MR images at D0, D3 and D27 are presented in Figure 7. Images (a)
322 and (b) and images (c) and (d) were taken at the same location in cell 1 and in cell 2,
323 respectively. At D0, cell 1 (Figure 7-a) and cell 2 (Figure 7-c) images were similar: no
324 differences between the MR images for the two cells could be seen. The wet pieces of wood
325 covered with sludge were clearly visible. The black areas were the air space between the
326 bulking agents. The contrast in the image will allow to implement image segmentation
327 method to compute the inter porosity and the specific surface area. For larger pieces of wood,
328 the edges of the wood tended to be more intense than the centres, showing that the water had
329 not yet fully hydrated the centres of the wood. NMR relaxation experiments showed that this
330 process required at least 10h (data not shown). After 3 days, the edge effect was less visible
331 for cell 1 and the wood chips were even better defined (Figure 7-b). MR images of cell 2
332 taken after 27 days were highly contrasted. The MR image (Figure 7-d) showed two distinct
333 areas. Very low signal intensity was detected at the bottom of the image, compared with a
334 high level signal intensity at the top. This was due to the fact that cell 2 became highly
335 heterogeneous in water content in 27 days. The low intensity area had dry matter content of
336 around 60-70%. The intensity of the mixture signal was too low to be fully detected with
337 MRI. The other area had a dry matter content of around 25%, which demonstrated water
338 transfer in the cell. At D3, the water content in cell 1 also began to be inhomogeneous, but to

a lesser extent. The average dry matter content was 44%, two percent less than at D0. The contrast between D3 and D27 was thus due to the difference in dry matter content.

MRI images were obtained with a spin echo sequence, the grey level intensities being a function of both relaxation times (T_1 , T_2) and the amount of water (see eq.3). Since the repetition time, T_R , was 1 s and the largest spin-lattice relaxation time (T_1) found for the

wettest wood and sludge mixture was 250 ms, then in equation 3, $\left(1 - \beta e^{-\frac{T_R}{T_1}}\right) \sim 1$. Thus, the

MR images were not T_1 weighted. Equation 3 can be rewritten for the three components as:

$$S_{ES} = I_1 e^{-\frac{T_E}{T_{21}}} + I_2 e^{-\frac{T_E}{T_{22}}} + I_3 e^{-\frac{T_E}{T_{23}}} \quad \text{Eq.4}$$

Since the intensity of each component I_i and the three T_2 relaxation times were strongly dependent on the water content of the sample, the global signal intensity should consequently also be directly related to water content in the mixture. This direct relationship was checked by taking samples from cell 1 at D3 and from cell 2 at D27 at different heights in the cells where MR images showed inhomogeneity. NMR and moisture content measurements were performed on these samples. Signal intensities at 8 ms were extracted from the NMR CPMG experiments and plotted against dry matter (Figure 8). As expected, the intensities decreased with dry matter content. Despite the biological activity during the 27 days of storage, no biodegradation effect was observed. The results provide evidence that the effect of biological activity on the NMR signal of wood and sludge mixtures is negligible with regard to dry matter content. The decay was non-linear. Indeed, with an 8 ms echo time, the multi-exponential behaviour introduced a weighting from the different components. We demonstrated that the grey levels of the MRI images were directly related to dry matter content when the water content was above 40-30%. Below this value the signal was too low to be detected with this MRI protocol.

MRI has been used previously to monitor wood decay by fungus (Muller, 2002): indeed biological activity means a local increase in water content, which leads to a local change in relaxation times and intensities. In this experiment, respirometry showed that biodegradation occurred and both the NMR measurements and the MR images showed changes in the dry matter content. MR images gave 3D representation of the heterogeneity of dry matter content in the cells after 27 days of biodegradation (Figure 9). Heterogeneity was both vertical and horizontal. Biodegradation may contribute to the heterogeneity of the dry matter, but the main cause seems to be related to the cell design. The dried area is above the tube where air flows into the cell. The air rate must be too fast and then has a drying effect. The humid area is located under the tube where air flows out of the cell (Figure 2). Even with the water trap, some water seems to condense in this tube and then drops to the wood and sludge mixture. Thus, these MR images cannot be taken as proof of biodegradation activity. Nevertheless, they will be used to improve the design of the respiratory cell.

4. Conclusion

We have shown that the NMR water relaxation for wood and sludge exhibited a multi-exponential relaxation time behaviour which can be explained by the microstructure of the matrix. Moreover, a high dry matter content effect on the relaxation was observed for sludge samples and for sludge and wood mixtures. This effect was the same whatever the relaxation time component, which confirmed that the dry matter content had the main effect on the NMR parameters. Wood and sludge mixtures were scanned successfully by MRI using a spin echo sequence. The grey level intensities were correlated with the dry matter content, thus demonstrating the feasibility of MRI to quantify the water distribution in respiratory cells. Moreover, image resolution was good enough for image analysis. Since voxel size was much smaller than pore volume, porosity and specific surface area should be available.

388 **Acknowledgments**

389 The authors thank Mylene Launay and Mireille Cambert for their technical assistance.

390

391 **Figure legends**

392 Figure 1 : Diagram of respirometric apparatus

393

394 Figure 2 : Typical CPMG (a) and SR (b) decay curves for two ratios of sludge and wood with
395 70 % (■) and 24 % (◆) dry matter.

396

397 Figure 3 : Spin-spin relaxation time (T_2) distributions. Adjustments were made with the MEM
398 routine. (a) Sludge samples with 15%, 25% and 52% dry matter content (b) Wet wood with
399 dry mater of 45% (c) Mixtures of sludge and wood with 24.2%, 50.2% and 70.8% dry matter
400 content. One used the CPMG sequence (3000 echoes, with $\tau = 0.1$ ms, RD = 2 s, NS = 8).

401

402 Figure 4 : Three component spin-spin relaxation rates ($1/T_2=R_2$) for (a) sludge samples and
403 (b) sludge and wood mixtures at various water over DM mass ratios. First component (◆),
404 second component (■) and third component (▲). One used the CPMG sequence (3000
405 echoes, with $\tau = 0.1$ ms, RD = 2 s, NS = 8). Dashed lines $\propto(m_W/m_{DM})^{-1}$ are to assist reading.

406

407 Figure 5 : Spin-lattice relaxation time (T_1) distributions for mixtures of sludge and wood with
408 24.2% and 70.1% dry matter content (a). Adjustments were made with the MEM routine.
409 Three component spin-lattice relaxation rates (R_1) for sludge and wood mixtures at various
410 water over DM mass ratios (b). First component (◆), second component (■) and third
411 component (▲). One used the SR sequence (100 points with $\tau_1=5$ ms, $\tau_{100}= 2000$ ms, RD = 2
412 s, NS = 8). Dashed lines $\propto(m_W/m_{DM})^{-1}$ to assist reading.

413

414 Figure 6 : Oxygen uptake rate over time for the two respirometric cells used in the combined
415 MRI-Respirometry set up.

416

417 Figure 7 : MRI images of respirometric cells 1 and 2 taken with a spin echo sequence ($T_E = 8$
418 ms, $T_R = 1000$ ms, FOV = 220 mm x 220 mm, thickness 2mm, sampling 256x256): Cell 1 at
419 D0 (a) and D3 (b), Cell 2 at D0 (c) and D27 (d).MR images were representative of the area 3
420 cm below the centre of the airtight cylindrical reactor.

421

422 Figure 8 : Spin-spin relaxation intensities normalised by sample mass extracted from CPMG
423 decay curves at 8 ms compared to dry matter content of sludge and wood mixtures. Samples
424 were taken from the leftover mixture at D0 and at D3 and D27 from the respirometric cell 1
425 and cell 2, respectively. One used the CPMG sequence (3000 echoes, with $\tau=0.1$ ms,
426 RD=2s, NS=8).

427

428 Figure 9 : MRI images of respirometric cell 2 at D27, taken with a spin echo sequence ($T_E =$
429 8 ms, $T_R = 1000$ ms, FOV = 220 mm x 220 mm, thickness 2mm, sampling 256x256).
430 Selected images were separated by 3.6 cm. They are labelled from the bottom (slice 1) to the
431 top (slice 45) of the cell.

432

433

434 References

435

- 436 Adani, F., Lozzi, P., Genevini, P., 2001. Determination of biological stability by oxygen
437 uptake on municipal solid waste and derived products. *Compost Science & Utilization*
438 9, 163-178.
- 439 Agnew, J.M., Leonard, J.J., 2003. The physical properties of compost. *Compost Science &*
440 *Utilization* 11, 238-264.
- 441 Annan, J.S., White, R.K. 1998 Evaluation of techniques for measuring air filled porosity in
442 composts of municipal biosolids and wood chips. *In* Conference of composting in the
443 southeast, September 9-11, Athens, Georgia, USA.
- 444 Araujo, C.D., Avramidis, S., Mackay, A.L., 1994. Behaviour of Solid Wood and Bound
445 Water as a Function of Moisture Content a Proton Magnetic Resonance Study.
446 *Holzforschung* 48, 69-74.
- 447 Araujo, C.D., Mackay, A.L., Hailey, J.R.T., Whittall, K.P., Le, H., 1992. Proton Magnetic-
448 Resonance Techniques for Characterization of Water in Wood - Application to White
449 Spruce. *Wood Science and Technology* 26, 101-113.
- 450 Belton, P.S. 1990 Can Nuclear Magnetic Resonance Give Useful Information About the State
451 of Water in Foodstuffs? *Comments on Agricultural and Food Chemistry Science*
452 2,179-209..
- 453 Belton, P.S., Hills, B.P., 1987. The effects of diffusive exchange in heterogeneous systems on
454 N.M.R line shapes and relaxation processes. *Molecular Physics* 61, 999-1018.
- 455 Berthe, L., Druilhe, C., Massiani, C., Tremier, A., de Guardia, A., 2007. Coupling a
456 respirometer and a pycnometer, to study the biodegradability of solid organic wastes
457 during composting. *Biosystems Engineering* 97, 75-88.
- 458 Bonn, D., Rodts, S., Groenink, M., Rafai, S., Shahidzadeh-Bonn, N., Coussot, P., 2008. Some
459 applications of magnetic resonance imaging in fluid mechanics: Complex flows and
460 complex fluids. *Annual Review of Fluid Mechanics* 40, 209-233.
- 461 Brownstein, K.R., Tarr, C.E., 1979. Importance of classical diffusion in NMR studies of water
462 in biological cells. *Physical Review A* 19, 2446-2453.
- 463 Butz, P., Hofmann, C., Tauscher, B., 2005. Recent developments in noninvasive techniques
464 for fresh fruit and vegetable internal quality analysis. *Journal of Food Science* 70,
465 R131-R141.
- 466 Denisov, V.P., Halle, B., 2002. Hydrogen exchange rates in proteins from water H-1
467 transverse magnetic relaxation. *Journal of the American Chemical Society* 124,
468 10264-10265.
- 469 Duval, F., Cambert, M., Mariette, F., 2005. NMR study of tomato pericarp tissue by spin-spin
470 relaxation and water self-diffusion. *Applied Magnetic Resonance* 28, 29-40.
- 471 Duval, F.P., Van Duynhoven, J.P.M., Bot, A., 2006. Practical implications of the phase-
472 compositional assessment of lipid-based food products by time-domain NMR. *Journal*
473 *of the American Oil Chemists' Society* 83, 905-912.
- 474 Faure, P., Care, S., Po, C., Rodts, S., 2005. An MRI-SPI and NMR relaxation study of drying-
475 hydration coupling effect on microstructure of cement-based materials at early age.
476 *Magnetic Resonance Imaging* 23, 311-314.
- 477 Gea, T., Barrena, R., Artola, A., Sanchez, A., 2004. Monitoring the biological activity of the
478 composting process: Oxygen uptake rate (OUR), respirometric index (RI), and
479 respiratory quotient (RQ). *Biotechnology and Bioengineering* 88, 520-527.

- Grenier, A., Lucas, T., Collewet, G., Le Bail, A., 2003. Assessment by MRI of local porosity in dough during proving. Theoretical considerations and experimental validation using a spin-echo sequence. *Magnetic Resonance Imaging* 21, 1071-1086.
- Gupta, R., Garg, V.K., 2008. Stabilization of primary sewage sludge during vermicomposting. *Journal of Hazardous Materials* 153, 1023-1030.
- Hartley, I.D., Kamke, F.A., Peemoeller, H., 1994. Absolute Moisture Content Determination of Aspen Wood Below the Fiber Saturation Point Using Pulsed NMR. *Holzforschung* 48, 474-479.
- Haug, R.T., 1993. *The practical handbook of composting engineering*. Lewis Publishers, Boca Raton, Florida, USA.
- Hills, B., 1998. *Magnetic resonance imaging in food science*. A Wiley Interscience publication, New York. USA.
- Hills, B.P., Takacs, S.F., Belton, P.S., 1989a. The effects of proteins on the proton NMR transverse relaxation time of water. II protein aggregation. *Molecular Physics* 67, 919-937.
- Hills, B.P., Takacs, S.F., Belton, P.S., 1989b. The effects of proteins on the proton NMR transverse relaxation times of water. I Native bovine serum albumine. *Molecular Physics* 67, 903-918.
- Hsi, E., Hossfeld, R., Bryant, R.G., 1977. Nuclear magnetic resonance relaxation study of water absorbed on milled northern white-cedar. *Journal of Colloid and Interface Science* 62, 389-395.
- Iannotti, D.A., Grebus, M.E., Toth, B.L., Madden, L.V., Hoitink, H.A.J., 1994. Oxygen Respirometry to Assess Stability and Maturity of Composted Municipal Solid-Waste. *Journal of Environmental Quality* 23, 1177-1183.
- Lens, P., Pol, L.H., Lettinga, G., Van As, H., 1997. Use of H^1 NMR to study transport processes in sulfidogenic granular sludge. *Water Science and Technology* 36, 157-163.
- Lens, P., Vergeldt, F., Lettinga, G., Van As, H., 1999. H^1 NMR characterisation of the diffusional properties of methanogenic granular sludge. *Water Science and Technology* 39, 187-194.
- Lucas, T., Grenier, A., Quellec, S., Le Bail, A., Davenel, A., 2005. MRI quantification of ice gradients in dough during freezing or thawing processes. *Journal of Food Engineering* 17, 98-108.
- Mantle, M.D., Sederman, A.J., 2003. Dynamic MRI in chemical process and reaction engineering. *Progress in Nuclear Magnetic Resonance Spectroscopy* 43, 3-60.
- Mariette, F., 2004. NMR relaxometry and MRI techniques: a powerful association in food science. *Comptes Rendus Chimie* 7, 221-232.
- Mariette, F. 2006 NMR imaging of dairy products. *Modern Magnetic Resonance, Part 3: Applications in Materials Science and Food Science*, Springer; London, UK
- Mariette, F., Guillement, J.P., Tellier, C., Marchal, P. 1996 Continuous relaxation time distribution decomposition by MEM. *In Signal Treatment and Signal Analysis in NMR*, Elsevier, Paris, France.
- Marquardt, D.W., 1963. An algorithm for least squares estimations of nonlinear parameters. *Journal of the Society for Industrial and Applied Mathematics* 11, 431.
- Meiboom, S.G.D., 1958. Compensation for pulse imperfections in Carr-Purcell NMR experiments. *Review of Scientific Instruments* 29, 688.
- Menon, R.S., Mackay, A.L., Hailey, J.R.T., Bloom, M., Burgess, A.E., Swanson, J.S., 1987. An NMR Determination of the physiological water distribution in wood during drying. *Journal of Applied Polymer Science* 33, 1141-1155.

- Muller, U., Bammer, R., Teischinger, A., 2002. Detection of incipient fungal attack in wood using magnetic resonance parameter mapping. *Holzforschung* 56, 529-534.
- Musse, M., Quéllec, C., Devaux, M.F., Cambert, M., Lahaye, M., Mariette, F., 2009. An investigation of the structural aspects of the tomato fruit by means of quantitative nuclear resonance imaging. *Magnetic Resonance Imaging* 27, 709-719.
- Olson, M.S., Ford, R.M., Smith, J.A., Fernandez, E.J., 2004. Quantification of bacterial chemotaxis in porous media using magnetic resonance imaging. *Environmental Science & Technology* 38, 3864-3870.
- Palmowski, L., Müller, J., 2003. Anaerobic degradation of organic materials-significance of the substrate surface area. *Water Science and Technology* 47, 231-238.
- Richardson, J.C., Bowtell, R.W., Mader, K., Melia, C.D., 2005. Pharmaceutical applications of magnetic resonance imaging (MRI). *Advanced Drug Delivery Reviews* 57, 1191-1209.
- Sherwood, J.L., Sung, J.C., Ford, R.M., Fernandez, E.J., Maneval, J.E., Smith, J.A., 2003. Analysis of bacterial random motility in a porous medium using magnetic resonance imaging and immunomagnetic labelling. *Environmental Science & Technology* 37, 781-785.
- Snaar, J.E.M., Van As, H., 1992. Probing water compartments and membrane permeability in plant cells by H^1 NMR relaxation measurements. *Biophysical Journal* 63, 1654-1658.
- Su, D., McCartney, D., Wang, Q., 2006. Comparison of free air space test methods. *Compost Science & Utilization* 14, 103-113.
- Tremier, A., de Guardia, A., Massiani, C., Paul, E., Martel, J.L., 2005. A respirometric method for characterising the organic composition and biodegradation kinetics and the temperature influence on the biodegradation kinetics, for a mixture of sludge and bulking agent to be co-composted. *Bioresource Technology* 96, 169-180.
- Van Dusschoten, D., De Jager, P.A., Van As, H., 1995. Extracting diffusion constants from echo-time-dependent PFG NMR data using relaxation-time information. *Journal of Magnetic Resonance Series A* 116, 22-28.
- Xu, Y., Araujo, C.D., MacKay, A.L., Whittall, K.P., 1996. Proton spin-lattice relaxation in wood - T-1 related to local specific gravity using a fast-exchange model. *Journal of Magnetic Resonance Series B* 110, 55-64.
- Ziegler, G.R., MacMillan, B., Balcom, B.J., 2003. Moisture migration in starch molding operations as observed by magnetic resonance imaging. *Food Research International* 36, 331-340.

Figure 1

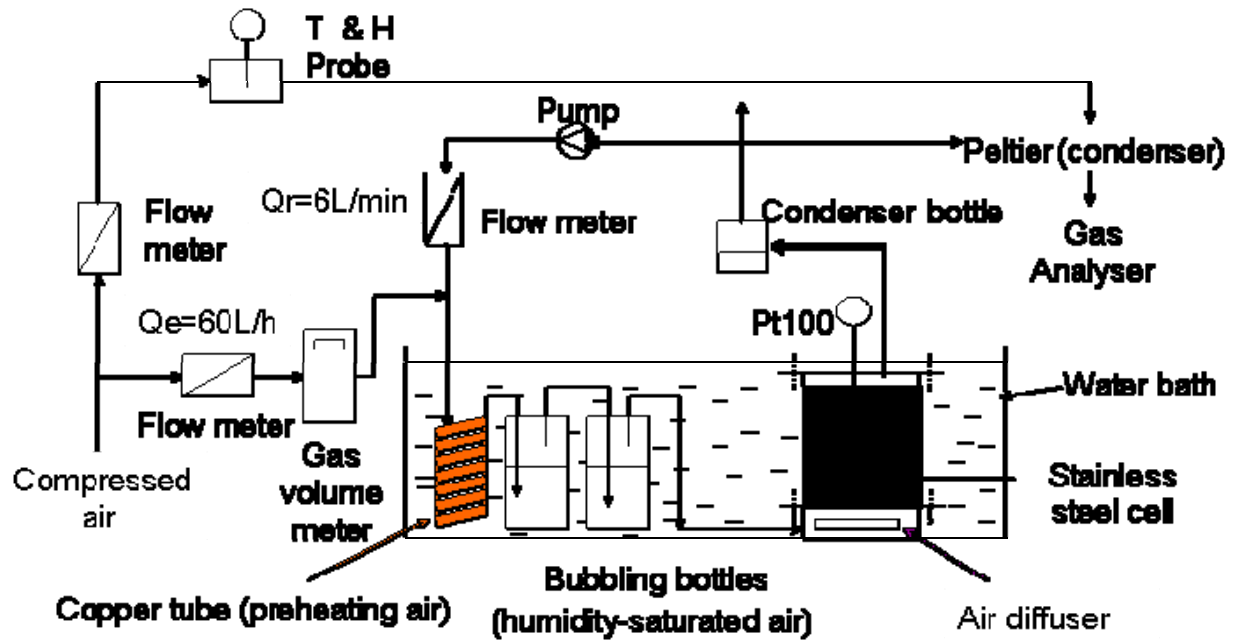


Figure 2

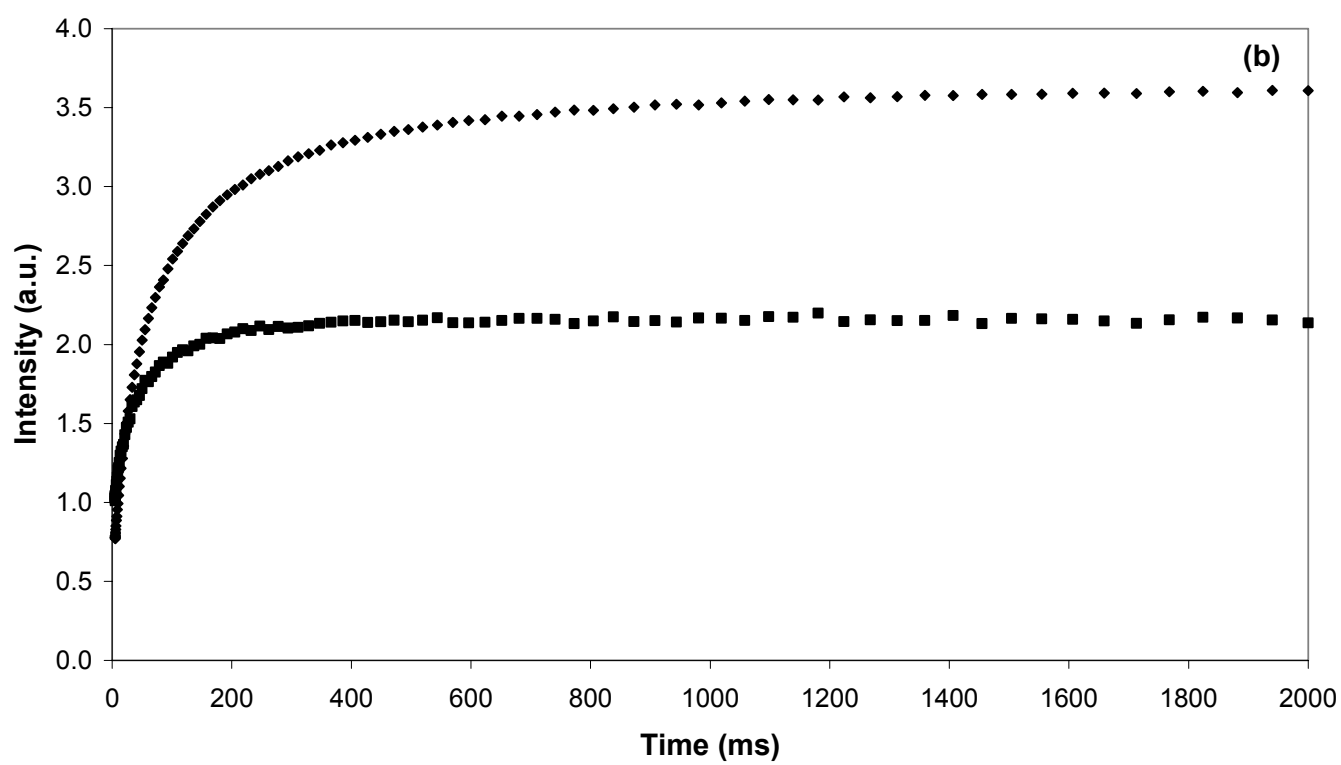
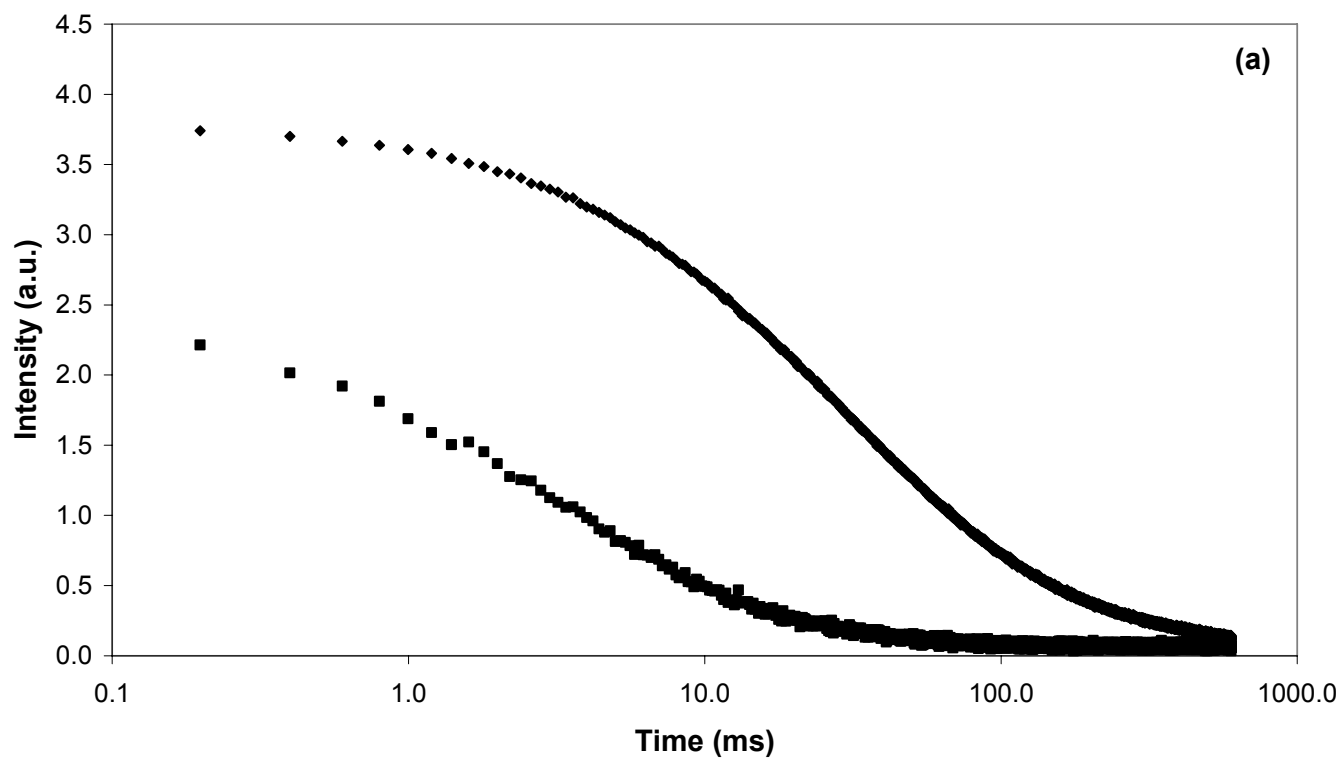


Figure 3

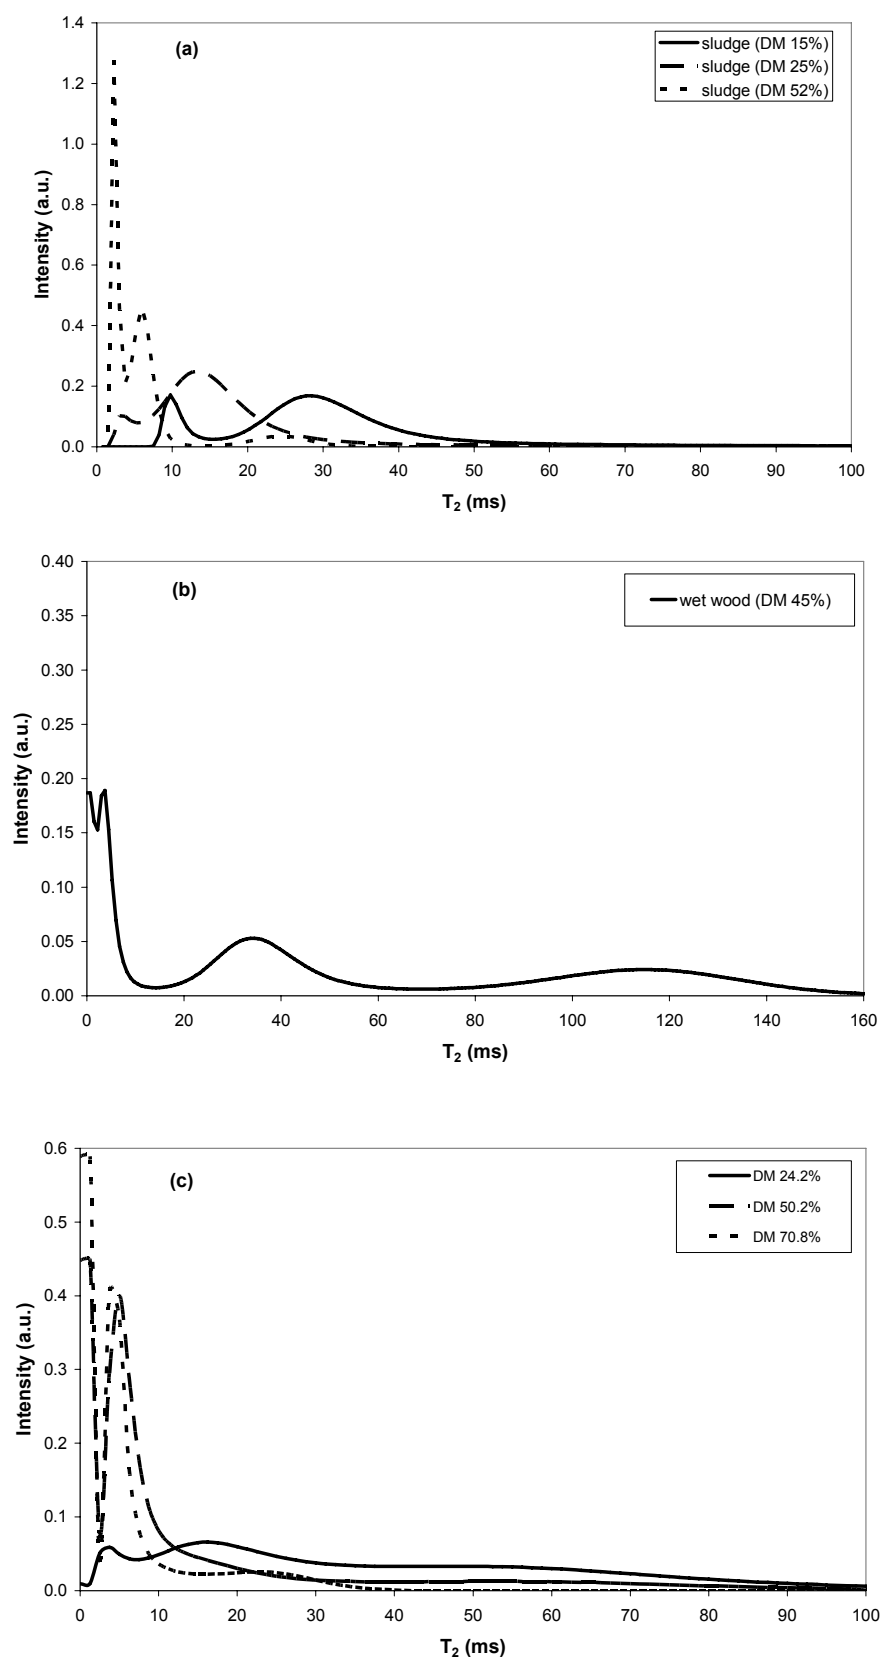


Figure 4

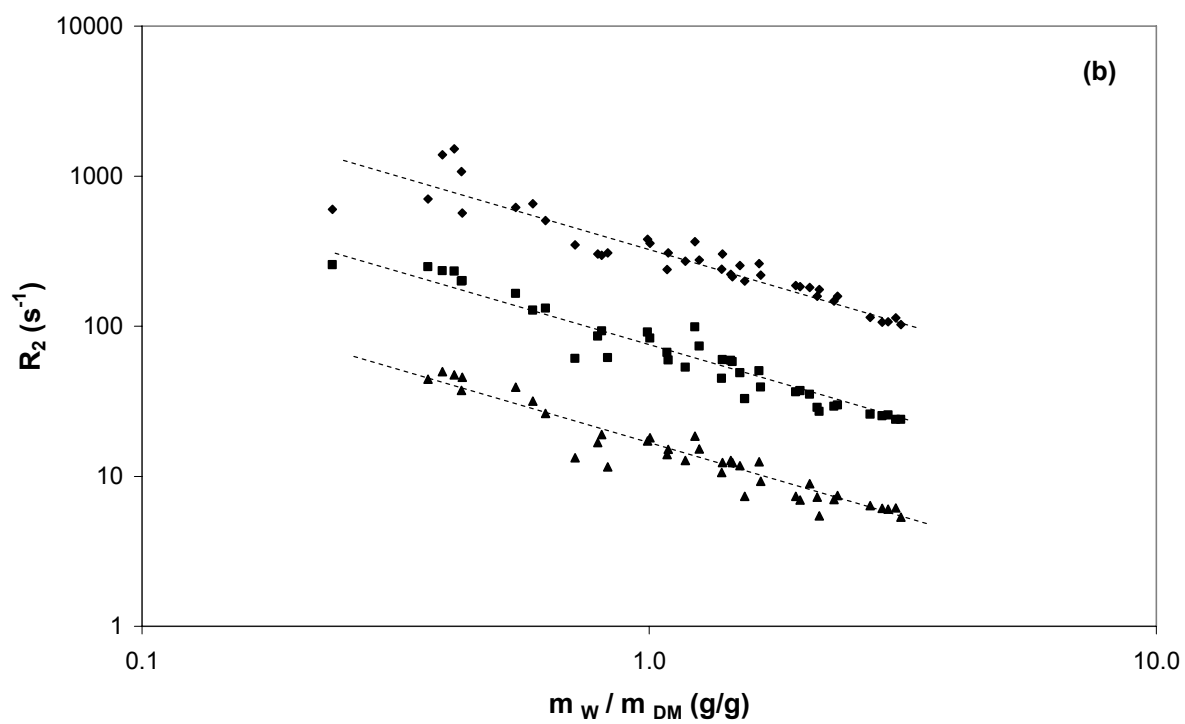
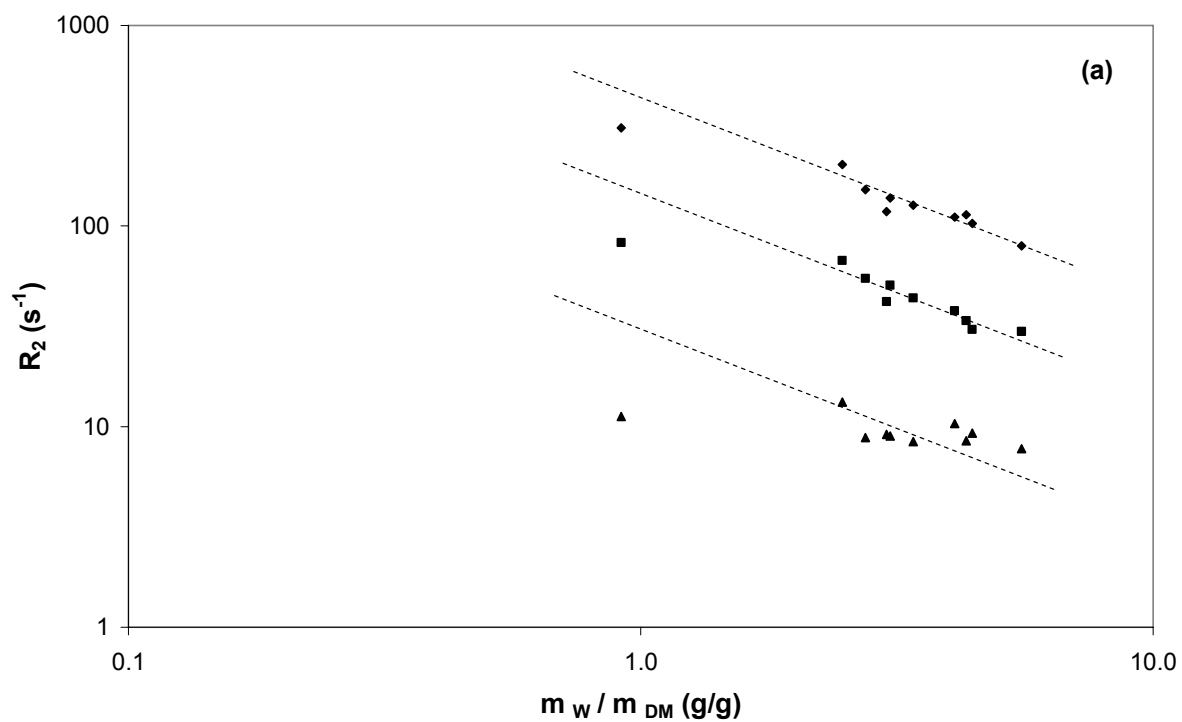


Figure 5

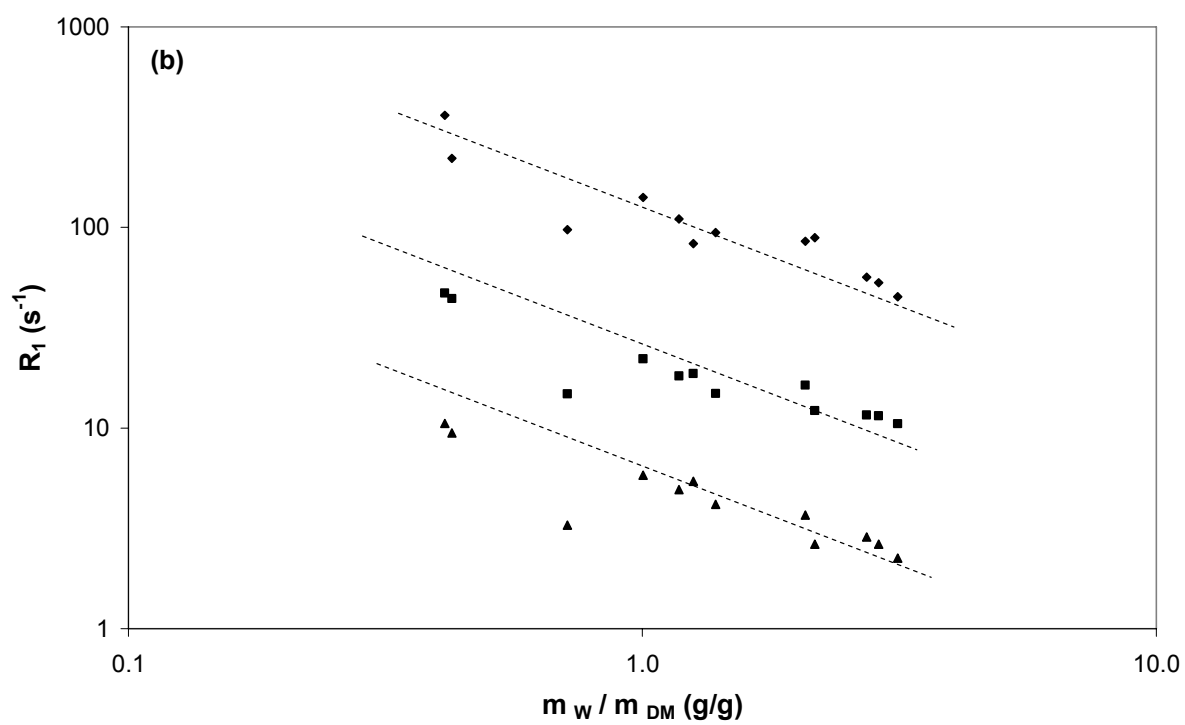
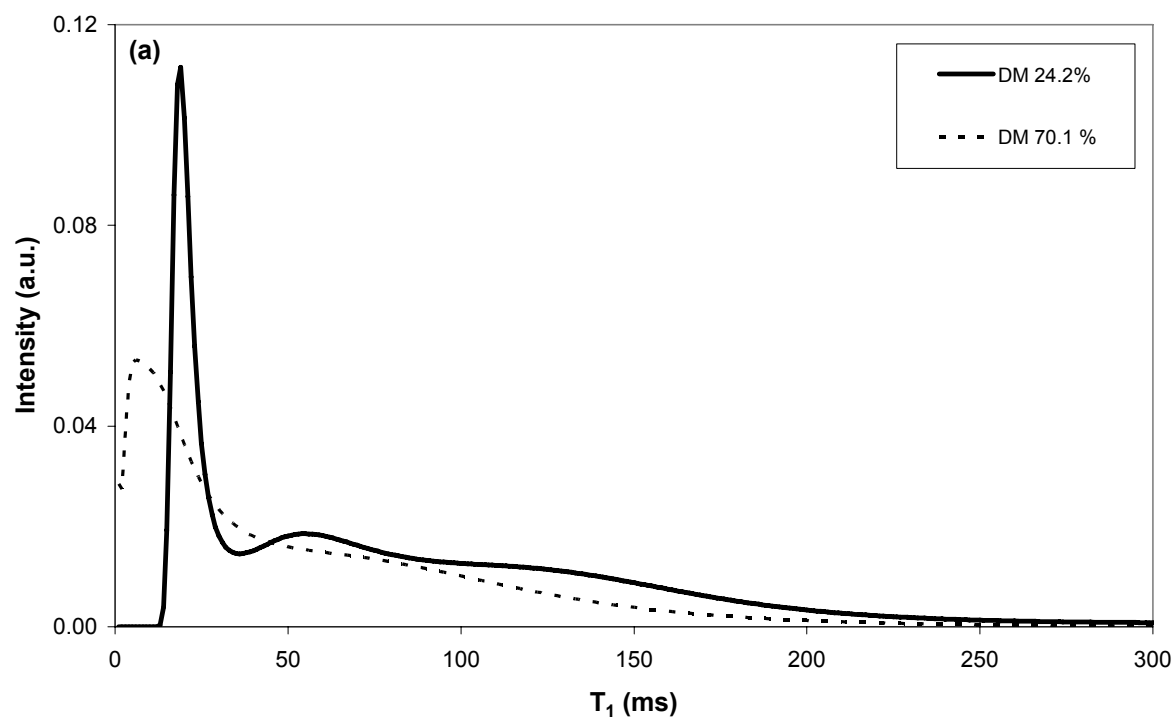


Figure 6

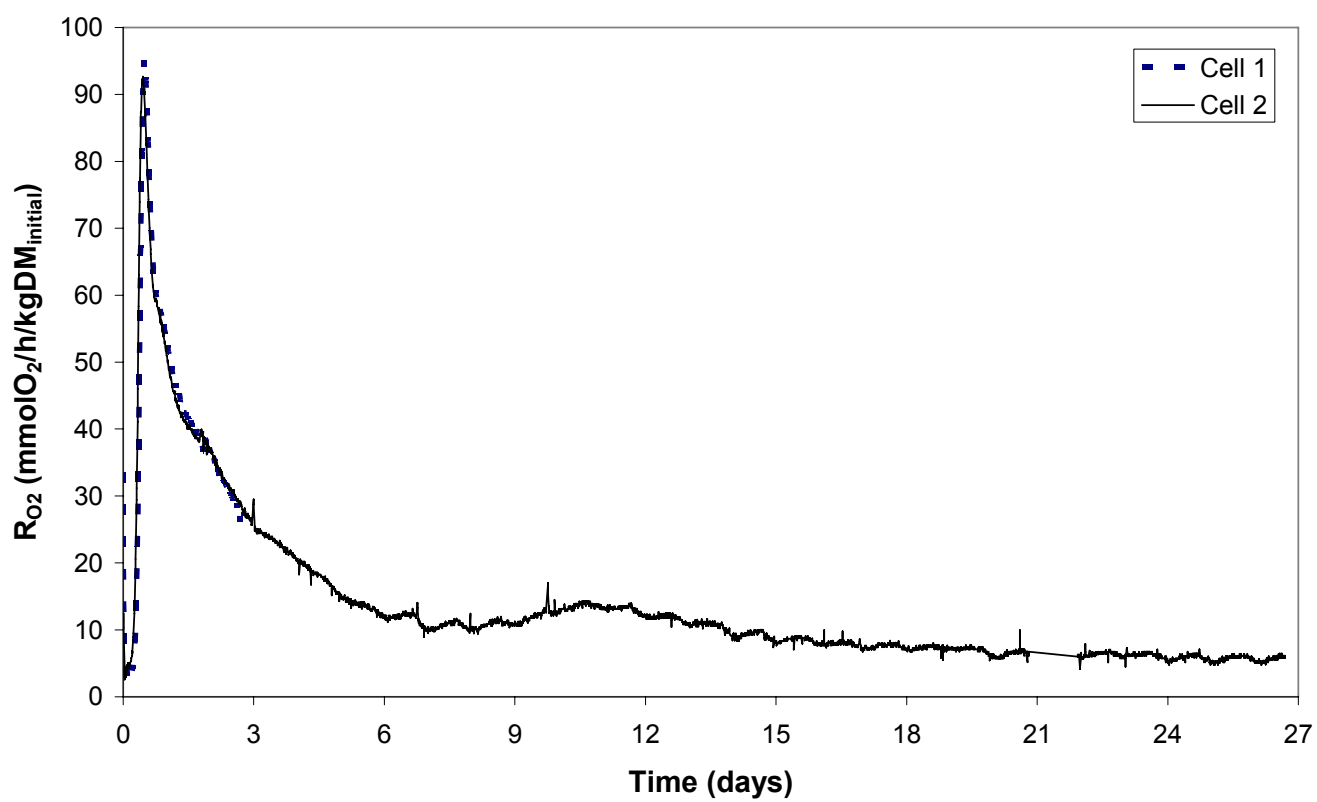


Figure 7

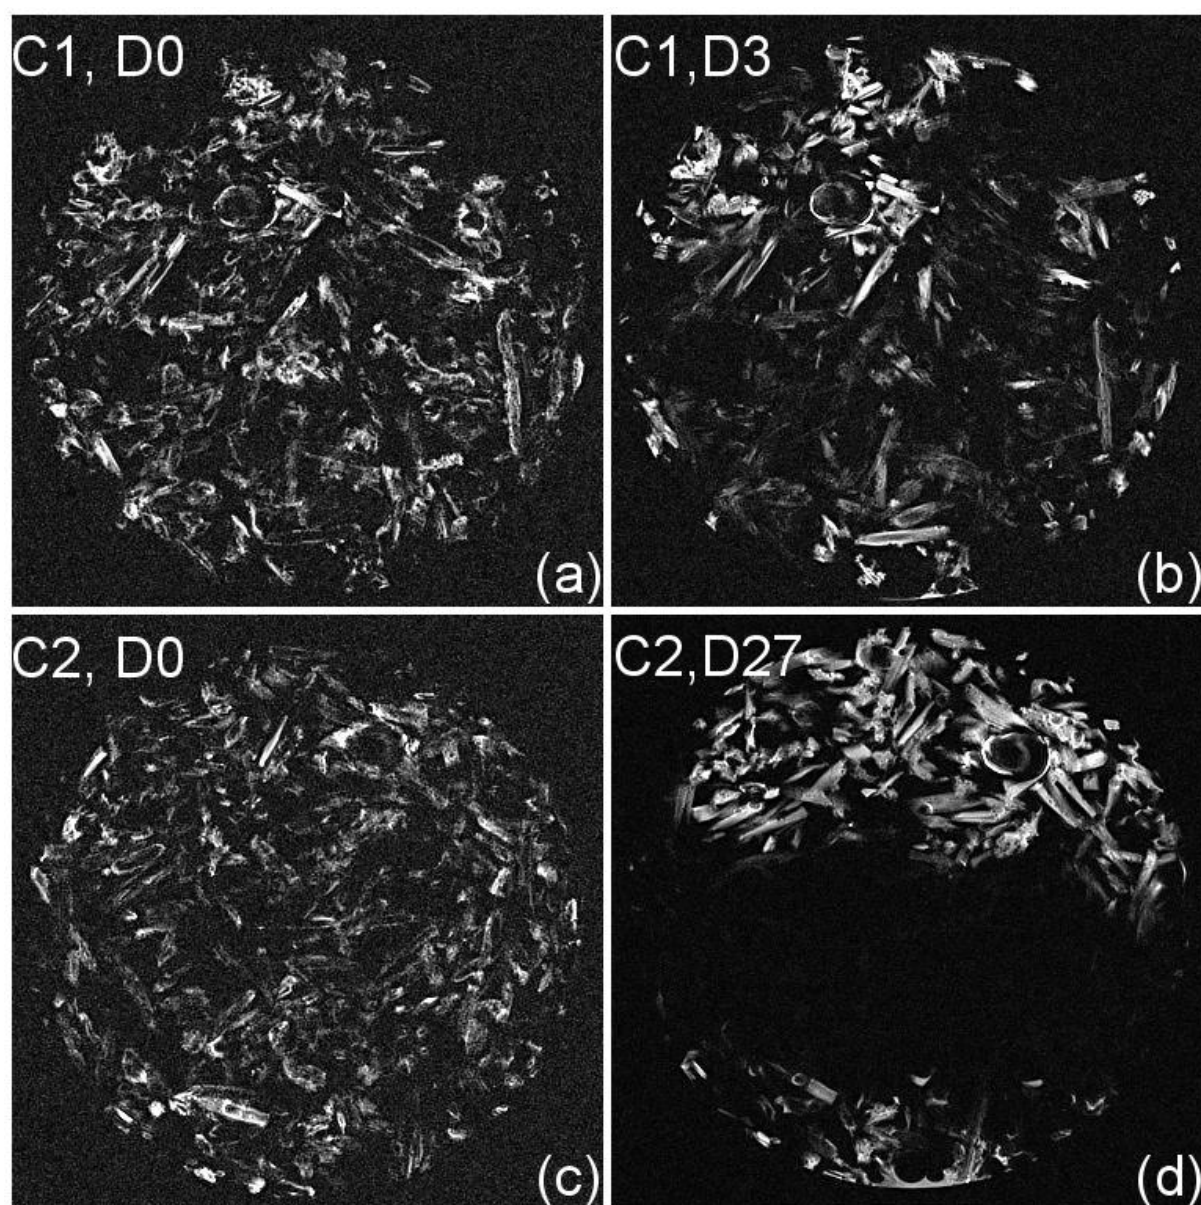


Figure 8

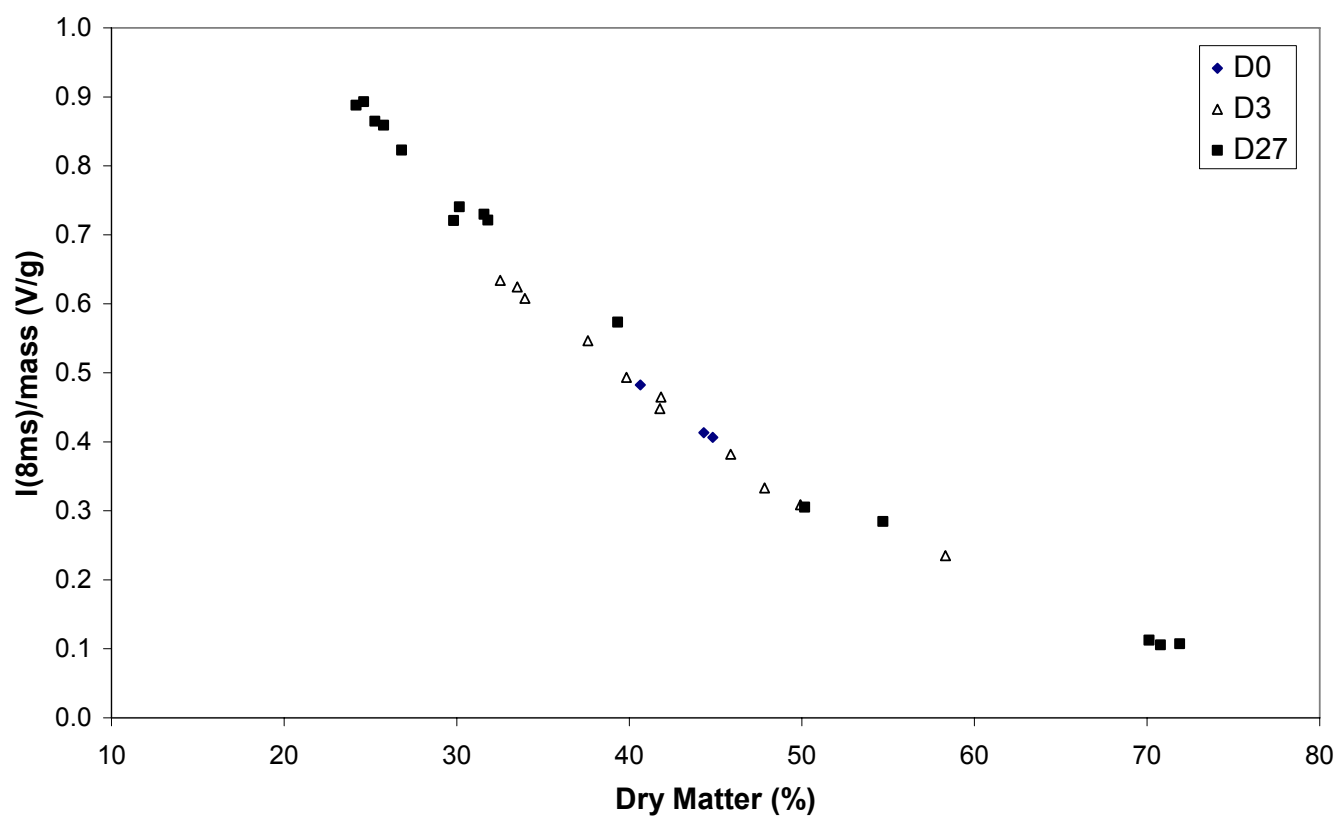


Figure 9

