

How many reservoirs should we build in France to maintain water availability under a changing climate?

Vazken Andréassian, Guillaume Thirel, Charles Perrin

▶ To cite this version:

Vazken Andréassian, Guillaume Thirel, Charles Perrin. How many reservoirs should we build in France to maintain water availability under a changing climate? EGU General Assembly, Apr 2015, Vienne, Austria. pp.23, 2015. hal-02601309

HAL Id: hal-02601309 https://hal.inrae.fr/hal-02601309v1

Submitted on 13 Sep 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

How many reservoirs should we build in France to maintain water availability under a changing climate?

Vazken Andréassian, Guillaume Thirel, Charles Perrin








Why asking this question here in Vienna?



Why asking this question here in Vienna?

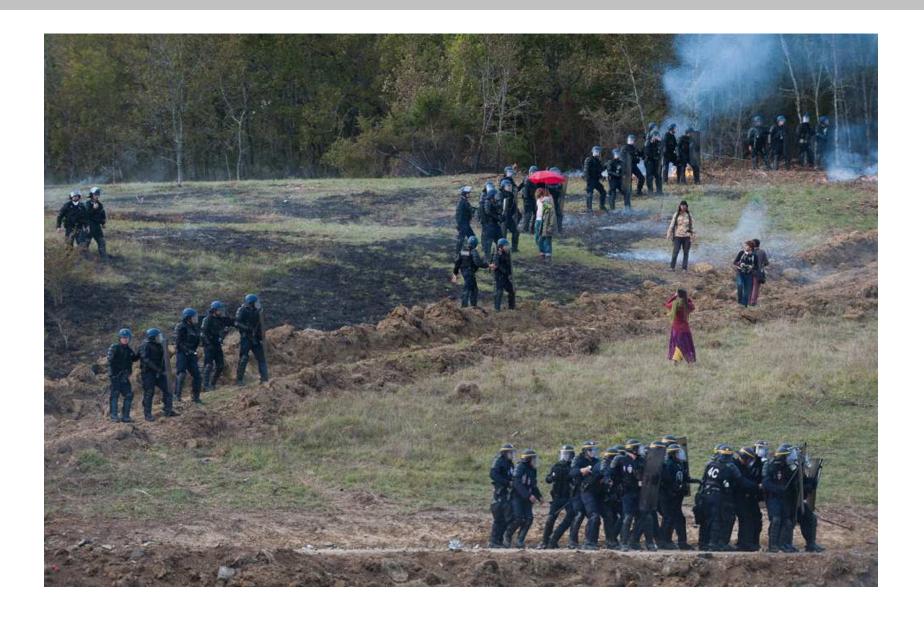



Why asking this question here in Vienna?





Water wars

'if the wars of this century were fought over oil, the wars of the next century will be fought over water' Ismaïl Serageldin (former vice President of the World Bank)





Water wars

'if the wars of this century were fought over oil, the wars of the next century will be fought over water' Ismaïl Serageldin (former vice President of the World Bank)



RIVIÈRES



Water wars - civil wars?





Building reservoirs to adapt to climate change?

Building reservoirs is one of the possibilities to adapt to the hydrological impact of climate change

Decline of streamflow vs decline of water resources



What part of natural flow can be considered a 'water resource'?

- Journalists & hydrologists very often use the expression 'water resources' as a synonym for 'river / groundwater flow'.
- National and international databases often do the same (i.e. AQUASTAT-FAO, EUROSTAT, World Bank databases)
 - 'internal water resources': totality of the 'blue' water flow originating on the territory of a country
 - 'external water resources': amount of water flowing to this country.




What part of natural flow can be considered a 'water resource'?

- These definitions imply that the entire water flow is a resource and we all know that it is not true
- Quantifying water resources is more complex than just quantifying river/groundwater flow. One must account for the flow-to-resource conversion efficiency:
 - less that 100%
 - reduced by the irregularity of the given river regime
 - reduced by the amount of in-stream reserved flows
 - affected (positively or negatively) by the seasonality of the water demand
 - increased by the construction of reservoirs
 - potentially affected by climate change.




Reservoirs allow turning a larger part of the natural river flow into a 'usable' water resource

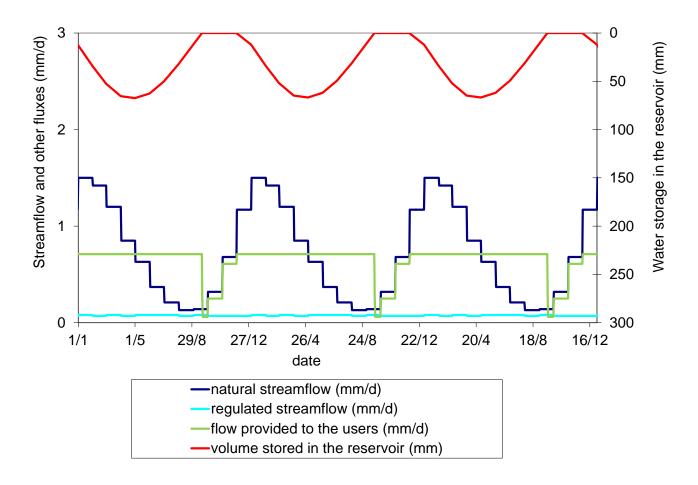





- We can simulate the long-term effect of reservoirs on the flow-to-resource conversion efficiency:
 - Based on long-term (> 30 years) daily flow records
 - Assuming a pattern of water demand

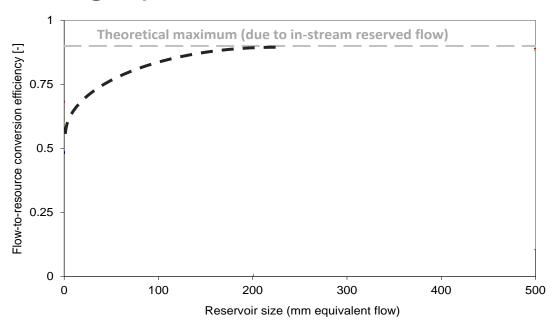



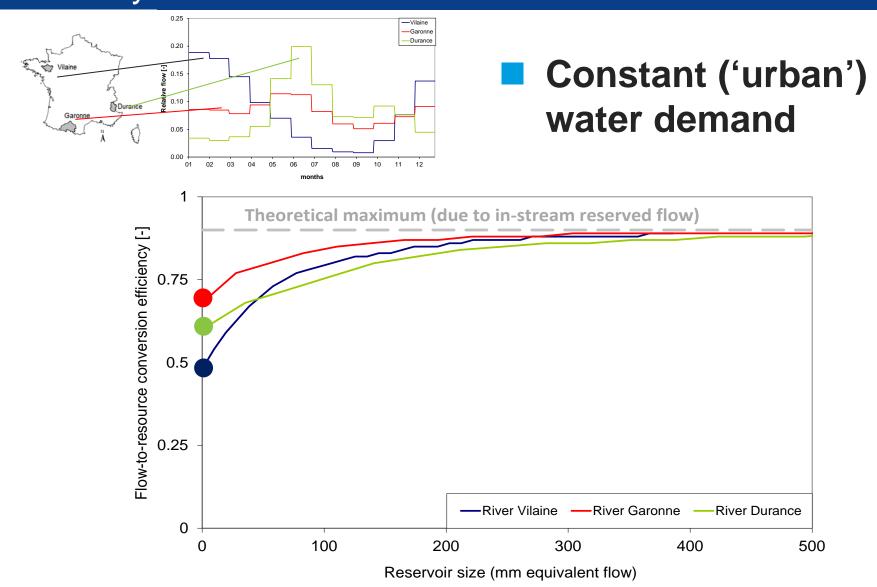

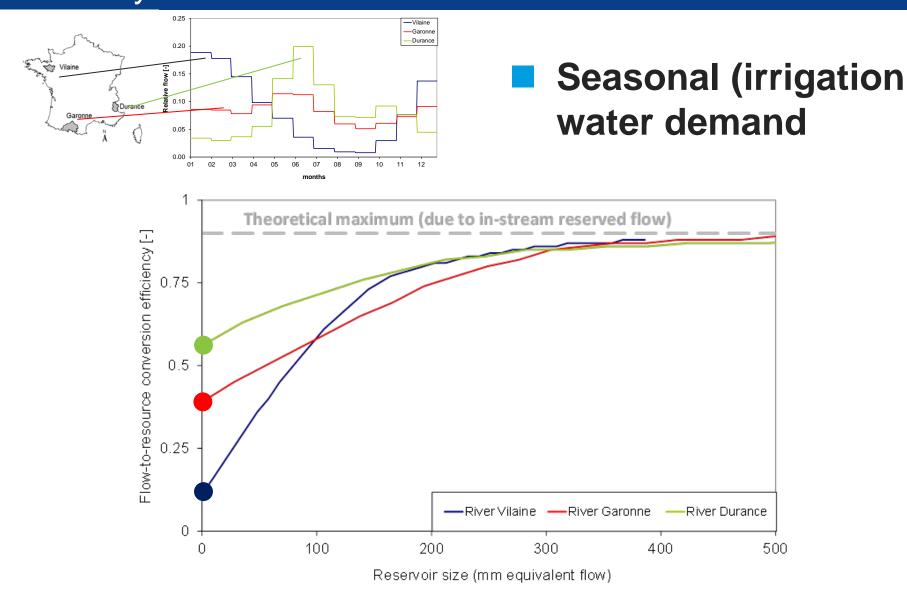



Synthesis

The flow-to-resource conversion efficiency:


- less that 100%
- reduced by the irregularity of the given river regime
- reduced by the amount of in-stream reserved flows
- depends on the seasonality of the water demand

In the perspective of climate change:

⇒ What would be the <u>minimum</u> reservoir size that would allow to mitigate the hydrological impact of climate change?



Maintaining water resources under a changing climate

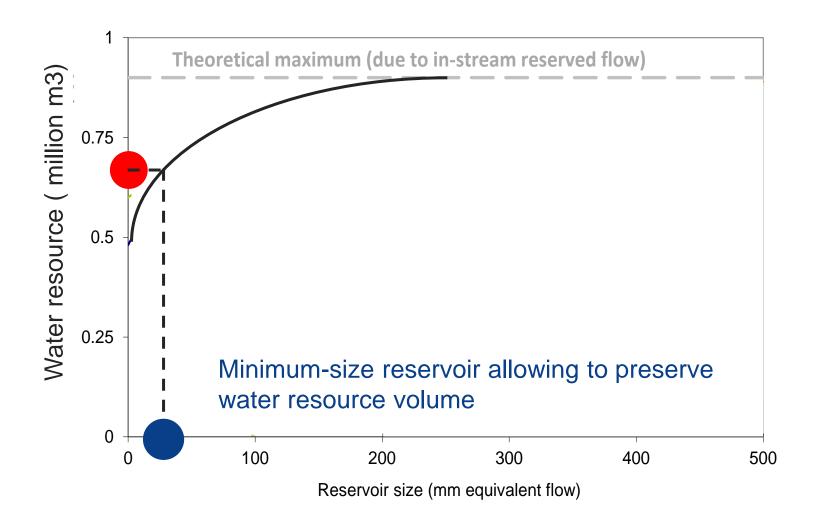



Building reservoirs to mitigate the hydrological impact of climate change?

CMIP5 (WRCP) projections were used


- Representative Concentration Pathway 8.5 (the worst case scenario)
- CNRM/CERFACS Global Circulation Model (CNRM-CM5)
- Downscaling method: Advanced Delta Change (van Pelt et al., 2012)
- precipitation and temperature projections: 52 years of climate data whose statistics are representative of the 2071–2100 period
- Dataset of 844 French catchments
- GR4J model to simulate flows under climate change

Van Pelt, S., J. Beersma, T. Buishand. 2012. Future changes in extreme precipitation in the Rhine basin based on global and regional climate model simulations. Hydrology and Earth System Sciences 16, 4517-4530.

Perrin, C., Michel, C. and Andréassian, V., 2003. Improvement of a parsimonious model for streamflow simulation. Journal of Hydrology, 279: 275-289




Results - urban demand

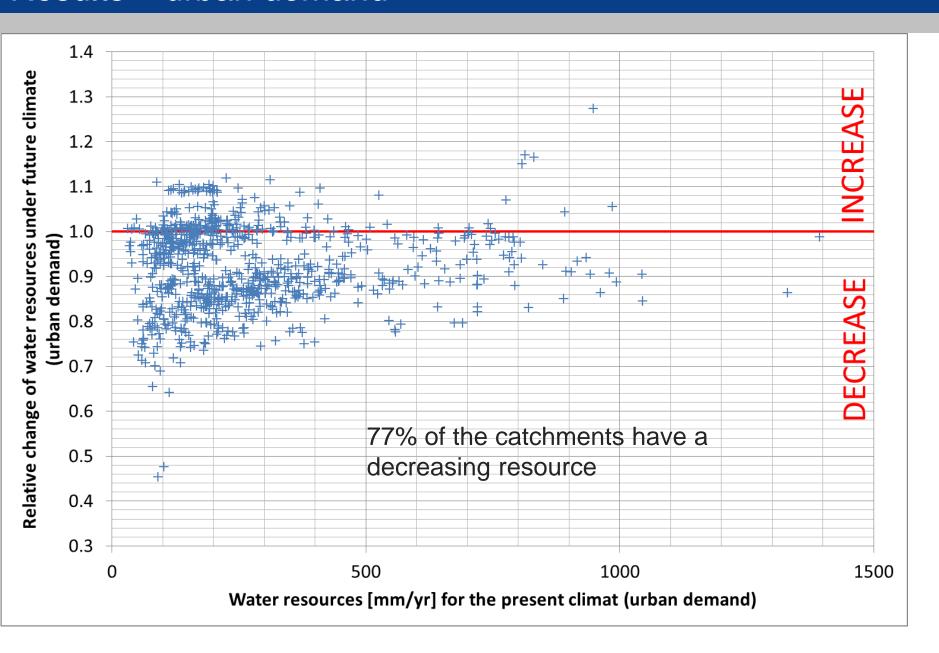




Results - agricultural demand

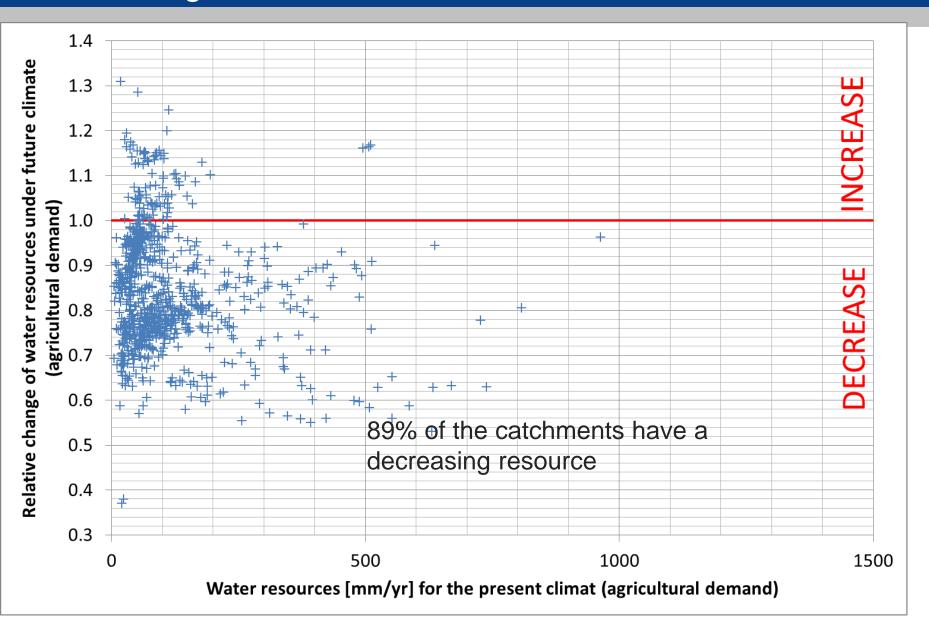



Results – urban demand

urban water demand

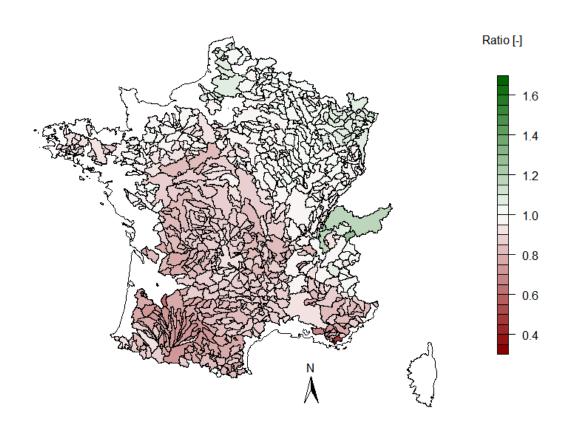


77% of the catchments have a decreasing resource



Results – agricultural demand

Irrigation water demand

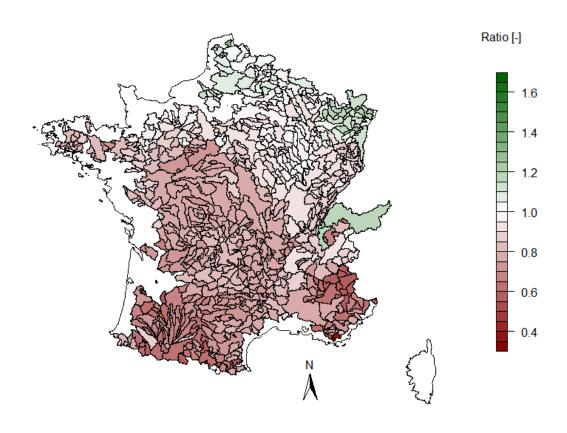

89% of the catchments have a decreasing resource



Conclusion: size of the reservoirs needed

Seine @ Paris (44 000 km²)

Urban demand : 0.08 10⁹ m³

□ Irrigation demand : 0.1 10⁹ m³

Loire @ Montjean (110 000 km²)

Urban demand : 2.6 10⁹ m³

□ Irrigation demand : 0.1 10⁹ m³

Rhône @ Beaucaire (96 000 km²)


Urban demand: 1.8 10⁹ m³

□ Irrigation demand : 0.9 10⁹ m³

Garonne @ Mas d'Agenais (50 000 km²)

Urban demand: 4.1 10⁹ m³

⇒ Irrigation demand : 1.0 10⁹ m³

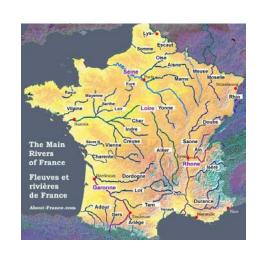

Thank you



