



**HAL**  
open science

## **GEO-PUMMA: Urban and periurban landscape representation for distributed hydrological modelling**

P. Sanzana, J. Gironas, Isabelle Braud, F. Branger, F. Rodriguez, X. Vargas,  
N. Hitschfeld, J.F. Munoz, S. Vicuna

► **To cite this version:**

P. Sanzana, J. Gironas, Isabelle Braud, F. Branger, F. Rodriguez, et al.. GEO-PUMMA: Urban and periurban landscape representation for distributed hydrological modelling. EGU General Assembly 2016, Apr 2016, Vienna, Austria. pp.1, 2016. hal-02605017v1

**HAL Id: hal-02605017**

**<https://hal.inrae.fr/hal-02605017v1>**

Submitted on 16 May 2020 (v1), last revised 20 Jul 2020 (v2)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.





# Geo-PUMMA: Urban and Peri-urban Landscape Representation Toolbox for Hydrological Distributed Modeling



P. Sanzana<sup>1,2</sup>, J. Gironás<sup>1,3</sup>, I. Braud<sup>2</sup>, F. Branger<sup>2</sup>, F. Rodriguez<sup>4</sup>, X. Vargas<sup>5</sup>, N. Hitschfeld<sup>6</sup>, J. Muñoz<sup>1</sup>, S. Vicuña<sup>1</sup>

1 DIHA, Pontificia Universidad Católica de Chile. ppsanzana@uc.cl, jgironas@ing.puc.cl, jfmunoz@ing.puc.cl, svicuna@ing.puc.cl  
 2 Irstea, UR HHLY, Hydrology-Hydraulics. isabelle.braud@irstea.fr, flora.branger@irstea.fr  
 3 Centro de Desarrollo Urbano Sustentable CONICYT/FONDAP/15110020.  
 4 LUNAM Université, IFSTTAR, IRSTV. fabrice.rodriquez@ifsttar.fr  
 5 DIC, FCFM, Universidad de Chile. xvargas@ing.uchile.cl  
 6 DCC, FCFM, Universidad de Chile. nancy@dcc.uchile.cl

Poster in Session  
 SSS9.14/HS11.34/NH1.25 - Soils, water, vegetation and landforms in urban and peri-urban areas: global change impacts and management issues  
 EGU2016-4933

## 1 Introduction and Objectives

- Geo-PUMMA** is a **GIS toolbox** to represent the terrain used in distributed hydrological modeling in urban and peri-urban areas, which preserves the hydrological connectivity and extracts a realistic drainage network.
- Geo-PUMMA** uses a vectorial approach that generates a polygonal mesh composed of physiographic units. Urban areas are represented using **Urban Hydrological Elements (UHE)** (Rodríguez et al., 2008). Rural and peri-urban areas are depicted using **Hydrological Response Units (HRU)** (Flügel, 1995). (Figure 1)
- Geo-PUMMA improves the **numerical stability** of hydrological models as it considers several segmentation processes to address the following issues in mesh representation: thin units, elements extremely non-convex, too large elements and homogeneous properties within an HRU (slope, aspect, etc).

## 2 Study site, available data

- The Mercier sub-catchment, France (7 km<sup>2</sup>, 10% urban) is covered with forests and crops.
- The peri-urban basin Estero El Guindo, Chile (6.5 km<sup>2</sup>, 50% urban) is covered by native vegetation (Figure 2).

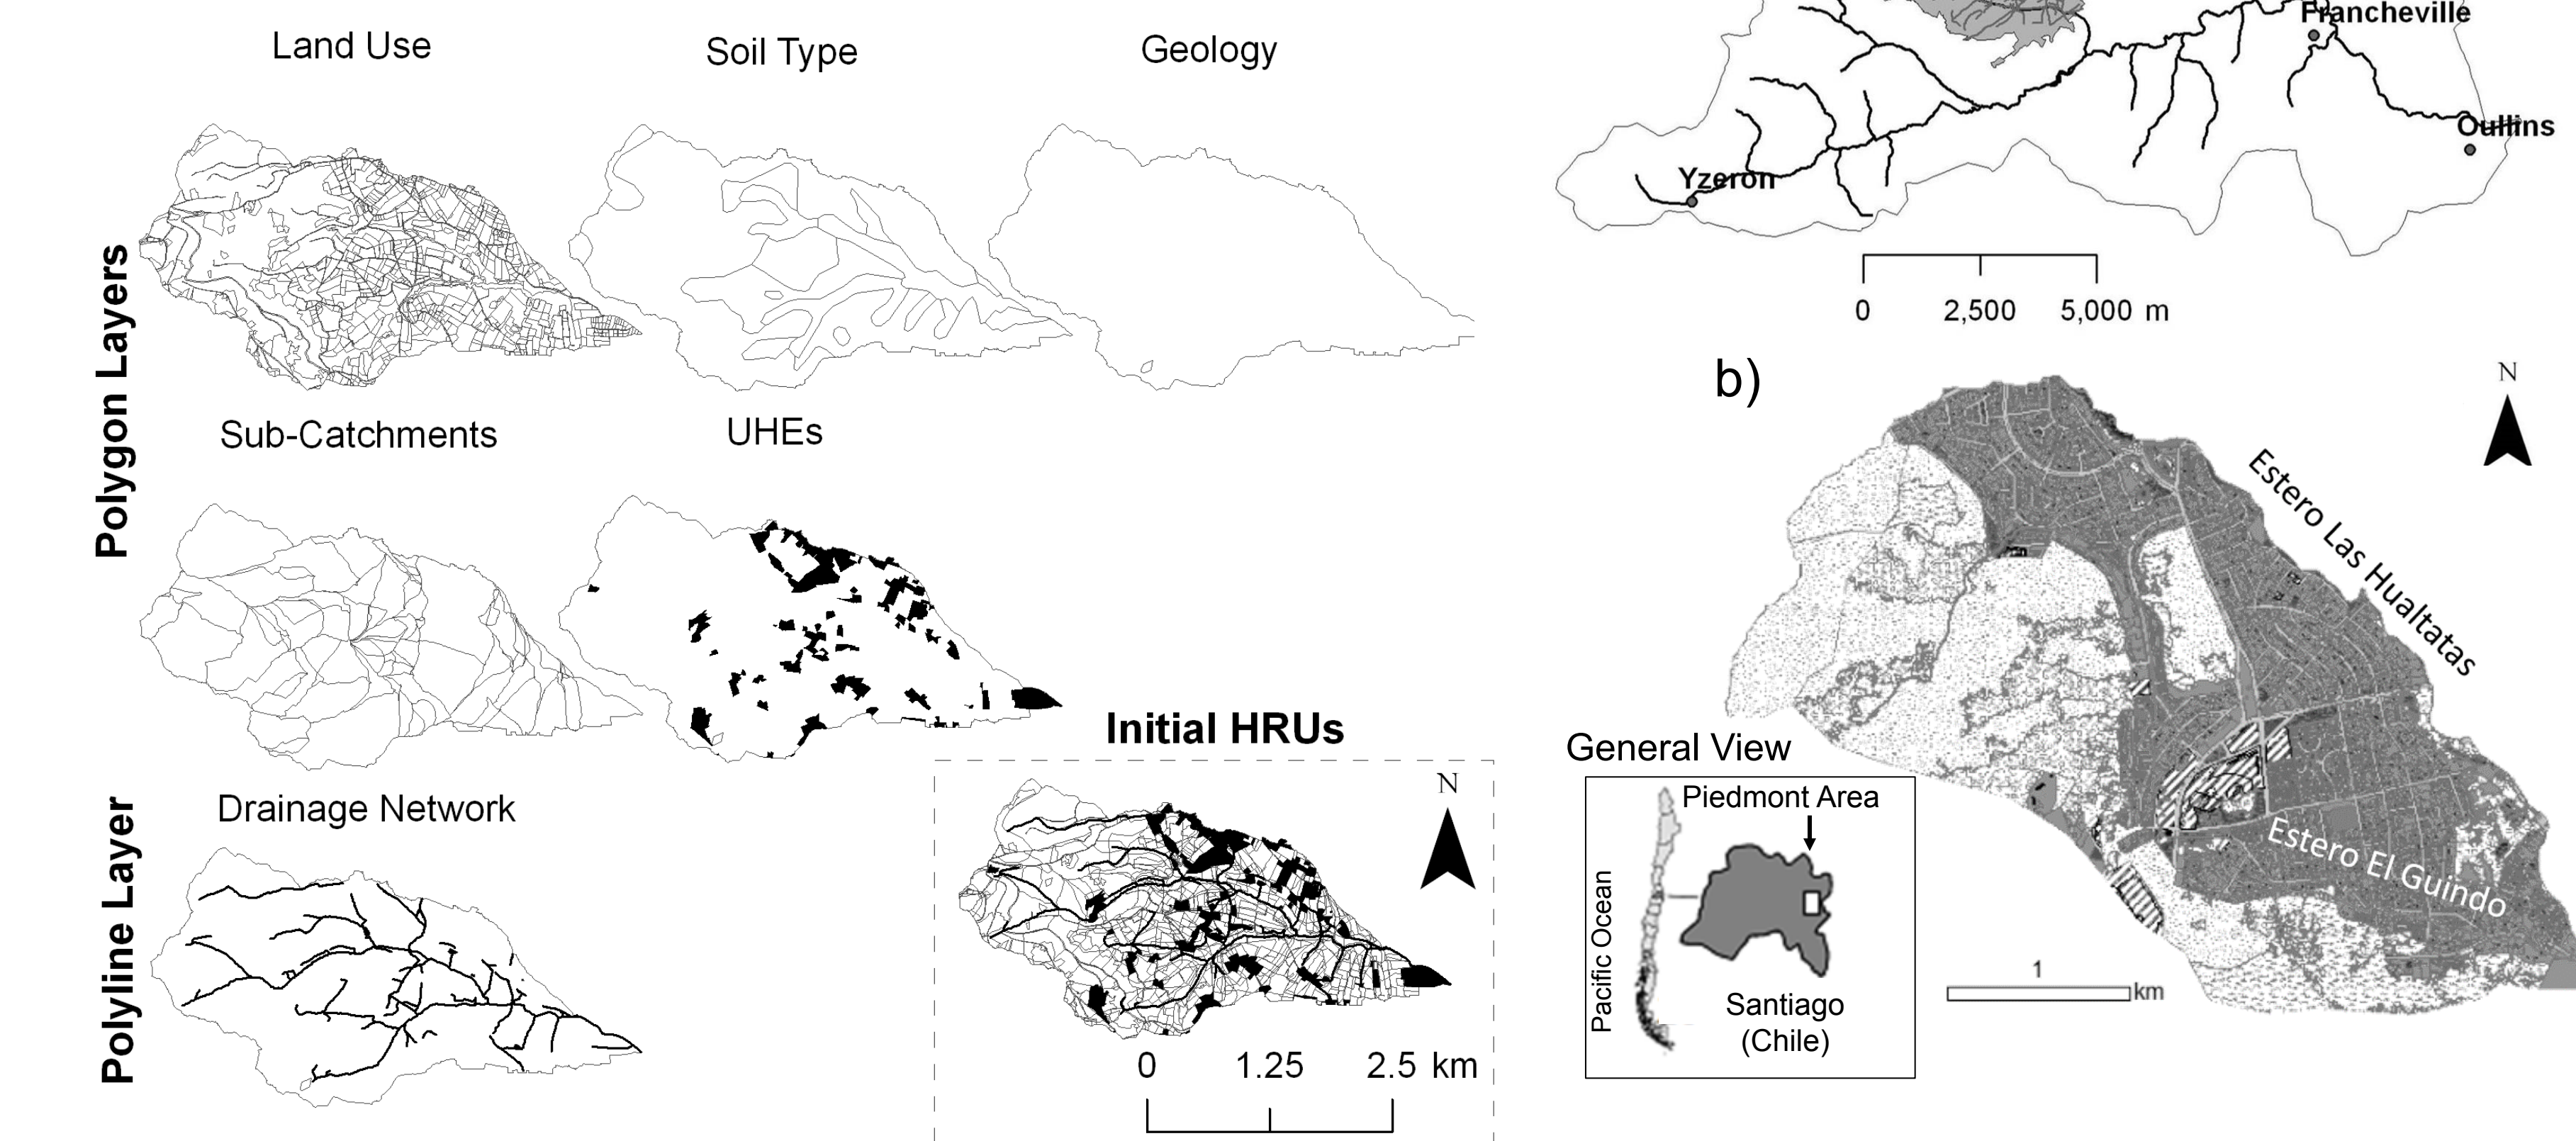


Figure 1.- Polygonal Mesh composed of HRUs and UHEs

Figure 2.- Catchments Mercier (a) and El Guindo (b)

- The initial HRUs were obtained using
- Land use map** (Jacqueminet et al., 2011; Guzmán 2014)
  - Pedology map** (SIRA, 2011; DGA-AC, 2000)
  - Geology map** (BRGM, 2011; DGA-AC, 2000)
  - Subcatchments** (Jankowsky et al., 2013; Sanzana et al., 2015)
  - Ditch network** (Jankowsky et al., 2011; DOH-EIC, 2004)
  - Sewer systems** (SIAHVY, DOH-EIC, 2004).
  - A **DEM** (Lidar, 2 m; Sarrazin, 2012) and contour lines 1: 5.000 (2,5 m) (DOH-EIC, 2004).

**References**  
 BRGM, (2010). Bureau de Recherches Géologiques et Minières. URL: <http://infoterre.brgm.fr/viewer/MainTileForward.do?sessionId=C6247604415C79ABC4729563FD5969E> (accessed 2010/09/21)  
 DGA-AC, 2000. Modelo de simulación hidrológica operacional cuencas de los ríos Maipo y Mapocho. Dirección General de Aguas. División de Estudios y Planificación, Ayala, Cabrera y Asociados Ingenieros Consultores Ltda.  
 DOH-EIC, 2004. Diagnóstico y proposición plan maestro de manejo de cauces naturales, cuenca del río Mapocho hasta estero las Huallatas, Región Metropolitana. Dirección de Obras Hidráulicas, EIC consultores.  
 Flügel W.-A. (1995). Delineating Hydrological Response Units by GIS analyses for regional hydrological Modelling using PRMS / MMS in the drainage basin of the river Bröl, Germany. Hydrological Processes, 9, pp. 423-436.  
 Guzman V. (2014). Generación de Mapas Catastrales para Mapocho Alto como insumo para Proyecto Fondecyt N°1131131.  
 Jacqueminet, C., Kermad, S., Michel, K., Béal, D., Gagnage, M., Branger, F., Jankowsky, S., Braud, I., 2013. Land cover mapping using aerial and VHR satellite images for distributed hydrological modelling of periurban catchments: application to the Yzeron catchment (Lyon, France). Journal of Hydrology, 485, 68-83.  
 Jankowsky, S., Branger, F., Braud, I., Gironás, J., Rodríguez, F., 2013. Comparison of catchment and network delineation approaches in complex suburban environments: application to the Chaudanne catchment, France. Hydrological Processes 27, 3747-3761.  
 SIRA, (2011). Sol Info Rhône-Alpes. <http://www.rhone-alpes.chambagri.fr/sira/> (accessed 31 July 2011).  
 Sanzana, P., Jankowsky, S., Branger, F., Braud, I., Vargas, X., Hitschfeld, N., Gironás, J., 2013. Computer-assisted mesh generation based on hydrological response units for distributed hydrological modeling. Computers & Geosciences 57, 32-43.  
 Sarrazin, B., 2012. Approches spatiales pour décrire le réseau de drainage et suivre sa dynamique de fonctionnement en milieu rural dans une perspective d'aide à la modélisation hydrologique. Ecole doctorale Terre, Univers, Environnement, l'Institut National Polytechnique de Grenoble.  
 Schwartz, C., 2008. Deriving Hydrological Response Units (HRUs) using a Web Processing Service implementation based on GRASS-GIS. Geoinformatics FCE CTU 2008. Workshop Proceedings, vol. 3, pp. 67-78

## 3 Geo-PUMMA

The proposed methodology has four steps.

Step 1 (A): data collection, digitalization and quality improvement of all the maps (Figure 3)

Step 2 (B-UHE) : representation of the urban area: all UHEs delineated and characterized using attributes such as average height, area, imperviousness, green area, and distance to the closest sewer or street.

Step 3 (B-HRU): improvement of initial HRUs segmentation to address geometric constraints


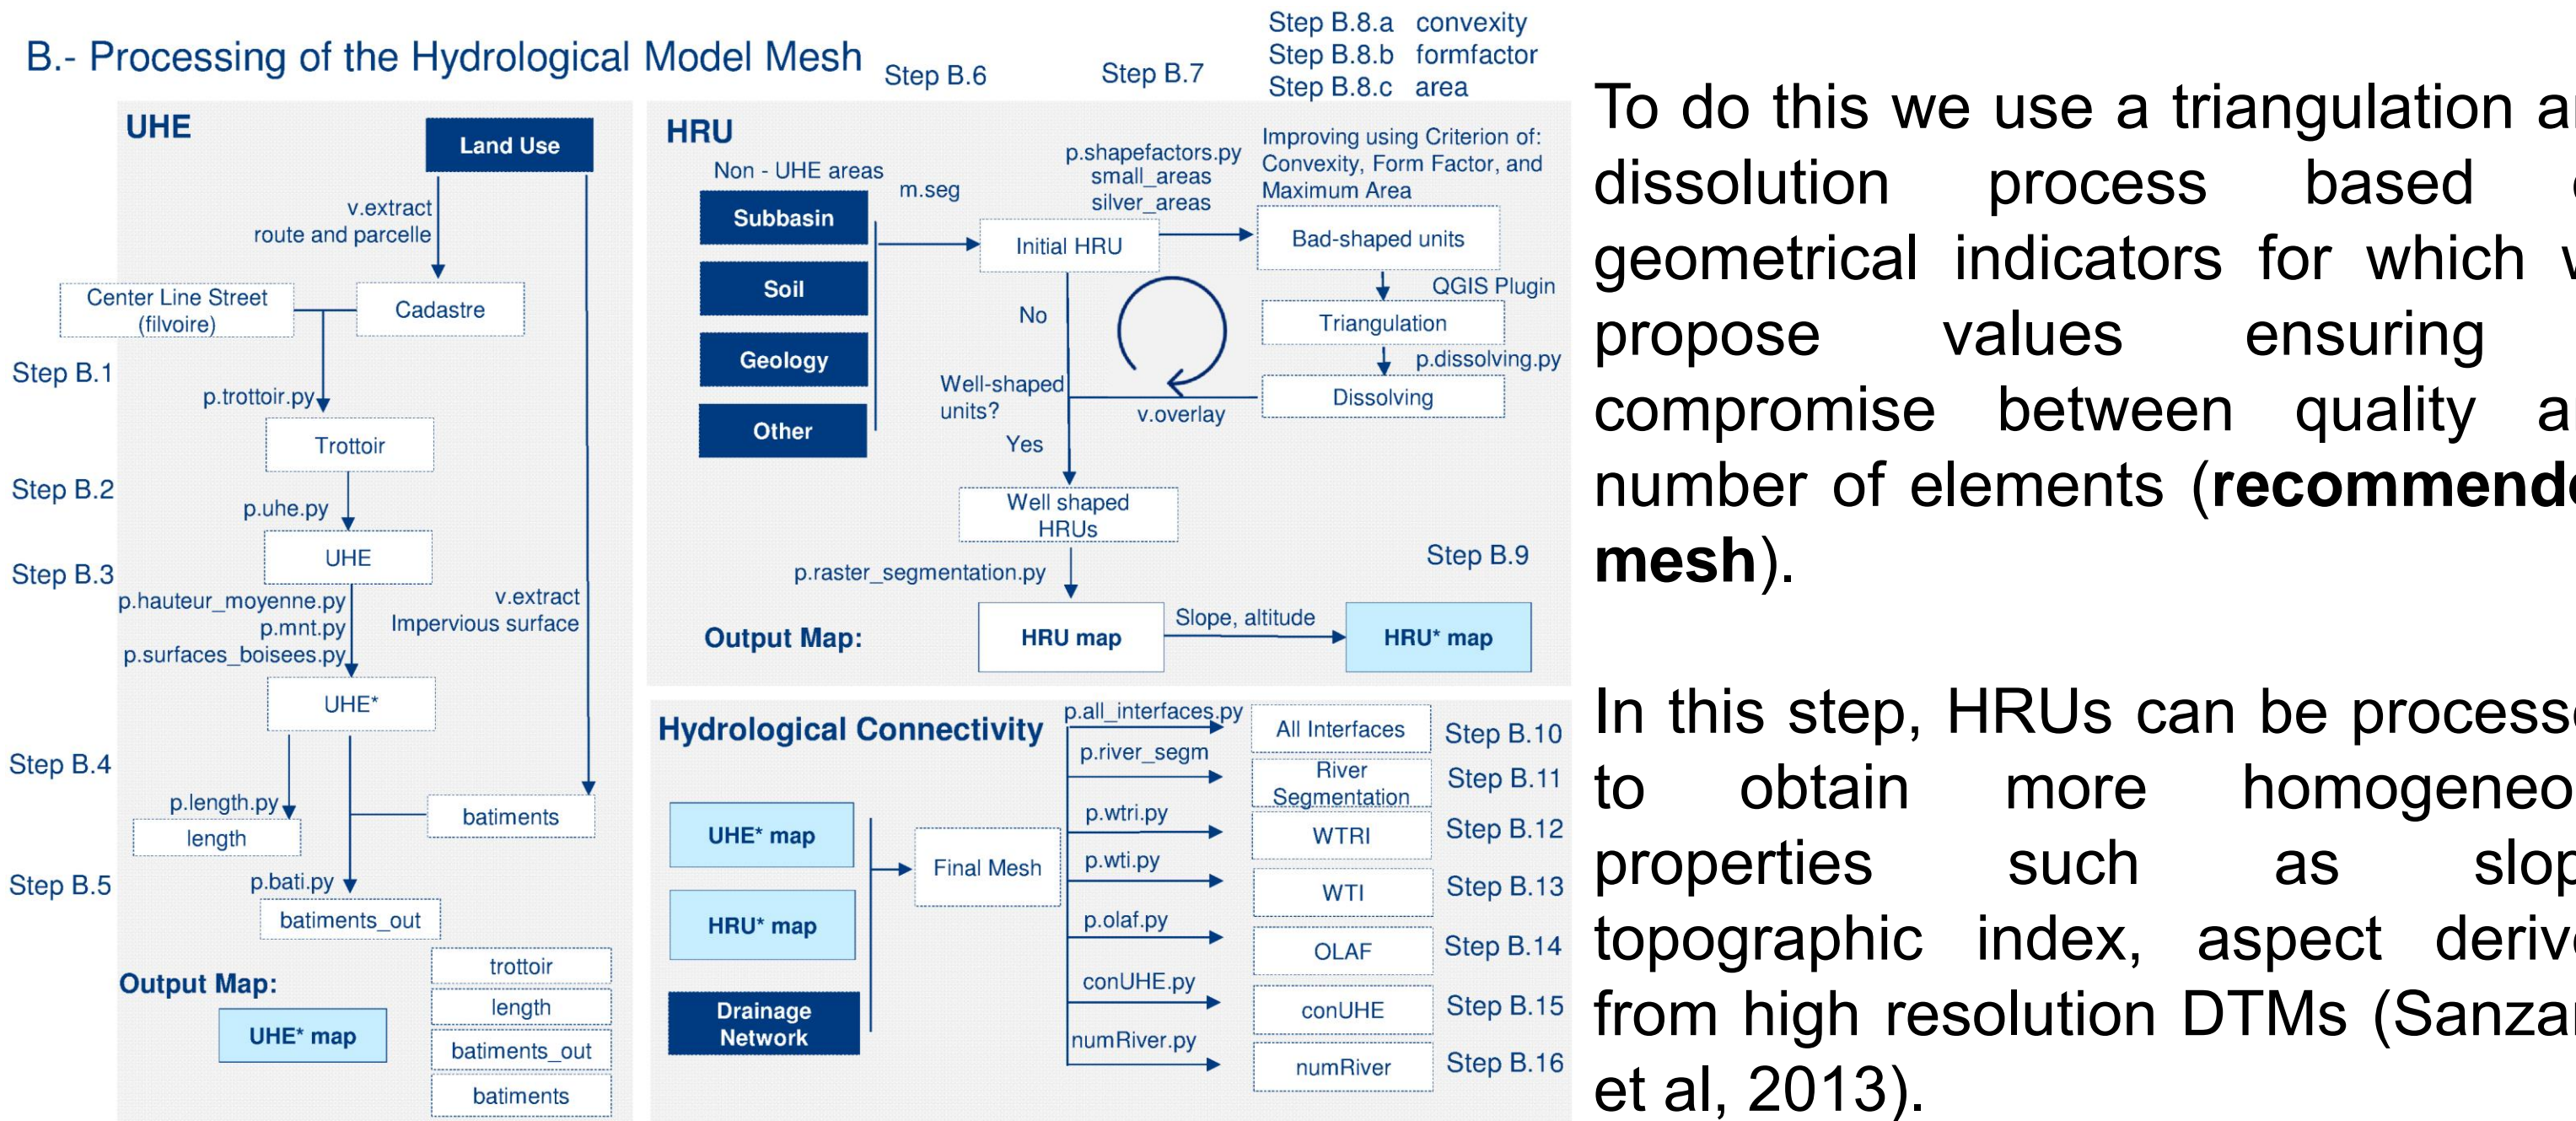


Figure 4.- Step B-UHE; Step B-HRU; Step B-Hydrological Connectivity

Step 4 (B-Hydrological Connectivity): extract the hydrological connectivity between the different units, using a recursive algorithm for identifying surface flow directions. This drainage network is composed of channelized and non-channelized elements.


Figure 5 illustrates the main task of Step 3, showing the effect of the segmentation of a street, represented by a narrow and thin polygon. Figure 6 shows several steps of OLAF routine (main task of Step 4).

Figure 5. Segmentation of thin and narrow units

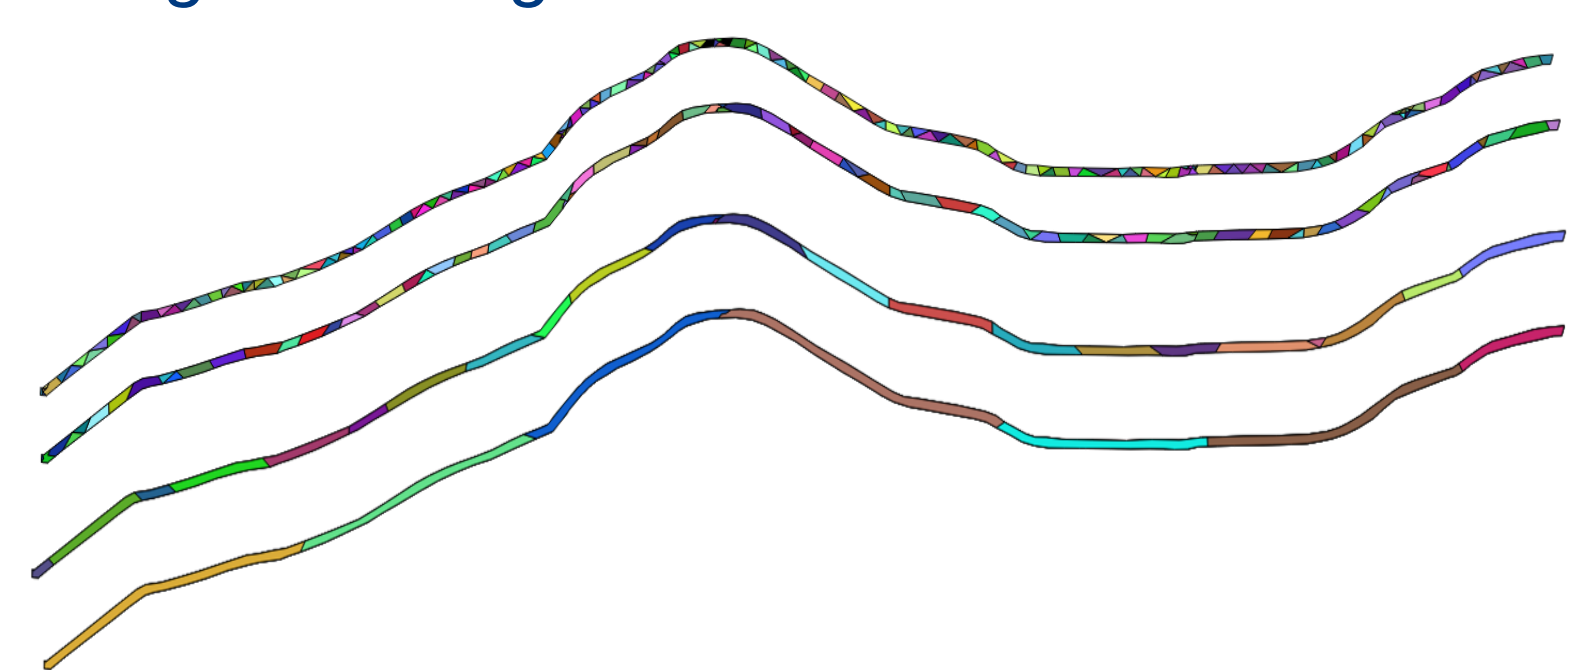

Form Factor Threshold	Initial HRU	HRU Triangulated	HRU Dissolved FFT	Satisfactory
0.75	1	259	185	No
0.50	1	259	84	No
0.20	1	259	23	No
0.10	1	259	7	OK

Figure 6. OLAF steps

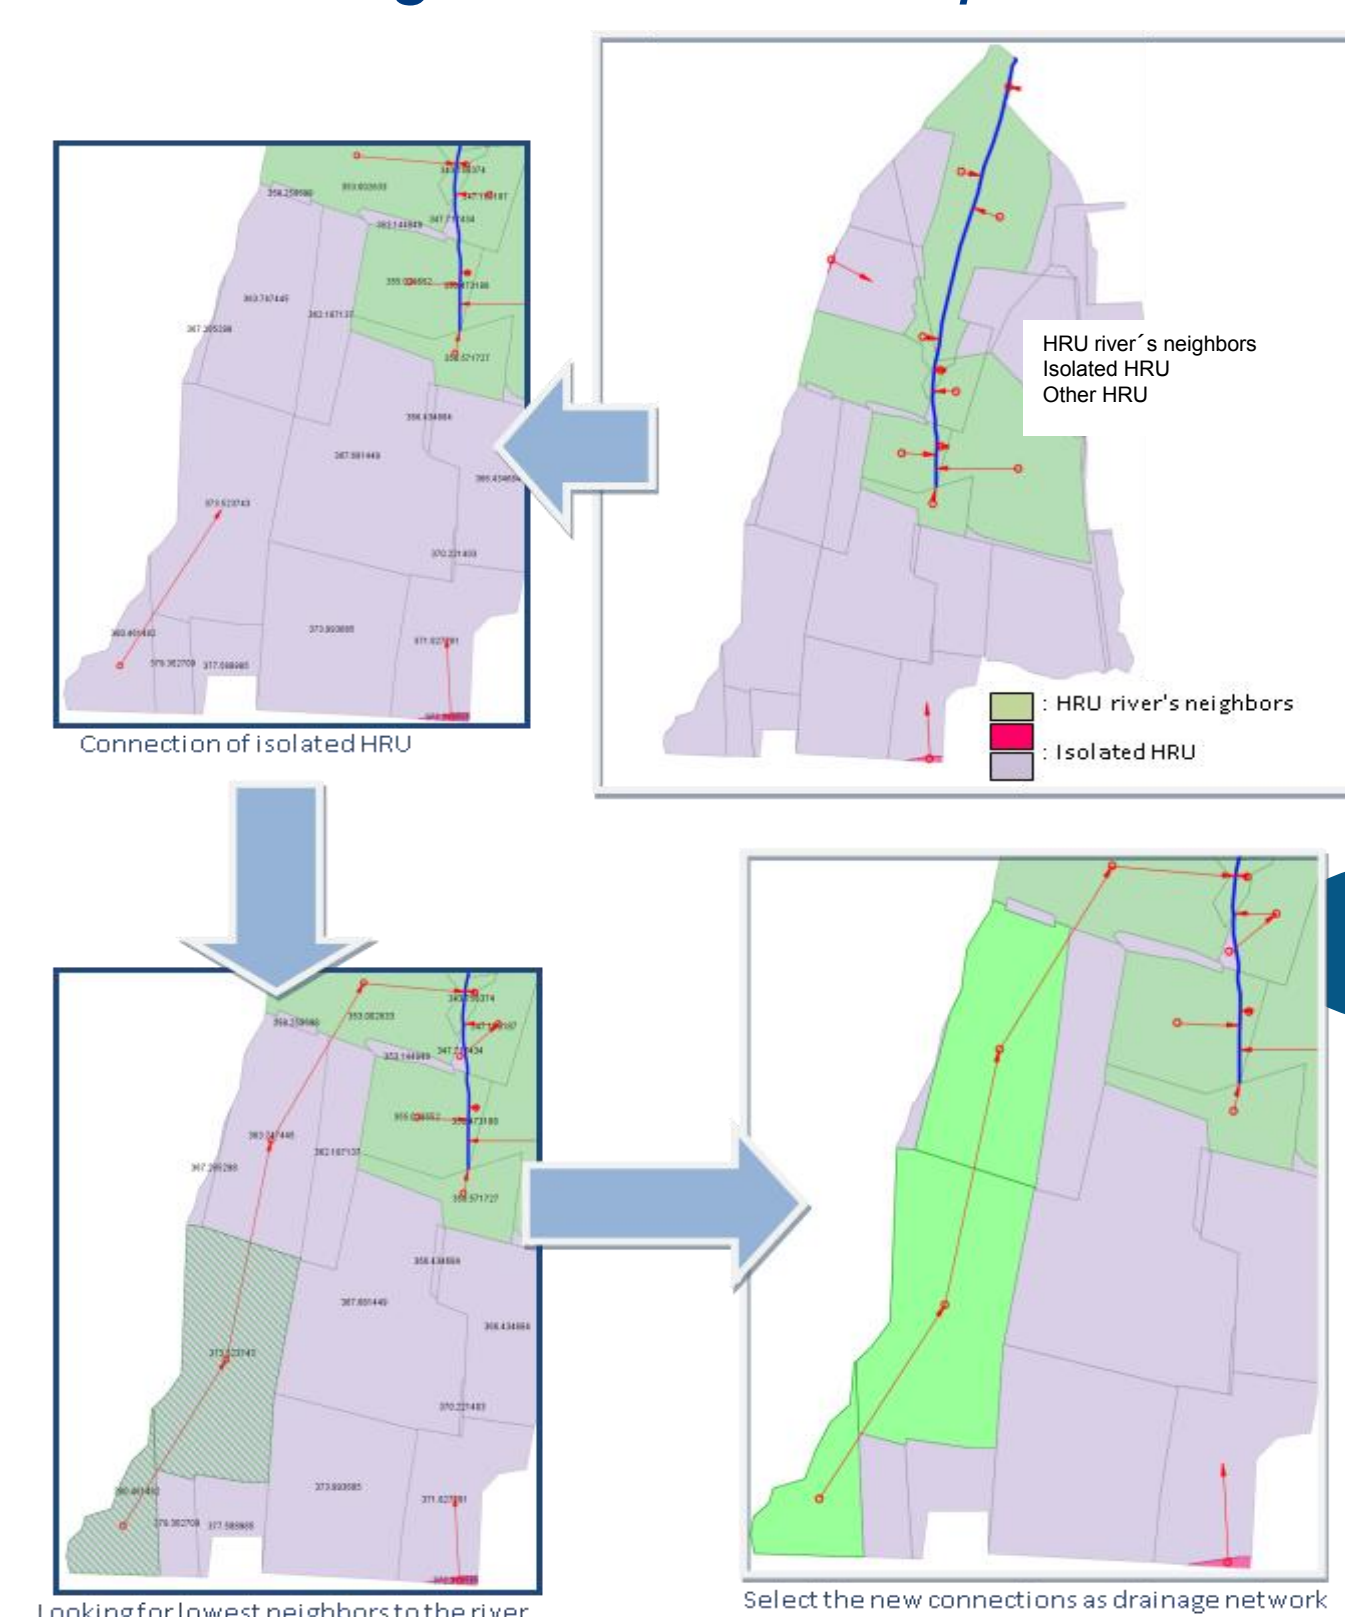

### Acknowledgements:

This work was developed within the framework of Project MAPA (IDRC 107081-001) and Project ECOS-CONICITY C14U02. We would also like to thank IRSTEA-Lyon for their financing, as well as the contribution of Projects FONDECYT N°1131131 and CEDEUS (FONDAP 15110020).

## 4 Results

Sensitivity of the drainage network to various options in GEO-PUMMA (Figure 7); illustration for the El Guindo catchment

Three meshes presented:

- the recommended mesh defined in section 3 (2057 HRUs).
- The initial mesh (without applying STEP B3 on HRUs) (2016 HRUs)
- a reference mesh (with high values of geometric criteria) and large number of elements (3749 HRUs)

Figure 7, Initial, Reference and Recommended Mesh for El Guindo (a). Drainage Network from Initial (b), Recommended (c) and Reference (d) Mesh for Mercier.

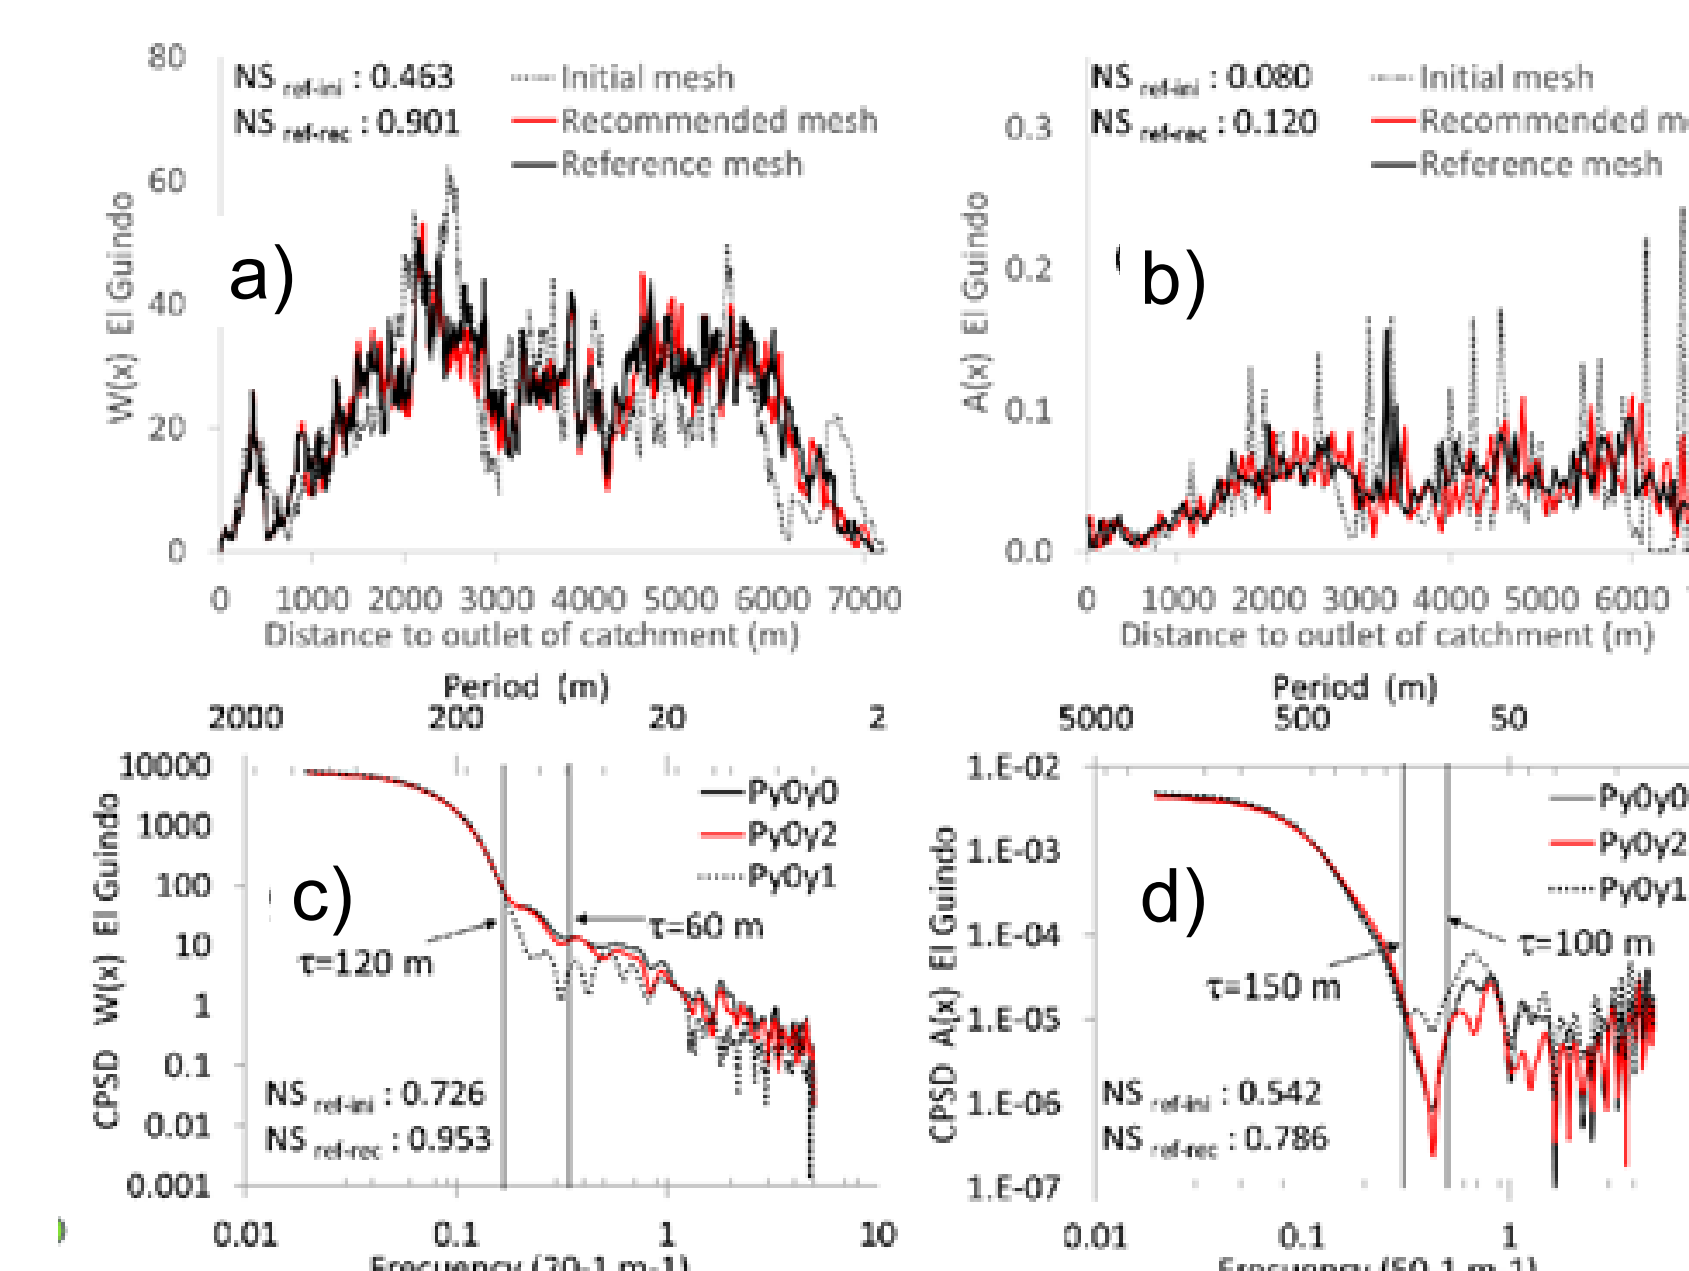
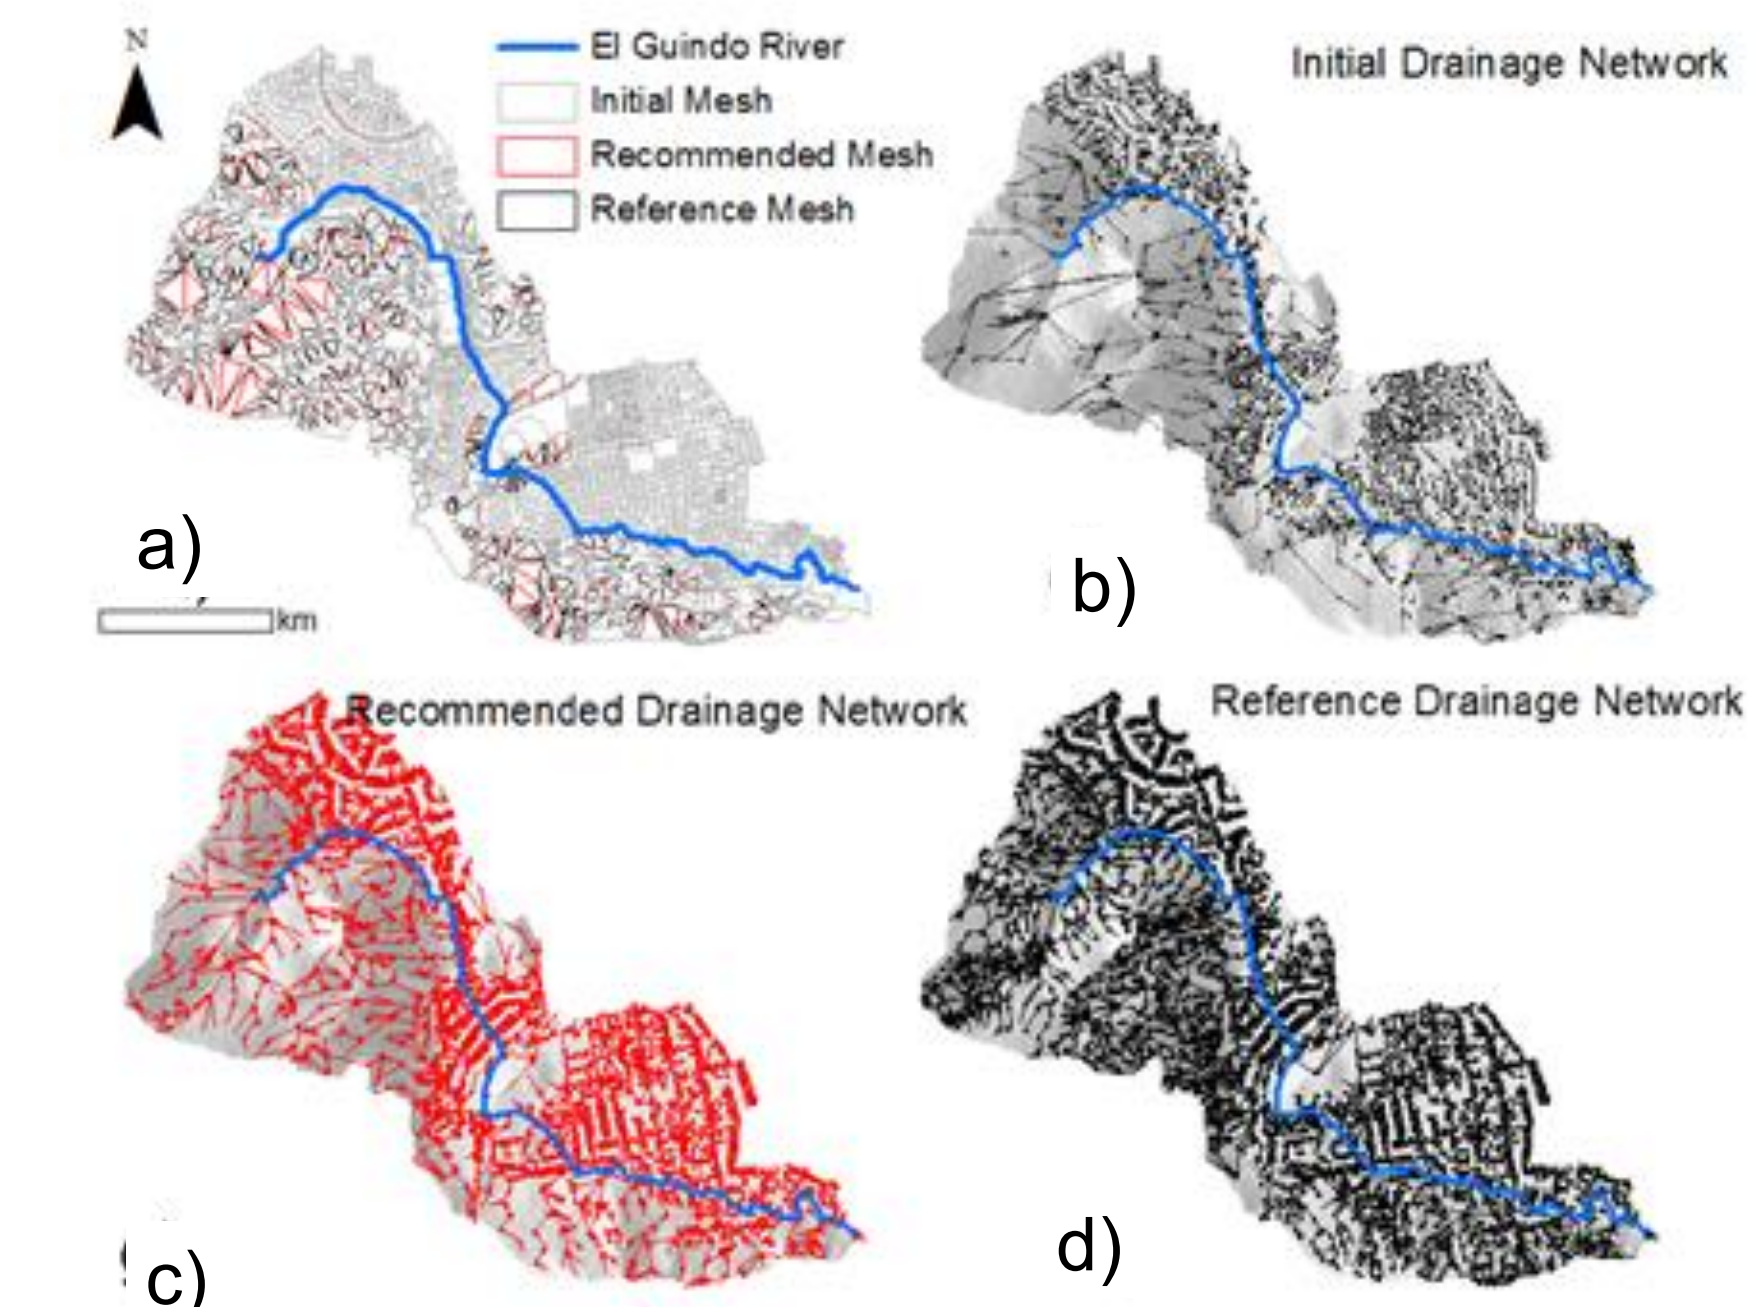


Figure 8, (a) Width-Function,  $W(x)$ , and (b) Area-Function,  $A(x)$ , of three meshes of El Guindo. In both drainage networks came from initial mesh (segmented gray line), recommended mesh (red) and reference (black). (c) CPSD of Width-Function and (d) CPSD of Area-Function of El Guindo. In both cases, comparing reference vs reference (Py0y0, black line), reference vs initial (Py0y1, gray segmented line) and reference vs recommended (Py0y2, red line).

**Illustration of the improvement led by the GEO-PUMMA vectorial approach, as compared to standard raster approaches** (HRU\_Delin derived from Grass-HRU, Schwartz, 2008)

- Necessity to use high resolution (2 m cell size and minimum area threshold of 10 m<sup>2</sup>) with the raster approach.
- Large number of HRUs (more than 30,000 units) as compared to about 2400 for GEO-PUMMA
- But some land use features such as streets and irregular boundaries between lots are lost. (Figure 9)

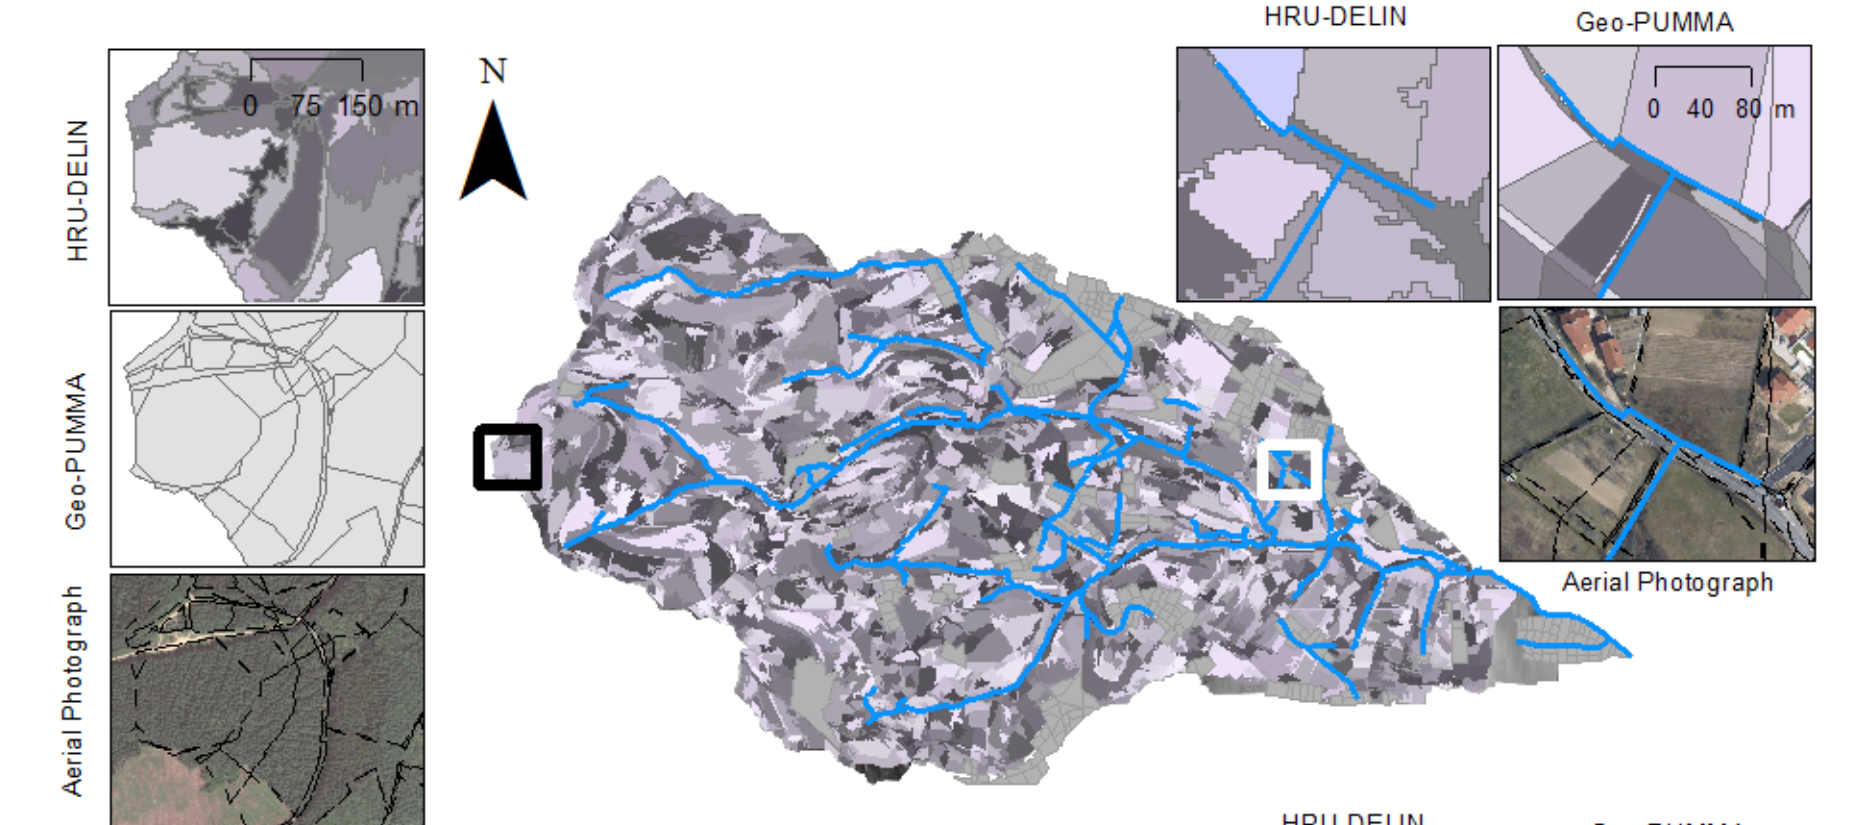


Figure 9. Middle: HRU generation by HRU-DELIN (raster approach). Zooms comparing HRU-DELIN (raster) and Geo-PUMMA (vectorial approach)

## 5 Conclusions

- Geo-PUMMA** was successfully tested in the Mercier and El Guindo catchment.
- This toolbox **allows getting the drainage network** from a polygonal mesh, with a novel approach that extracts the hydrological connectivity from a terrain represented only by HRUs and UHEs elements, considering hydraulic infrastructures present in the urban and peri-urban catchment.
- Hydraulics features are **not limited by a cell size**.
- The **recommended mesh** allows preserving the physiographic units and improving the drainage representation **without increasing** significantly the final number of elements.