



HAL
open science

Steady state analysis of a syntrophic model: the effect of a new input substrate concentration

Yessmine Daoud, Nahla Abdellatif, Tewfik Sari, Jérôme Harmand

► To cite this version:

Yessmine Daoud, Nahla Abdellatif, Tewfik Sari, Jérôme Harmand. Steady state analysis of a syntrophic model: the effect of a new input substrate concentration. *Mathematical Modelling of Natural Phenomena*, 2018, 13 (3), pp.21. 10.1051/mmnp/2018037 . hal-02608022

HAL Id: hal-02608022

<https://hal.inrae.fr/hal-02608022>

Submitted on 16 May 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Copyright

STEADY STATE ANALYSIS OF A SYNTROPHIC MODEL: THE EFFECT OF A NEW INPUT SUBSTRATE CONCENTRATION

Y. DAOUD^{1,2,*}, N. ABDELLATIF^{1,5}, T. SARI^{3,6} AND J. HARMAND⁴

Abstract. In this work, we are interested in a reduced and simplified model of the anaerobic digestion process. We focus on the acetogenesis and hydrogenotrophic methanogenesis phases. The model describes a syntrophic relationship between two microbial species (the acetogenic bacteria and the hydrogenotrophic methanogenic bacteria) with two input substrates (the fatty acids and the hydrogen) including both decay terms and inhibition of the acetogenic bacteria growth by an excess of hydrogen in the system. The existence and stability analysis of the steady states of the model points out the existence of a new equilibrium point which can be stable according to the operating parameters of the system. By means of operating diagrams, we show that, whatever the region of space considered, there exists only one locally exponentially stable steady state.

Mathematics Subject Classification. 34D20, 92D25, 92C45

Accepted March 9, 2018.

1. INTRODUCTION

The anaerobic digestion (AD) is a natural process in which organic material is converted into biogas in an environment without oxygen by the action of a microbial ecosystem. It is used for the treatment of waste or wastewater and has the advantage of producing methane or hydrogen under appropriate conditions. Thus, it has a high potential within the actual context of green energy development. However, its management is not easy because a number of intermediate metabolites may accumulate and lead to the destabilization of the biological reactions. To better understand and control this process, many models have been reported in the literature, *cf.* [1–4, 6, 8, 10, 11]. In particular, a key biological step has been described as the syntrophic relationship between acid consumers (which produce hydrogen) and hydrogen consumer (which produce methane). Indeed, in degrading the hydrogen – which is inhibiting microbial growth rate – methanogens allow their coexistence with acid producers: this fragile equilibrium has been thoroughly studied in the past years. In [11], a model of such a syntrophic relationship is studied. As underlined in this paper, for thermodynamic reasons propionate degradation is extremely sensitive to accumulation of hydrogen. Thus in

Keywords and phrases: Microbial ecosystems, syntrophic relationship, mortality, stability, operating diagrams.

¹ Université de Tunis El Manar, École Nationale d'Ingénieurs de Tunis, LAMSIN, BP 37, Le Belvédère, 1002 Tunis, Tunisie.

² UMR Mistea, INRA, Université de Montpellier, 34060 Montpellier, France.

³ UMR Itap, Irstea, Université de Montpellier, 34196 Montpellier, France.

⁴ LBE, INRA, Université de Montpellier, 11100 Narbonne, France.

⁵ Université de Manouba, ENSI, Campus Universitaire de Manouba, 2010 Manouba, Tunisie.

⁶ Université de Haute Alsace, LMIA, 4 rue des frères Lumière, 68093 Mulhouse, France.

* Corresponding author: daoud_yessmine@yahoo.fr

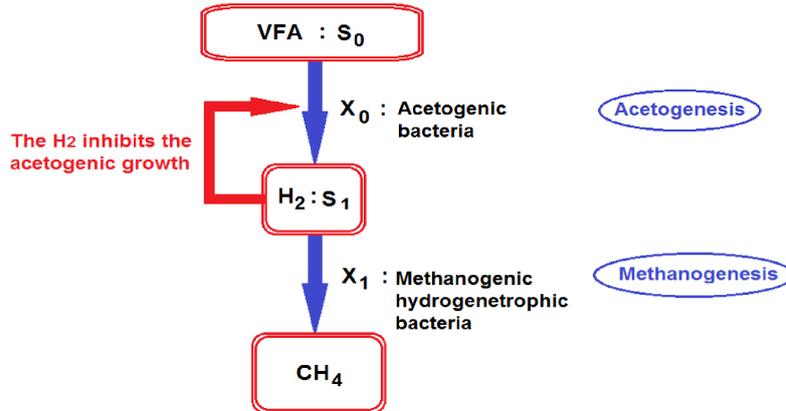


FIGURE 1. The acetogenesis and the hydrogenotrophic methanogenesis phases: the fatty acids produced by the previous phase (the acidogenesis) are consumed by the acetogenic bacteria to produce the hydrogen, which is converted by the hydrogenotrophic methanogenic bacteria into methane. An excess of hydrogen in the system can inhibit the acetogenic bacteria growth.

methanogenic ecosystems propionate degradation is only sustainable in the presence of hydrogenotrophic organisms. To study the syntrophy, the authors have considered a system involving precisely propionate degraders and hydrogenotrophic methanogens. The substrate/product variables are the propionate and the hydrogen (*cf.* Fig. 1).

Using realistic parameters values for this two-step model, Xu *et al.* (*cf.* [11]) have shown that the introduction of maintenance terms (equivalent to mortality terms in their study) does not destabilize the positive equilibrium of the system. This result has been made generic by Sari and Harmand (*cf.* [5]) in the sense they have shown that for a large class of kinetics and whatever the model parameters values, the stability of the equilibrium is maintained. However, in these studies, only one substrate input – the input substrate concentration in propionate – was considered. In reality, some hydrogen is produced by other reactions taking place in parallel of the main reactions considered in the model under interest. Thus, to deal with a more realistic situation, we incorporate the input substrate concentration in hydrogen in the model. The aim of this study is to give a comprehensive analysis of the extended model of [5]. We describe all steady states of the model and their stability. We prove, in particular, that the existence of the steady state, corresponding to the washout of acetogenic bacteria, is possible for certain values of the operating parameters and we give necessary and sufficient conditions for its stability. To describe the qualitative behavior of the system, we determine the operating diagram of the model according to the the operating parameters. The operating diagrams can be useful to interpret experimental results. With respect to purely commensalistic systems described by [7], our model is different because of the dependence of the growth rate of microorganisms of the first step by the product of the reaction. With respect to more general models as those considered in [2] or [6], it differs in that it includes mortality terms while the latter do not.

The paper is organized as follows. In Section 2, we present the two-step model with two input substrate concentrations and we give a preliminary result on the positivity and the boundedness of the solution under general hypotheses on the growth functions. In Section 3, we give the description of the steady states and in section 4, we discuss their stability. In Section 5, we illustrate the effect of the second input substrate concentration, in designing the operating diagrams, first, with respect to the first input substrate concentration and the dilution rate and second, with respect to the second input substrate concentration and the dilution rate. In Section 6, numerical simulations with realistic growth functions are presented to illustrate our results in different cases. The technical proofs of the results are given in the Appendix A.

2. THE MODEL

The two-step model reads:

$$\begin{cases} \frac{ds_0}{dt} = D(s_0^{in} - s_0) - \mu_0(s_0, s_1)x_0, \\ \frac{dx_0}{dt} = -Dx_0 + \mu_0(s_0, s_1)x_0 - a_0x_0, \\ \frac{ds_1}{dt} = D(s_1^{in} - s_1) + \mu_0(s_0, s_1)x_0 - \mu_1(s_1)x_1, \\ \frac{dx_1}{dt} = -Dx_1 + \mu_1(s_1)x_1 - a_1x_1, \end{cases} \quad (2.1)$$

where s_0 and s_1 are the concentration substrates (the fatty acid and the hydrogen, respectively), introduced in the chemostat with input concentrations s_0^{in} and s_1^{in} . D is the dilution rate, x_0 and x_1 are the acetogenic bacteria and hydrogenotrophic methanogenic bacteria concentrations. This model includes the maintenance (or decay) terms a_0x_0 and a_1x_1 , where a_0 and a_1 are positive parameters. The functions $\mu_0(.,.)$ and $\mu_1(.)$ are the specific growth rate of the bacteria.

The terms $\mu_0(s_0, s_1)x_0$ and $\mu_1(s_1)x_1$ in the first and third equations represent the consumption of substrates s_0 and s_1 by the biomasses x_0 and x_1 , respectively. These terms in the second and fourth equations represent the growth of the biomasses x_0 and x_1 , respectively. The variables have been rescaled such that all the constant parameters were fixed to 1, see [5] for the details.

We assume that the functions $\mu_0(.,.)$ and $\mu_1(.)$ satisfy:

H1 For all $s_0 > 0$ and $s_1 \geq 0$, $\mu_0(s_0, s_1) > 0$, $\mu_0(0, s_1) = 0$ and $\sup_{s_0 \geq 0} \mu_0(s_0, s_1) < +\infty$.

H2 For all $s_1 > 0$, $\mu_1(s_1) > 0$, $\mu_1(0) = 0$ and $m_1 := \sup_{s_1 \geq 0} \mu_1(s_1) < +\infty$.

H3 For all $s_0 > 0$ and $s_1 > 0$, $\frac{\partial \mu_0}{\partial s_0}(s_0, s_1) > 0$ and $\frac{\partial \mu_0}{\partial s_1}(s_0, s_1) < 0$.

H4 For all $s_1 > 0$, $\frac{d\mu_1}{ds_1}(s_1) > 0$.

For s_1 fixed, we denote:

$$m_0(s_1) = \sup_{s_0 \geq 0} \mu_0(s_0, s_1).$$

We assume that:

H5 For all $s_1 > 0$, $\frac{dm_0}{ds_1} < 0$.

Hypothesis **H1** means that no growth can take place for species x_0 without the substrate s_0 . Hypothesis **H2** means that the intermediate product s_1 is necessary for the growth of species x_1 . Hypothesis **H3** means that the growth rate of species x_0 increases with the substrate s_0 but it is self-inhibited by the intermediate product s_1 . Hypothesis **H4** means that the growth of species x_1 increases with intermediate product s_1 produced by species x_0 . Note that this defines a syntrophic relationship between the two species. Hypothesis **H5** means that the maximal growth rate of species x_0 decreases with the substrate s_1 .

We first state the following result:

Proposition 2.1. *For every non-negative initial condition, the solution of (2.1) has non-negative components and is positively bounded and thus is defined for every positive t .*

The proof is given in the Appendix A.

3. STEADY STATE ANALYSIS

A steady state of (2.1) is a solution of the following nonlinear algebraic system obtained by setting the right-hand sides of (2.1) equal to zero:

$$D(s_0^{in} - s_0) - \mu_0(s_0, s_1)x_0 = 0, \quad (3.1)$$

$$-Dx_0 + \mu_0(s_0, s_1)x_0 - a_0x_0 = 0, \quad (3.2)$$

$$D(s_1^{in} - s_1) + \mu_0(s_0, s_1)x_0 - \mu_1(s_1)x_1 = 0, \quad (3.3)$$

$$-Dx_1 + \mu_1(s_1)x_1 - a_1x_1 = 0, \quad (3.4)$$

Since all state variables are concentrations, steady state $E = (s_0, x_0, s_1, x_1)$ exists if and only if all its components are non-negative. From equation (3.2) we deduce that:

$$x_0 = 0 \quad \text{or} \quad \mu_0(s_0, s_1) = D + a_0,$$

and from equation (3.4) we deduce that:

$$x_1 = 0 \quad \text{or} \quad \mu_1(s_1) = D + a_1.$$

We obtain the four equilibria:

SS0: $x_0 = 0, x_1 = 0$, where both species are washed out.

SS1: $x_0 > 0, x_1 = 0$, where species x_1 is washed out while x_0 survives.

SS2: $x_0 > 0, x_1 > 0$, where both species survive.

SS3: $x_0 = 0, x_1 > 0$, where species x_0 is washed out while x_1 survives.

For the description of the steady states, we need the following notations. Since the function $s_1 \mapsto \mu_1(s_1)$ is increasing, it has an inverse function $y \mapsto M_1(y)$, so that, for all $s_1 \geq 0$ and $y \in [0, m_1[$

$$s_1 = M_1(y) \iff y = \mu_1(s_1).$$

Let s_1 be fixed. Since the function $s_0 \mapsto \mu_0(s_0, s_1)$ is increasing, it has an inverse function $y \mapsto M_0(y, s_1)$, so that, for all $s_0, s_1 \geq 0$, and $y \in [0, m_0(s_1)[$

$$s_0 = M_0(y, s_1) \iff y = \mu_0(s_0, s_1).$$

Then, we have the following result.

Proposition 3.1. *Using assumptions H1–H4, we have:*

- For all $y \in [0, m_0(s_1)[$ and $s_1 \geq 0$, $\frac{\partial M_0}{\partial y}(y, s_1) > 0$ and $\frac{\partial M_0}{\partial s_1}(y, s_1) > 0$.
- For all $y \in [0, m_1[$, $\frac{dM_1}{dy}(y) > 0$.

The proof is given in the Appendix A. Thus, we can prove the following proposition:

Proposition 3.2. *Assume that assumptions H1–H4 hold. Then, (2.1) has at most four steady states:*

- SS0 = $(s_0^{in}, 0, s_1^{in}, 0)$. It always exists.
- SS1 = $(s_{01}, x_{01}, s_{11}, 0)$, where s_{01} is the solution of the equation: $\mu_0(s_{01}, (s_0^{in} + s_1^{in}) - s_{01}) = D + a_0$.
 $x_{01} = \frac{D}{D+a_0}(s_0^{in} - s_{01})$ and $s_{11} = (s_0^{in} + s_1^{in}) - s_{01}$.
 It exists if and only if $s_0^{in} > M_0(D + a_0, s_1^{in})$.

- $SS2 = (s_{02}, x_{02}, s_{12}, x_{12})$, where $s_{02} = M_0(D + a_0, M_1(D + a_1))$, $x_{02} = \frac{D}{D+a_0}(s_0^{in} - s_{02})$, $s_{12} = M_1(D + a_1)$ and $x_{12} = \frac{D}{D+a_1}((s_0^{in} + s_1^{in}) - s_{02} - s_{12})$.
It exists if and only if $s_0^{in} > M_0(D + a_0, M_1(D + a_1))$ and $s_0^{in} + s_1^{in} > M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1)$.
- $SS3 = (s_0^{in}, 0, M_1(D + a_1), \frac{D}{D+a_1}(s_1^{in} - M_1(D + a_1)))$. It exists if and only if $s_1^{in} > M_1(D + a_1)$.

The proof is given in the Appendix A. With respect to [5], a new steady state SS3 exists. Notice that, if $s_1^{in} = 0$ the condition $\mu_1(s_1^{in}) > a_1$ is not satisfied and SS3 does not exist. In the next section, we analyse local stability of the steady states.

4. STABILITY ANALYSIS

The stability of the steady states is given by the sign of the real part of eigenvalues of the Jacobian matrix or by the Routh–Hurwitz criteria (in the case of $SS2$). In the following, we use the abbreviations LES for locally exponentially stable.

Proposition 4.1. *Assume that assumptions H1–H4 hold. Then, the local stability of steady states of (2.1) is given by:*

- $SS0$ is LES if and only if $s_1^{in} < M_1(D + a_1)$ and $s_0^{in} < M_0(D + a_0, s_1^{in})$.
- $SS1$ is LES if and only if $s_0^{in} + s_1^{in} < M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1)$.
- $SS2$ is LES if it exists.
- $SS3$ is LES if and only if $s_0^{in} < M_0(D + a_0, M_1(D + a_1))$.

The proof is given in the Appendix A. The results of Propositions 3.2 and 4.1 are summarized in Table 1 where the functions F_i , $i = 0, 1, 2$, are defined by:

$$\begin{aligned} F_0(D) &= M_0(D + a_0, s_1^{in}), \\ F_1(D) &= M_1(D + a_1) + M_0(D + a_0, M_1(D + a_1)), \\ F_2(D) &= M_0(D + a_0, M_1(D + a_1)). \end{aligned} \tag{4.1}$$

The domains of definition of the functions F_i , for $i = 0, 1$ and 2, are given in Proposition 4.2. Notice that:

$$s_1^{in} < M_1(D + a_1) \iff D > \mu_1(s_1^{in}) - a_1.$$

Proposition 4.2. *We have:*

- F_0 is defined in $[0, D_0[$, with $D_0 = m_0(s_1^{in}) - a_0$. This interval is not empty if and only if $a_0 < m_0(s_1^{in})$.
- F_1 is defined in $[0, D_1[$, with $D_1 = \min(m_1 - a_1, D_2)$ with D_2 is the positive solution of equation $D + a_0 = m_0(M_1(D + a_1))$. $[0, D_1[$ is not empty if and only if $a_1 < m_1$ and $a_0 < m_0(M_1(a_1))$.
- F_2 is defined in $[0, D_2[$, D_2 exists if and only if $a_0 < m_0(M_1(a_1))$.

The proof is given in the Appendix A.

5. OPERATING DIAGRAMS

The operating diagrams show how the system behaves when we vary the three operating parameters s_0^{in} , s_1^{in} and D .

These diagrams are specially useful for the operators, to estimate in particular, for a given a triplet s_0^{in} , s_1^{in} and D , the margin of stability they have, with respect to a region of the space where the washing out of at least one biomass is stable. For a planar operating diagram, we must fix one of the three operating parameters D , s_0^{in} or s_1^{in} . In Section 5.1, we fix s_1^{in} and we determine the operating diagrams in the plane (s_0^{in}, D) and, in Section 5.2, we give the operating diagrams in the plane (s_1^{in}, D) with s_0^{in} fixed.

TABLE 1. Existence and local stability of steady states.

Steady state	Existence condition	Stability condition
SS0	Always exists	$s_0^{in} < F_0(D)$ and $D > \mu_1(s_1^{in}) - a_1$
SS1	$s_0^{in} > F_0(D)$	$s_0^{in} + s_1^{in} < F_1(D)$
SS2	$s_0^{in} + s_1^{in} > F_1(D)$ and $s_0^{in} > F_2(D)$	Stable when it exists
SS3	$\mu_1(s_1^{in}) > a_1$ and $D < \mu_1(s_1^{in}) - a_1$	$s_0^{in} < F_2(D)$

TABLE 2. The cases $\mu_1(s_1^{in}) < a_1$.

Condition	Region	SS0	SS1	SS2
$F_0(D) < s_0^{in} < F_1(D) - s_1^{in}$	$(s_0^{in}, D) \in R^1$	U	S	
$s_0^{in} < F_0(D)$	$(s_0^{in}, D) \in R^2$	S		
$F_1(D) - s_1^{in} < s_0^{in}$	$(s_0^{in}, D) \in R^6$	U	U	S

TABLE 3. The cases $\mu_1(s_1^{in}) > a_1$.

	Condition	Region	SS0	SS1	SS2	SS3
$D > \bar{D}$	$F_0(D) < s_0^{in} < F_1(D) - s_1^{in}$	$(s_0^{in}, D) \in R^1$	U	S		
	$s_0^{in} < F_0(D)$	$(s_0^{in}, D) \in R^2$	S			
	$F_1(D) - s_1^{in} < s_0^{in}$	$(s_0^{in}, D) \in R^6$	U	U	S	
$D < \bar{D}$	$s_0^{in} < F_2(D)$	$(s_0^{in}, D) \in R^3$	U			S
	$F_2(D) < s_0^{in} < F_0(D)$	$(s_0^{in}, D) \in R^4$	U		S	U
	$s_0^{in} > F_0(D)$	$(s_0^{in}, D) \in R^5$	U	U	S	U

5.1. Operating diagram with respect to (s_0^{in}, D) and s_1^{in} fixed

In a first step, we fix s_1^{in} and we illustrate the equilibria existence and stability domains in the plane (s_0^{in}, D) . Let $F_0(D)$, $F_1(D)$ and $F_2(D)$ be the functions defined by (4.1). We define the curve γ_0 of equation $s_0^{in} = F_0(D)$, the curve γ_1 of equation $s_0^{in} = F_1(D) - s_1^{in}$ and the curve γ_2 of equation $s_0^{in} = F_2(D)$. We denote $\bar{D} = \mu_1(s_1^{in}) - a_1$, see Table 1.

These curves with the line $D = \bar{D}$ separate the operating plane (s_0^{in}, D) in at most six regions as shown in Figure 3, labelled R^1, \dots, R^6 .

The results of Proposition 4.1 are summarized in the next theorem which shows the existence and local stability of the steady states SS0, \dots , SS3 in the regions R^1, \dots, R^6 of the operating diagram, for a given s_1^{in} . The regions R^i , $i = 1, \dots, 6$ of operating diagram are colored by four different colors. Each color corresponds to one and only one stable steady-state: in the region R^4 , R^5 and R^6 , SS2 exists and is stable. In R^5 , all the other steady states exist but are unstable. In the region R^4 , (respectively R^6), the steady-state SS1 (respectively SS3) does not exist and the other steady-states exist. Therefore these regions are all colored in the same yellow color. Similarly the region R^2 (in green) is the stability region of the washout steady-state SS0, the region R^1 (in blue) is the stability region of steady-state SS1 and R^3 (in purple) is the stability region of steady state SS3. It is useful to state the next properties on the functions F_i , $i = 0, 1, 2$.

Lemma 5.1. *We have*

- If $\mu_1(s_1^{in}) < a_1$ then $F_0(D) < F_1(D) - s_1^{in}$.
- If $\mu_1(s_1^{in}) > a_1$ and $D > \mu_1(s_1^{in}) - a_1$ then $F_0(D) < F_1(D) - s_1^{in}$.
- If $\mu_1(s_1^{in}) > a_1$ and $D < \mu_1(s_1^{in}) - a_1$ then $F_2(D) < F_0(D)$.

TABLE 4. Existence and local stability of steady states, according to s_1^{in} .

Steady state	Existence condition	Stability condition
SS0	Always exists	$s_1^{in} > F_3(D)$ and $s_1^{in} < F_1(D) - F_2(D)$
SS1	$\bar{D}_3 > 0$ and $s_1^{in} < F_3(D)$	$s_1^{in} < F_1(D) - s_0^{in}$
SS2	$s_1^{in} > F_1(D) - s_0^{in}$, $\bar{D}_1 > 0$ and $D < \bar{D}_1$	Stable when it exists
SS3	$s_1^{in} > F_1(D) - F_2(D)$	$D > \bar{D}_1$

 TABLE 5. The cases $\bar{D}_1 < 0$, $\bar{D}_3 < 0$ and $0 < D < \bar{D}_2$.

Condition	Region	SS0	SS3
$s_1^{in} < F_1(D) - F_2(D)$	$(s_1^{in}, D) \in R^2$	S	
$F_1(D) - F_2(D) < s_1^{in}$	$(s_1^{in}, D) \in R^3$	U	S

 TABLE 6. The cases $\bar{D}_1 < 0$, $\bar{D}_3 > 0$ and $0 < D < \bar{D}_2$.

Condition	Region	SS0	SS1	SS3
$s_1^{in} < F_3(D)$	$(s_1^{in}, D) \in R_1^1$	U	S	
$F_3(D) < s_1^{in} < F_1(D) - F_2(D)$	$(s_1^{in}, D) \in R^2$	S		
$F_1(D) - F_2(D) < s_1^{in}$	$(s_1^{in}, D) \in R^3$	U		S

 TABLE 7. The cases $\bar{D}_1 > 0$, $\bar{D}_3 > 0$ and $0 < D < \bar{D}_2$.

	Conditions	Region	SS0	SS1	SS2	SS3
$\bar{D}_1 < D$	$s_1^{in} < F_3(D)$	$(s_1^{in}, D) \in R_1^1$	U	S		
	$F_3(D) < s_1^{in} < F_1(D) - F_2(D)$	$(s_1^{in}, D) \in R^2$	S			
	$F_1(D) - F_2(D) < s_1^{in}$	$(s_1^{in}, D) \in R^3$	U			S
$D < \bar{D}_1$	$F_3(D) < s_1^{in}$	$(s_1^{in}, D) \in R^4$	U		S	U
	$F_1(D) - F_2(D) < s_1^{in} < F_3(D)$	$(s_1^{in}, D) \in R^5$	U	U	S	U
	$F_1(D) - s_0^{in} < s_1^{in} < F_1(D) - F_2(D)$	$(s_1^{in}, D) \in R^6$	U	U	S	
	$s_1^{in} < F_1(D) - s_0^{in}$	$(s_1^{in}, D) \in R_2^1$	U	S		

For a detailed proof, see the Appendix A. We can now state the following result:

Theorem 5.2. *The existence and stability properties of the system (2.1), in the plane (s_0^{in}, D) , are summarized in the following tables:*

The letter S (resp. U) means that the corresponding equilibrium is LES (resp. unstable). The absence of letter means that the equilibrium does not exist.

The proof is given in the Appendix A.

These results are essentially the same as those presented in Table 1. Notice that Table 2 is identical to the Table 2 of [5], it corresponds to the case where the concentration s_1^{in} is small or equal to zero. Table 3 emerges due to the presence of s_1^{in} : three regions – where SS3 exists – appear. Moreover, in the regions R^i , $i = 1, \dots, 6$, there is only one stable steady state and all other equilibria are unstable or not even exist.

TABLE 8. Nominal parameters values for a syntrophic model of degradation of fatty acids and hydrogen by the acetogenic bacteria and methanogenic hydrogenotrophic bacteria, respectively.

Parameters	Units	Nominal values
m_0	d^{-1}	0.52
K_0	$kg\ COD/m^3$	0.124
m_1	d^{-1}	2.10
K_1	$kg\ COD/m^3$	0.25
K_i	$kg\ COD/m^3$	0.035
a_0	d^{-1}	0.02
a_1	d^{-1}	0.02

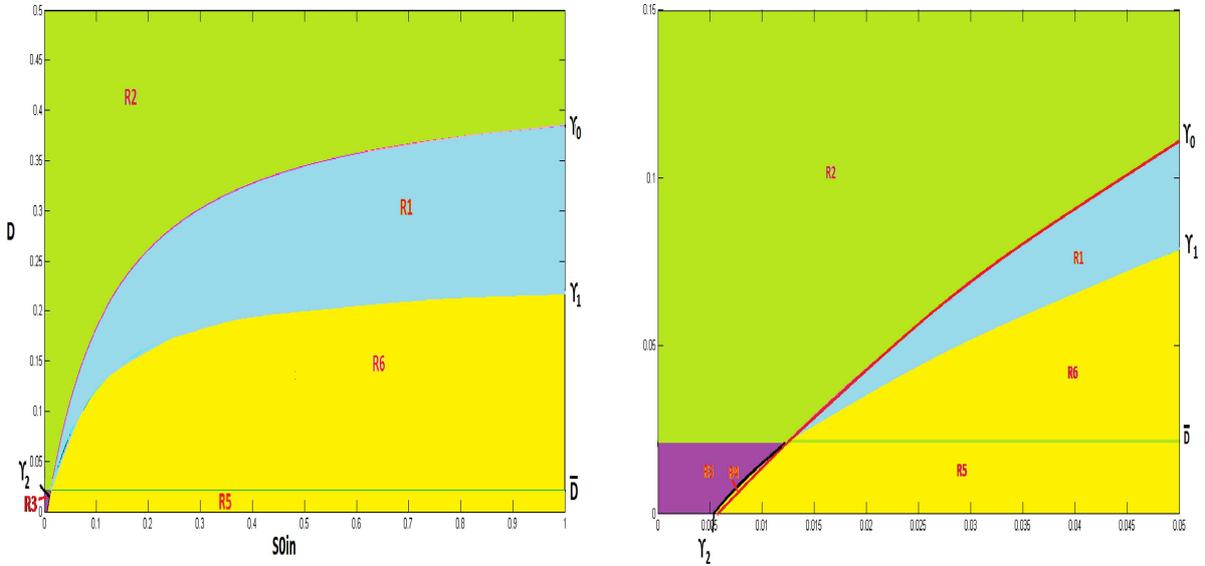


FIGURE 2. Operating diagram of the model (2.1) for $s_1^{in} = 0.005\ KgCODm^{-3}$ and $\bar{D} = 0.021\ d^{-1}$. The region R^2 (in green) is the stability region of the washout steady-state SS_0 , R^1 (in blue) is the stability region of steady-state SS_1 , R^6 , R^5 and R^4 (in yellow) are the stability region of steady-state SS_2 and the region R^3 (in purple) is the stability region of steady-state SS_3 . (the figure at right is a zoom of the bottom of the figure at left)

5.2. Operating diagram with respect to (s_1^{in}, D) and s_0^{in} fixed

Now, let s_0^{in} be fixed. Since the function $s_1 \mapsto \mu_0(s_0, s_1)$ is decreasing, it has a decreasing inverse function $z \mapsto M_2(s_0, z)$, so that, for all $s_0, s_1 \geq 0$, and $z \in [0, \sup \mu_0(s_0, \cdot)]$

$$s_1 = M_2(s_0, z) \iff z = \mu_0(s_0, s_1).$$

We define the function:

$$F_3(D) = M_2(s_0^{in}, D + a_0). \quad (5.1)$$

Let \bar{D}_1 , if it exists, be the largest solution of $F_2(D) = s_0^{in}$, and $\bar{D}_2 = \min(m_1 - a_1, D_2)$, such that F_1 is defined in $[0, \bar{D}_2]$. Let \bar{D}_3 the solution of $F_3(D) = 0$. Since F_3 is decreasing, then $\bar{D}_3 < 0$ implies that $F_3(D) < 0$.

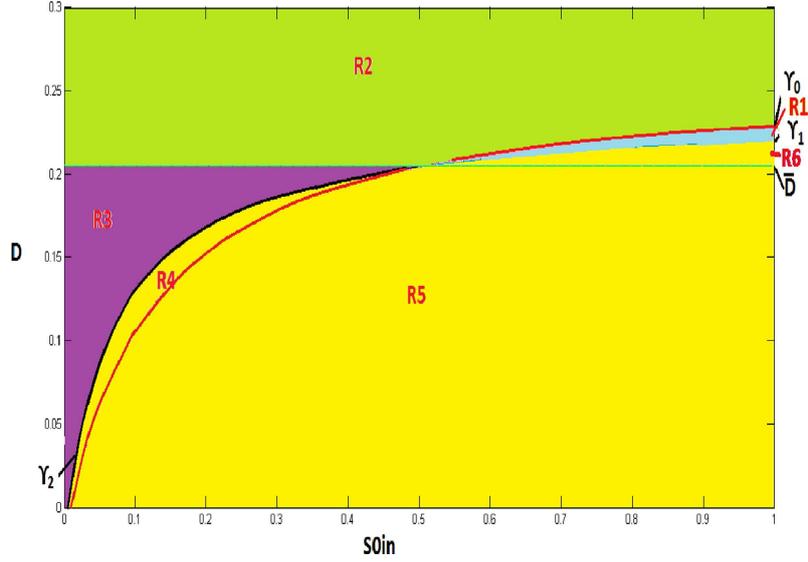


FIGURE 3. Operating diagram of the model (2.1) for $s_1^{in} = 0.03 \text{ KgCODm}^{-3}$ and $\bar{D} = 0.205 \text{ d}^{-1}$.

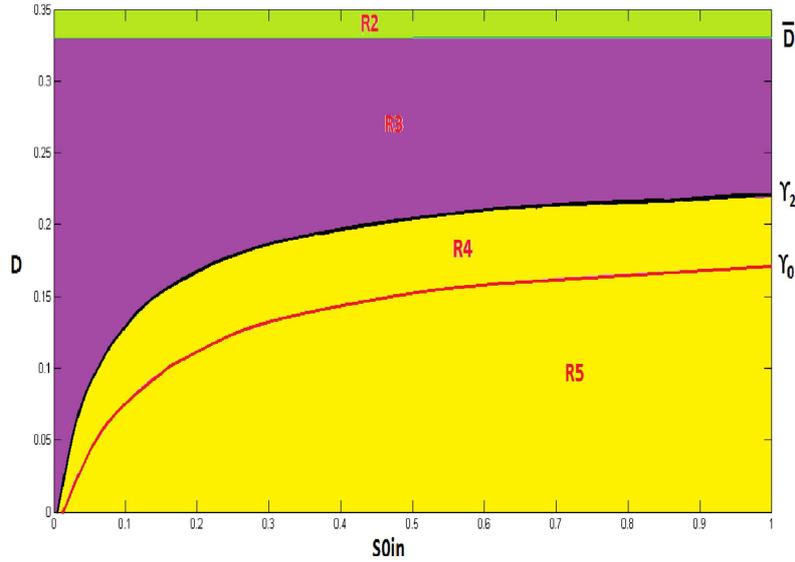


FIGURE 4. Operating diagram of the model (2.1) for $s_1^{in} = 0.05 \text{ KgCODm}^{-3}$ and $\bar{D} = 0.33 \text{ d}^{-1}$.

To illustrate the regions of existence and stability of the steady states in the plane (s_1^{in}, D) , we first express the conditions of Table 1 according to s_1^{in} , which gives the following table:

It is useful to state the next properties on the functions F_i , $i = 1, 2, 3$.

Lemma 5.3. *We assume that $\bar{D}_2 > 0$. Then, we have*

- If $D > \bar{D}_1$ then $F_3(D) < F_1(D) - F_2(D) < F_1(D) - s_0^{in}$.
- If $D < \bar{D}_1$ and $\bar{D}_1 > 0$ then $F_1(D) - s_0^{in} < F_1(D) - F_2(D) < F_3(D)$. Moreover, the three curves of functions $F_1 - F_2$, $F_1 - s_0^{in}$ and F_3 intersect at $D = \bar{D}_1$ satisfying $\bar{D}_3 > \bar{D}_1$.

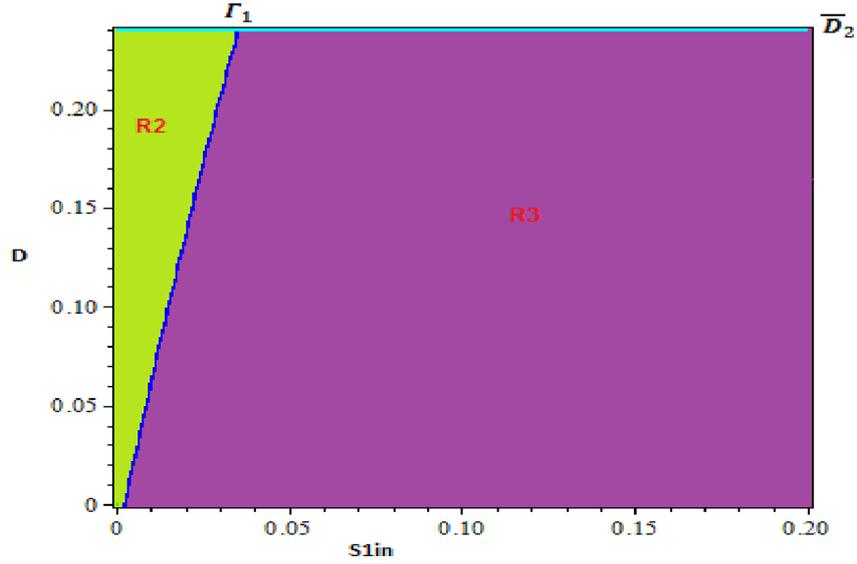


FIGURE 5. Operating diagram of the model (2.1) for $s_0^{in} = 0.005 \text{ KgCODm}^{-3}$.

For a detailed proof, see the Appendix A.

The regions R^i , $i = 1, \dots, 6$ appear in the plane (s_1^{in}, D) as the regions delimited by the following curves : Γ_0 is the curve of the function $s_1^{in} = F_1(D) - s_0^{in}$, Γ_1 is the curve of the function $s_1^{in} = F_1(D) - F_2(D)$ and Γ_2 is the curve of the function $s_1^{in} = F_3(D)$. These curves with the line $D = \bar{D}_1$ separate the operating plane (s_1^{in}, D) in at most six regions as shown in Figure 6. We notice that the region R^1 is divided into two subregions defined as follows $R^1 = R_1^1 \cup R_2^1$.

We can now state the following result:

Theorem 5.4. *The existence and stability properties of the system (2.1), in the plane (s_1^{in}, D) , are given in the following tables:*

The proof is given in the Appendix A.

6. SIMULATIONS

The stability regions of steady states are given by the operating diagram in the plane (s_0^{in}, D) in Figures 2–4, for different values of s_1^{in} . For the simulations, we use the following growth functions:

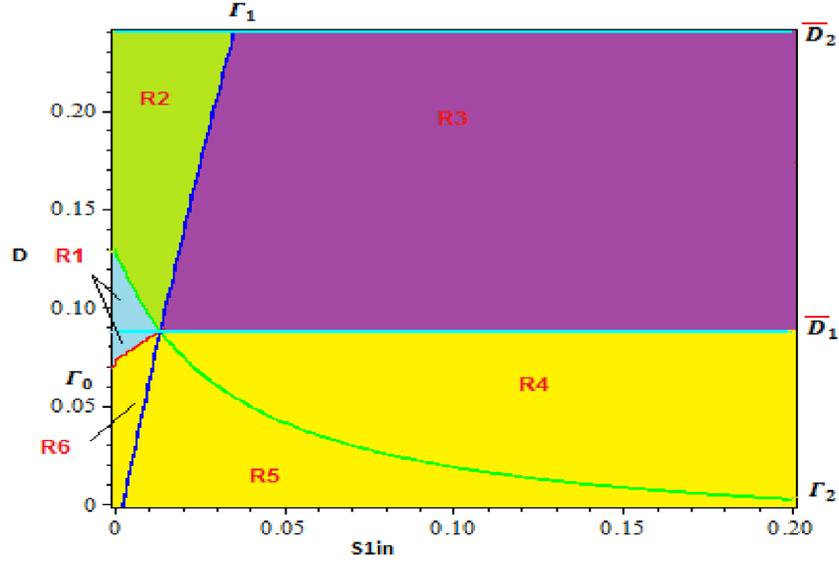
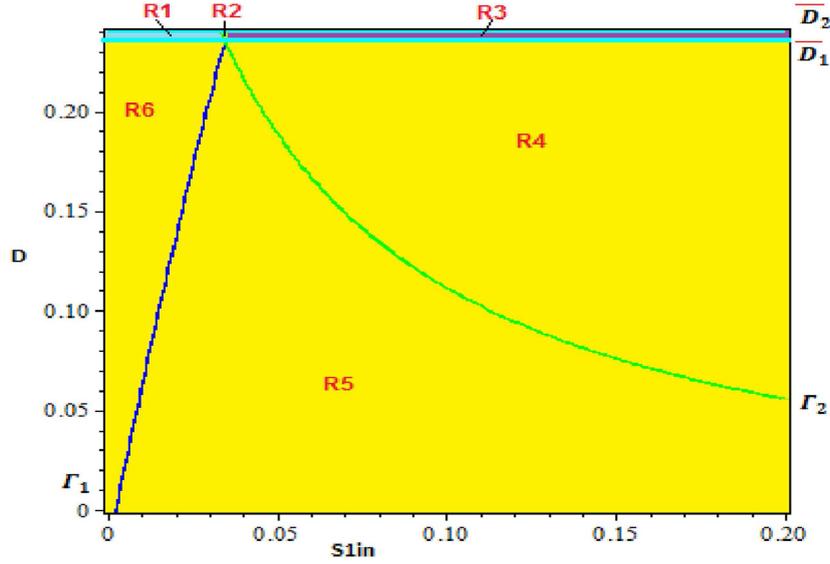
$$\mu_0(s_0, s_1) = \frac{m_0 s_0}{K_0 + s_0} \frac{1}{1 + s_1/K_i}, \quad \mu_1(s_1) = \frac{m_1 s_1}{K_1 + s_1}$$

For the operating diagrams in Figure 2, 3 and 4, we use the parameters of Table 3 of [5] and obtained from Table 1 of [11], see Table 8.

The inverse functions $M_1(\cdot)$ and $M_0(\cdot, s_1)$ of the functions $\mu_1(\cdot)$ and $\mu_0(\cdot, s_1)$ can be calculated explicitly: we have

$$y \in [0, m_1[\mapsto M_1(y) = \frac{K_1 y}{m_1 - y},$$

$$y \in \left[0, \frac{m_0}{1 + s_1/K_i}\right[\mapsto M_0(y, s_1) = \frac{K_0 y}{\frac{m_0}{1 + s_1/K_i} - y}.$$


 FIGURE 6. Operating diagram of the model (2.1) for $s_0^{in} = 0.05 \text{ KgCODm}^{-3}$.

 FIGURE 7. Operating diagram of the model (2.1) for $s_0^{in} = 5 \text{ KgCODm}^{-3}$.

The functions $F_0(D)$, $F_1(D)$ and $F_2(D)$ are given explicitly by

$$\begin{aligned}
 F_0(D) &= \frac{K_0(D + a_0)\left(1 + \frac{s_1^{in}}{K_i}\right)}{m_0 - (D + a_0)\left(1 + \frac{s_1^{in}}{K_i}\right)}, \\
 F_1(D) &= \frac{K_1(D + a_1)}{m_1 - (D + a_1)} + \frac{K_0(D + a_0)\left(1 + \frac{M_1(D + a_1)}{K_i}\right)}{m_0 - (D + a_0)\left(1 + \frac{M_1(D + a_1)}{K_i}\right)}, \\
 F_2(D) &= \frac{K_0(D + a_0)\left(1 + \frac{M_1(D + a_1)}{K_i}\right)}{m_0 - (D + a_0)\left(1 + \frac{M_1(D + a_1)}{K_i}\right)}.
 \end{aligned} \tag{6.1}$$

F_0 is defined if $D < \frac{m_0 - a_0(1 + \frac{s_1^{in}}{K_i})}{1 + \frac{s_1^{in}}{K_i}}$ and $\frac{(m_0 - a_0)K_i}{a_0} \geq s_1^{in}$.

F_1 is defined if $D < m_1 - a_1$ and $(K_i - K_1)D^2 + ((K_i - K_1)(a_0 + a_1) - K_i(m_1 + m_0))D + ((m_0 - a_0)K_i(m_1 - a_1) - a_0a_1K_1) > 0$,

F_2 is defined if $(K_i - K_1)D^2 + ((K_i - K_1)(a_0 + a_1) - K_i(m_1 + m_0))D + ((m_0 - a_0)K_i(m_1 - a_1) - a_0a_1K_1) > 0$,

that is to say if $D \in [0, \bar{D}_2[$.

Figures 2–4 illustrate the operating diagrams for increasing values of s_1^{in} . When s_1^{in} is small, namely $s_1^{in} = 0.005$, the most important regions are the regions R^i , $i = 1, 2, 6$, (see Fig. 2). These regions correspond to those obtained in the case $s_1^{in} = 0$, see (Fig. 1 of [5]). Increasing s_1^{in} leads to the emergence of the existence region of equilibrium SS3 R^i , $i = 3, 4, 5$ and to the reduction of the region R^1 and R^6 , (see Figs. 3 and 4). Thus, the input concentration of the second species leads to the emergence of a new region related to the new equilibrium SS3 and to changes in the size of the existence and stability regions of the other equilibria.

Including s_1^{in} in the model changes slightly the operating diagram of [5]. On the first side, when s_1^{in} increases, \bar{D} increases (it may be verified that $\frac{d\bar{D}}{ds_1^{in}} > 0$). The stability region of SS2 under the curve γ_2 remains the same (γ_2 does not depend to s_1^{in}). On the other side, the stability region R^3 of SS3, which corresponds to the extinction of the first species, increases in size. When the dilution value of D is small and S_{0in} large, the coexistence steady-state is stable. If D large and S_{0in} small, then washout steady-state is stable.

The stability region of steady states are given by the operating diagram in the plane (s_1^{in}, D) , see Figures 5–7, for different values of s_0^{in} . The function F_3 is given by:

$$F_3(D) = \frac{m_0K_i s_0^{in}}{(D + a_0)(K_0 + s_0^{in})} - K_i.$$

F_3 is defined if $\frac{m_0K_i s_0^{in} - a_0K_i(K_0 + s_0^{in})}{K_i(K_0 + s_0^{in})} \geq D$ and $s_0^{in} \geq \frac{a_0K_0}{m_0 - a_0}$.

When s_0^{in} increases, \bar{D}_1 increases and new regions R^4, \dots, R^6 appear under the line $D = \bar{D}_1$ and Γ_0 . This regions correspond to the stability region of the coexistence steady state SS2. $\bar{D}_2 = 0.24 d^{-1}$. It does not depend on the values of s_0^{in} . When \bar{D}_1 increases the regions R^1, R^2 and R^3 become very small, see Figure 7.

7. DISCUSSION

We have considered a model of an ecosystem involving two bacteria in a chemostat where there are two resources in the input. More precisely, we have proposed a mathematical model involving a syntrophic relationship of two bacteria. For one of the populations, one resource is needed for its growth and the other is inhibitory for the other population growth. One of the populations produces as a by-product the resource that is inhibitory to itself but needed for growth by the other population.

Extending the model studied in [5] by considering that there may have some s_{1in} in the influent and using a more general class of kinetics functions, we show that the qualitative behavior of the system can be significantly modified. We have highlighted the existence of a new equilibrium point corresponding to the washout of the first species and the existence of the second.

By using the operating diagram, we can show how the system behaves when we vary the three operating parameters s_0^{in} , s_1^{in} and D while varying the two others in given ranges. To plot the operating diagrams in the plan, we must fixe one of the three operating parameters s_0^{in} , s_1^{in} or D . We determine first the operating diagrams in the plane (s_0^{in}, D) , for fixed values of s_1^{in} . Then, we fix s_0^{in} and the stability regions are described in the plane (s_1^{in}, D) . We can also fix the dilution rate D , if needed, and give the stability regions in the plane (s_1^{in}, s_0^{in}) . For sake of brevity, we do not give this last diagram, in the present work.

The operating diagrams are divided at most into six regions, colored into four different colors corresponding to the stability regions of the four steady-states. In all cases, we have shown that, whatever the region of space considered, there exists only one locally exponentially stable steady state.

The operating diagrams can be useful to interpret experimental results. The biologists use the results of operating diagrams to know what value of operating parameters to choose for controlling the biogaz (methane or hydrogen) rate product. In particular, R^4 , R^5 and R^6 are the regions of interest for an operator (regions where the coexistence of all species is guaranteed). To optimize the process, one may now couple the informations provided by these diagrams together with plots representing the total amount of biogas produced. Then, two cases may arise: either the operator can act on the input substrate characteristics (for instance in combining several substrate deposits for instance within the framework of codigestion) or he can predict the issue of the process performance given input characteristics.

APPENDIX A

Proof of Proposition 2.1. For all initial condition $s_0(0) \geq 0$, if it exists one first time $t_0 > 0$ such as $s_0(t_0) = 0$, then we have $\dot{s}_0(t_0) = Ds_0^{in} > 0$. Therefore $s_0(t) > 0$ for all $t > t_0$. Since $s_0(t) \geq 0$ for all $t \in [0, t_0]$, then $s_0(t) \geq 0$ for all $t \geq 0$.

On the other hand, for all initial conditions $x_i(t) \geq 0$ for $i = 1, 2$, if it exists one first time $t_0 > 0$ such as $x_i(t_0) = 0$, then we have $\dot{x}_i(t_0) = 0$, then $x_i(t)$ are null from this time t_0 , then $x_i(t) \geq 0$ for all $t \geq 0$.

Finally, for all initial condition $s_1(0) \geq 0$, if it exists one first time $t_0 > 0$ such as $s_1(t_0) = 0$, we obtained $\dot{s}_1(t_0) = \mu_0(s_0, 0)x_0 + Ds_1^{in} > 0$. Therefore $s_1(t) \geq 0$ for all $t > t_0$. Since $s_1(t) \geq 0$ for all $t \in [0, t_0]$, then $s_1(t) \geq 0$ for all $t \geq 0$.

This proves the positivity of solutions of (2.1).

To demonstrate that all solutions of (1) are bounded, we set $z = 2s_0 + x_0 + s_1 + x_1$ then

$$\dot{z} = D(2s_0^{in} + s_1^{in} - z) - a_0x_0 - a_1x_1.$$

We deduce that, $\dot{z} \leq D(2s_0^{in} + s_1^{in} - z)$. We now set

$$v = z - 2s_0^{in} - s_1^{in},$$

then, $\dot{v} \leq -Dv$. By applying Gronwall Lemma, we obtain $v(t) \leq v(0)e^{-Dt}$ and consequently

$$z(t) \leq (2s_0^{in} + s_1^{in}) + (-2s_0^{in} - s_1^{in} + z(0))e^{-Dt}, \text{ for all } t \geq 0.$$

We deduce that

$$z(t) \leq \max(z(0), 2s_0^{in} + s_1^{in}) \text{ for all } t \geq 0.$$

Consequently, the solutions of (2.1) are bounded for all $t \geq 0$. □

Proof of Proposition 3.1. From the equivalence

$$s_0 = M_0(y, s_1) \iff y = \mu_0(s_0, s_1),$$

we have:

$$\text{for all } y \in [0, m_0(s_1)[\text{ and } s_1 \geq 0, \quad \mu_0(M_0(y, s_1), s_1) = y. \quad (\text{A.1})$$

Then, if we take the derivative of equation (A.1) according to y and we use **H3**, we obtain:

$$\frac{\partial M_0}{\partial y}(y, s_1) = \left[\frac{\partial \mu_0}{\partial s_0}(M_0(y, s_1), s_1) \right]^{-1} > 0.$$

Now, if we take the derivative of equation (A.1) according to s_1 and we use **H3**, we obtain:

$$\frac{\partial M_0}{\partial s_1}(y, s_1) = - \left[\frac{\partial \mu_0}{\partial s_1}(M_0(y, s_1), s_1) \left[\frac{\partial \mu_0}{\partial s_0}(M_0(y, s_1), s_1) \right]^{-1} \right] > 0.$$

Finally, from the equivalence $s_1 = M_1(y) \iff y = \mu_1(s_1)$, we have for all $y \in [0, m_1[$, $\mu_1(M_1(y)) = y$. Taking the derivative of this equation according to y and using **H4**, we obtain:

$$\frac{dM_1}{dy}(y) = \left[\frac{\partial \mu_1}{\partial s_1}(M_1(y)) \right]^{-1} > 0.$$

□

Proposition 3.1 is necessary to establish the results of Proposition 3.2.

Proof of Proposition 3.2. A steady state (s_0, x_0, s_1, x_1) of (2.1) is a solution of the set of algebraic equations (3.1)–(3.4).

- For SS0, $x_0 = 0, x_1 = 0$. As a result of (3.1) and (3.3), we deduce that $s_0 = s_0^{in}$ and $s_1 = s_1^{in}$. Then, $SS0 = (s_0^{in}, 0, s_1^{in}, 0)$. It always exists.
- For SS1, $x_0 \neq 0, x_1 = 0$. As a consequence of (3.2), we deduce that $\mu_0(s_0, s_1) = D + a_0$. We have

$$D(s_0^{in} - s_0) = \mu_0(s_0, s_1)x_0 \quad \text{and} \quad D(s_1 - s_1^{in}) = \mu_0(s_0, s_1)x_0.$$

Hence, $x_0 = \frac{D}{D+a_0}(s_0^{in} - s_0)$ and $D(s_0^{in} - s_0) = D(s_1 - s_1^{in})$, so that $s_0 + s_1 = s_0^{in} + s_1^{in}$. Therefore, s_0 is a solution of equation

$$\mu_0(s_0, s_0^{in} + s_1^{in} - s_0) = D + a_0.$$

SS1 exists if and only if this equation has a solution in the interval $(0, s_0^{in} + s_1^{in})$.

The function

$$s_0 \mapsto \psi(s_0) = \mu_0(s_0, s_0^{in} + s_1^{in} - s_0)$$

is strictly increasing since its derivative

$$\frac{d\psi}{ds_0}(s_0) = \frac{\partial \mu_0}{\partial s_0}(s_0, s_1) - \frac{\partial \mu_0}{\partial s_1}(s_0, s_1)$$

is positive.

Using $\psi(0) = 0$ and $\psi(s_0^{in} + s_1^{in}) = \mu_0(s_0^{in} + s_1^{in}, 0)$ we conclude that equation $\mu_0(s_0, s_0^{in} + s_1^{in} - s_0) = D + a_0$ has a solution in the interval $(0, s_0^{in} + s_1^{in})$ if and only if $\psi(s_0^{in} + s_1^{in}) = \mu_0(s_0^{in} + s_1^{in}, 0) > D + a_0$, which means that:

$$s_0^{in} + s_1^{in} > M_0(D + a_0, 0).$$

Now, SS1 exists if and only if all his components are strictly positive. For that, it's sufficient that $s_0 < s_0^{in}$ because $s_0^{in} < s_0^{in} + s_1^{in}$. By applying ψ who is strictly increasing and by using μ_0 , we obtain: $D + a_0 < \mu_0(s_0^{in}, s_1^{in})$ which is equivalent to say that:

$$s_0^{in} > M_0(D + a_0, s_1^{in}).$$

Since $s_0^{in} < s_0^{in} + s_1^{in}$, using the same arguments, we obtain: $\mu_0(s_0^{in}, s_1^{in}) < \mu_0(s_0^{in} + s_1^{in}, 0)$. So, if

$$D + a_0 < \mu_0(s_0^{in}, s_1^{in}),$$

then, necessarily

$$D + a_0 < \mu_0(s_0^{in} + s_1^{in}, 0).$$

Therefore, SS1 exists if and only if

$$s_0^{in} > M_0(D + a_0, s_1^{in}).$$

Then, $SS1 = (s_{01}, x_{01}, s_{11}, 0)$, where s_{01} is the solution of the equation:

$\mu_0(s_{01}, (s_0^{in} + s_1^{in}) - s_{01}) = D + a_0$, $x_{01} = \frac{D}{D+a_0}(s_0^{in} - s_{01})$ and $s_{11} = (s_0^{in} + s_1^{in}) - s_{01}$. It exists if and only if $s_0^{in} > M_0(D + a_0, s_1^{in})$.

- For SS2, $x_0 \neq 0$ et $x_1 \neq 0$. As a consequence of (3.2) and (3.4), we deduce that s_0 and s_1 are solutions of the set of equations

$$\mu_0(s_0, s_1) = D + a_0, \quad \mu_1(s_1) = D + a_1.$$

Applying M_1 , we obtain $s_1 = M_1(D + a_1)$ and s_0 is a solution of equation

$$\mu_0(s_0, M_1(D + a_1)) = D + a_0$$

Applying M_0 , we obtain $s_0 = M_0(D + a_0, M_1(D + a_1))$. As a result of (3.1) and (3.3)

$$x_0 = \frac{D}{D + a_0} (s_0^{in} - s_0), \quad x_1 = \frac{D}{D + a_1} (s_0^{in} + s_1^{in} - s_0 - s_1).$$

SS2 exists if and only if $s_0^{in} + s_1^{in} > s_0 + s_1$ and $s_0^{in} > s_0$. This means that:

$$s_0^{in} + s_1^{in} > M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1),$$

and

$$s_0^{in} > M_0(D + a_0, M_1(D + a_1)).$$

Then, $SS2 = (s_{02}, x_{02}, s_{12}, x_{12})$, where $s_{02} = M_0(D + a_0, M_1(D + a_1))$, $x_{02} = \frac{D}{D+a_0}(s_0^{in} - s_{02})$, $s_{12} = M_1(D + a_1)$ and $x_{12} = \frac{D}{D+a_1}((s_0^{in} + s_1^{in}) - s_{02} - s_{12})$. It exists if and only if $s_0^{in} > M_0(D + a_0, M_1(D + a_1))$ and $s_0^{in} + s_1^{in} > M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1)$.

- For SS3, $x_0 = 0$ et $x_1 \neq 0$. As a consequence of (3.1) and (3.4), we deduce that $s_0 = s_0^{in}$ and s_1 are solution of this equation

$$\mu_1(s_1) = D + a_1.$$

Applying M_1 , we obtain

$$s_1 = M_1(D + a_1)$$

As a result of (4), we have:

$$x_1 = \frac{D}{D + a_1} (s_1^{in} - M_1(D + a_1)).$$

Then, $SS3 = (s_0^{in}, 0, M_1(D + a_1), \frac{D}{D + a_1} (s_1^{in} - M_1(D + a_1)))$. It exists if and only if $s_1^{in} > M_1(D + a_1)$. \square

Proof of Proposition 4.1. The local stability of each steady state depends on the sign of the real parts of the eigenvalues of the corresponding Jacobian matrix. At a given steady state (s_0, x_0, s_1, x_1) , this matrix is given by:

$$J = \begin{bmatrix} -D - Ex_0 & -\mu_0 & Fx_0 & 0 \\ Ex_0 & \mu_0 - D - a_0 & -Fx_0 & 0 \\ Ex_0 & \mu_0 & -D - Fx_0 - Gx_1 & -\mu_1 \\ 0 & 0 & Gx_1 & \mu_1 - D - a_1 \end{bmatrix}, \quad (\text{A.2})$$

where

$$E = \frac{\partial \mu_0}{\partial s_0}(s_0, s_1) > 0, \quad F = -\frac{\partial \mu_0}{\partial s_1}(s_0, s_1) > 0, \quad G = \frac{d\mu_1}{ds_1}(s_1) > 0.$$

The eigenvalues of (A.2) are the roots of its characteristic polynomial $\det(J - \lambda I)$. Notice that we have used the opposite sign for the partial derivative $F = -\frac{\partial \mu_0}{\partial s_1}(s_0, s_1)$, so that all constants involved in the computations become positive, which will simplify the analysis of the characteristic polynomial of (A.2).

- For $SS0 = (s_0^{in}, 0, s_1^{in}, 0)$, the Jacobian matrix (A.2) reads

$$J = \begin{bmatrix} -D & -\mu_0(s_0^{in}, s_1^{in}) & 0 & 0 \\ 0 & \mu_0(s_0^{in}, s_1^{in}) - D - a_0 & 0 & 0 \\ 0 & \mu_0(s_0^{in}, s_1^{in}) & -D & -\mu_1(s_1^{in}) \\ 0 & 0 & 0 & \mu_1(s_1^{in}) - D - a_1 \end{bmatrix}.$$

Its eigenvalues are $\lambda_1 = \mu_0(s_0^{in}, s_1^{in}) - D - a_0$, $\lambda_2 = \mu_1(s_1^{in}) - D - a_1$ and $\lambda_3 = \lambda_4 = -D$. For being stable, we need $\lambda_1 < 0$ and $\lambda_2 < 0$. Therefore, SS0 is stable if and only if

$$\mu_0(s_0^{in}, s_1^{in}) < D + a_0,$$

and

$$\mu_1(s_1^{in}) < D + a_1.$$

For s_1 fixed, since the function $s_0 \mapsto \mu_0(s_0, s_1)$ is increasing, we have the following equivalence:

$$\mu_0(s_0^{in}, s_1^{in}) < D + a_0 \iff s_0^{in} < M_0(D + a_0, s_1^{in}).$$

The function $s_1 \mapsto \mu_1(s_1)$ is increasing, then we have:

$$\mu_1(s_1^{in}) < D + a_1 \iff s_1^{in} < M_1(D + a_1).$$

Therefore, $SS0$ is locally exponentially stable if and only if $s_1^{in} < M_1(D + a_1)$ and $s_0^{in} < M_0(D + a_0, s_1^{in})$.

- For $SS1 = (s_{01}, x_{01}, s_{11}, 0)$, where s_{01} is the solution of the equation: $\mu_0(s_{01}, (s_0^{in} + s_1^{in}) - s_{01}) = D + a_0$, $x_{01} = \frac{D}{D+a_0}(s_0^{in} - s_{01})$ and $s_{11} = (s_0^{in} + s_1^{in}) - s_{01}$, the Jacobian matrix (A.2) becomes:

$$J = \begin{bmatrix} -D - Ex_0 & -D - a_0 & Fx_0 & 0 \\ Ex_0 & 0 & -Fx_0 & 0 \\ Ex_0 & D + a_0 & -D - Fx_0 & -\mu_1 \\ 0 & 0 & 0 & \mu_1 - D - a_1 \end{bmatrix}$$

Its characteristic polynomial is:

$$\det(J - \lambda I) = (\lambda - \mu_1 + D + a_1)(\lambda + D) (\lambda^2 + [D + (E + F)x_0] \lambda + (D + a_0)(E + F)x_0)$$

Its eigenvalues are $\lambda_1 = \mu_1 - D - a_1$, $\lambda_2 = -D$ and λ_3 and λ_4 are the roots of the following quadratic equation:

$$\lambda^2 + [D + (E + F)x_0] \lambda + (D + a_0)(E + F)x_0 = 0$$

Since $\lambda_3 \lambda_4 = (D + a_0)(E + F)x_0 > 0$ and $\lambda_3 + \lambda_4 = -[D + (E + F)x_0] < 0$, the real parts of λ_3 and λ_4 are negative. So, for being stable we must have $\lambda_1 < 0$. Therefore, $SS1$ is stable if and only if

$$\mu_1(s_0^{in} + s_1^{in} - s_0) < D + a_1$$

where s_0 is the solution of $\mu_0(s_0, (s_0^{in} + s_1^{in}) - s_0) = D + a_0$. Since the function $s_1 \mapsto \mu_1(s_1)$ is increasing, we have the following equivalence

$$\mu_1(s_0^{in} + s_1^{in} - s_0) < D + a_1 \iff s_0 > s_0^{in} + s_1^{in} - M_1(D + a_1).$$

Since the function $s_0 \mapsto \psi(s_0) = \mu_0(s_0, s_0^{in} + s_1^{in} - s_0)$ is increasing, we deduce that $\psi(s_0) > \psi(s_0^{in} + s_1^{in} - M_1(D + a_1))$. Since,

$$\psi(s_0) = \mu_0(s_0, s_0^{in} + s_1^{in} - s_0) = D + a_0$$

Therefore, the condition $\mu_1(s_0^{in} + s_1^{in} - s_0) < D + a_1$ of stability of $SS1$ is equivalent to:

$$D + a_0 > \mu_0(s_0^{in} + s_1^{in} - M_1(D + a_1), M_1(D + a_1)).$$

Since the function $s_0 \mapsto \mu_0(s_0, M_1(D + a_1))$ is increasing, the condition $D + a_0 > \mu_0(s_0^{in} + s_1^{in} - M_1(D + a_1), M_1(D + a_1))$ is equivalent to

$$s_0^{in} + s_1^{in} - M_1(D + a_1) < M_0(D + a_0, M_1(D + a_1)),$$

which is equivalent to

$$s_0^{in} + s_1^{in} < M_1(D + a_1) + M_0(D + a_0, M_1(D + a_1)).$$

Therefore, $SS1$ is locally exponentially stable if and only if $s_0^{in} + s_1^{in} < M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1)$.

- For $SS2 = (s_{02}, x_{02}, s_{12}, x_{12})$, where $s_{02} = M_0(D + a_0, M_1(D + a_1))$, $x_{02} = \frac{D}{D+a_0}(s_0^{in} - s_{02})$, $s_{12} = M_1(D + a_1)$ and $x_{12} = \frac{D}{D+a_1}((s_0^{in} + s_1^{in}) - s_{02} - s_{12})$.

At $SS2$, the Jacobian matrix is given by:

$$J = \begin{bmatrix} -D - Ex_0 & -D - a_0 & Fx_0 & 0 \\ Ex_0 & 0 & -Fx_0 & 0 \\ Ex_0 & D + a_0 & -D - Fx_0 - Gx_1 & -D - a_1 \\ 0 & 0 & Gx_1 & 0 \end{bmatrix}.$$

Its characteristic polynomial is:

$$\det(J - \lambda I) = \lambda^4 + f_1\lambda^3 + f_2\lambda^2 + f_3\lambda + f_4,$$

where

$$\begin{aligned} f_1 &= Gx_1 + (E + F)x_0 + 2D, \\ f_2 &= EGx_0x_1 + (2D + a_0)(E + F)x_0 + (2D + a_1)Gx_1 + D^2, \\ f_3 &= (2D + a_0 + a_1)EGx_0x_1 + D(D + a_0)(E + F)x_0 + D(D + a_1)Gx_1, \\ f_4 &= (D + a_0)(D + a_1)EGx_0x_1. \end{aligned}$$

We use the Routh–Hurwitz criterion for the stability of $SS2$. Using the same arguments as Appendix D [5], we have:

$$f_i > 0 \text{ for } i = 1, \dots, 4, \quad (\text{A.3})$$

$$f_1f_2 - f_3 > 0, \quad (\text{A.4})$$

$$f_1f_2f_3 - f_1^2f_4 - f_3^2 > 0. \quad (\text{A.5})$$

According to (A.3), (A.4) and (A.5) the Routh–Hurwitz criteria are satisfied. Therefore, $SS2$ is stable if and only if $x_0 = x_{02} > 0$ and $x_1 = x_{12} > 0$. This means that $s_0^{in} > M_0(D + a_0, M_1(D + a_1))$ and $s_0^{in} + s_1^{in} > M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1)$. Therefore, $SS2$ is stable as long as it exists.

- For $SS3 = \left(s_0^{in}, 0, M_1(D + a_1), \frac{D}{D+a_1}(s_1^{in} - M_1(D + a_1))\right)$, the Jacobian matrix (A.2) becomes

$$J = \begin{bmatrix} -D & -\mu_0 & 0 & 0 \\ 0 & \mu_0 - D - a_0 & 0 & 0 \\ 0 & \mu_0 & -D - Gx_1 & -D - a_1 \\ 0 & 0 & Gx_1 & 0 \end{bmatrix}.$$

Its characteristic polynomial is:

$$\det(J - \lambda I) = (-D - \lambda)(\mu_0 - D - a_0 - \lambda)([D + Gx_1 + \lambda]\lambda + (D + a_1)Gx_1).$$

Its eigenvalues are $\lambda_1 = -D$, $\lambda_2 = \mu_0 - D - a_0$ and λ_3 and λ_4 are the roots of the following quadratic equation:

$$\lambda^2 + [D + Gx_1]\lambda + (D + a_1)Gx_1 = 0.$$

Since $\lambda_3\lambda_4 = (D + a_1)Gx_1 > 0$ and $\lambda_3 + \lambda_4 = -(D + Gx_1) < 0$, the real parts of λ_3 and λ_4 are negative. Therefore, SS3 is locally exponentially stable if and only if $\lambda_2 < 0$, that is to say

$$\mu_0(s_0^{in}, M_1(D + a_1)) < D + a_0,$$

which is equivalent to

$$s_0^{in} < M_0(D + a_0, M_1(D + a_1)).$$

□

Proof of Proposition 4.2. F_0 is defined if and only if $M_0(D + a_0, s_1^{in})$ is defined. This means that, $D + a_0 < m_0(s_1^{in})$ which is equivalent to $D < m_0(s_1^{in}) - a_0 = D_0$.

F_1 is defined if and only if $M_1(D + a_1)$ and $M_0(D + a_0, M_1(D + a_1))$ are defined. This means that, $D + a_1 < m_1$ and $D + a_0 < m_0(M_1(D + a_1))$. Since the function $D \mapsto m_0(M_1(D + a_1))$ is decreasing then $m_0(M_1(D + a_1)) < m_0(M_1(a_1))$. $D + a_0 < m_0(M_1(D + a_1))$ is satisfied if and only if $D < D_2$ where D_2 is the positive solution, if it exists, of $D + a_0 = m_0(M_1(D + a_1))$. The solution $D_2 \geq 0$ exists if and only if $a_0 < m_0(M_1(a_1))$. Thus, F_1 is defined on $[0, \min(m_1 - a_1, D_2)[$.

By the same way, F_2 is defined on $[0, D_2[$ when it exists. □

The idea of the proof of Theorem 5.2 is based on Lemma 5.1 and comparison between the growth functions. We first prove Lemma 5.1.

Proof of Lemma 5.1.

- If we have $\mu_1(s_1^{in}) < a_1 < D + a_1$ then $s_1^{in} < M_1(D + a_1)$. M_0 is increasing with respect to the second variable then $M_0(D + a_0, s_1^{in}) < M_0(D + a_0, M_1(D + a_1))$. By using $s_1^{in} < M_1(D + a_1)$, which is equivalent to $M_1(D + a_1) - s_1^{in} > 0$, we obtain

$$M_0(D + a_0, s_1^{in}) < M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1) - s_1^{in}.$$

Therefore, $F_0(D) < F_1(D) - s_1^{in}$, for all $D > 0$.

- If we have $\mu_1(s_1^{in}) > a_1$ and $D > \bar{D} = \mu_1(s_1^{in}) - a_1 \Leftrightarrow \mu_1(s_1^{in}) < D + a_1$. Then, $s_1^{in} < M_1(D + a_1)$ and $M_0(D + a_0, s_1^{in}) < M_0(D + a_0, M_1(D + a_1))$. Since $M_1(D + a_1) > s_1^{in}$, we obtain

$$M_0(D + a_0, s_1^{in}) < M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1) - s_1^{in}.$$

Therefore, $F_0(D) < F_1(D) - s_1^{in}$, for all $D > 0$.

- If we have $\mu_1(s_1^{in}) > a_1$ and $D < \bar{D} = \mu_1(s_1^{in}) - a_1 \Leftrightarrow M_1(D + a_1) < s_1^{in}$. Then, we have

$$M_0(D + a_0, M_1(D + a_1)) < M_0(D + a_0, s_1^{in}).$$

Therefore, $F_2(D) < F_0(D)$, for all $D > 0$.

□

Proof of Theorem 5.2. Theorem 5.2 follows from Lemma 5.1 and the next inequalities:

- If $\mu_1(s_1^{in}) < a_1$ and $F_1(D) - s_1^{in} < s_0^{in}$ then $F_2(D) < s_0^{in}$, for all $D > 0$.
Indeed, if $\mu_1(s_1^{in}) < a_1$ then $M_1(D + a_1) - s_1^{in} > 0$. Then,

$$M_0(D + a_0, M_1(D + a_1)) < M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1) - s_1^{in} = F_1(D) - s_1^{in}.$$

Since $F_1(D) - s_1^{in} < s_0^{in}$ then $F_2(D) < s_0^{in}$.

- If $\mu_1(s_1^{in}) > a_1$, $D > \bar{D}$ and $F_1(D) - s_1^{in} < s_0^{in}$ then $F_2(D) < s_0^{in}$, for all $D > 0$.
Indeed, $D > \bar{D} \Leftrightarrow \mu_1(s_1^{in}) < D + a_1 \Leftrightarrow M_1(D + a_1) - s_1^{in} > 0$. Then,

$$M_0(D + a_0, M_1(D + a_1)) < M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1) - s_1^{in} = F_1(D) - s_1^{in}.$$

Finally, $F_1(D) - s_1^{in} < s_0^{in}$ implies that $F_2(D) < s_0^{in}$.

- If $\mu_1(s_1^{in}) > a_1$, $D < \bar{D}$ and $F_0(D) < s_0^{in}$ then $F_1(D) - s_1^{in} < s_0^{in}$, for all $D > 0$.
Indeed, $D < \bar{D} = \mu_1(s_1^{in}) - a_1 \Leftrightarrow M_1(D + a_1) < s_1^{in}$. Since $F_0(D) = M_0(D + a_0, s_1^{in}) < s_0^{in}$, then

$$F_1(D) - s_1^{in} = M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1) - s_1^{in} < M_0(D + a_0, s_1^{in}),$$

which implies that $F_1(D) - s_1^{in} < s_0^{in}$.

- If $\mu_1(s_1^{in}) > a_1$, $D < \bar{D}$ and $F_2(D) < s_0^{in}$ then $F_1(D) - s_1^{in} < s_0^{in}$, for all $D > 0$.
Indeed, $D < \bar{D} = \mu_1(s_1^{in}) - a_1 \Leftrightarrow M_1(D + a_1) < s_1^{in}$. Since $F_2(D) = M_0(D + a_0, M_1(D + a_1)) < s_0^{in}$, then

$$F_1(D) - s_1^{in} = M_0(D + a_0, M_1(D + a_1)) + M_1(D + a_1) - s_1^{in} < M_0(D + a_0, M_1(D + a_1)).$$

Finally, we obtain

$$F_1(D) - s_1^{in} < s_0^{in}.$$

□

The proof of Theorem 5.4 is based on Lemma 5.3 and comparison between growth functions. We first prove Lemma 5.3.

Proof of Lemma 5.3.

- If $D > \bar{D}_1$ then $F_2(D) > F_2(\bar{D}_1) = s_0^{in}$ and we obtain

$$F_1(D) - s_0^{in} > F_1(D) - F_2(D).$$

In the other hand, we have $M_0(D + a_0, M_1(D + a_1)) > s_0^{in}$. Since μ_0 is increasing with respect to the first variable then $D + a_0 > \mu_0(s_0^{in}, M_1(D + a_1))$. M_2 is decreasing with respect to the second variable then $M_2(s_0^{in}, D + a_0) < M_1(D + a_1)$. Finally, we obtain

$$F_1(D) - F_2(D) > F_3(D).$$

- If $D < \bar{D}_1$ and $\bar{D}_1 > 0$, then $F_2(D) < F_2(\bar{D}_1) = s_0^{in}$ and we obtain

$$F_1(D) - s_0^{in} < F_1(D) - F_2(D).$$

Now, $M_0(D + a_0, M_1(D + a_1)) < s_0^{in}$ implies that $D + a_0 < \mu_0(s_0^{in}, M_1(D + a_1))$. M_2 is decreasing with respect to the second variable then $M_2(s_0^{in}, D + a_0) > M_1(D + a_1)$. Finally, we obtain

$$F_1(D) - F_2(D) < F_3(D).$$

- We have $F_2(\bar{D}_1) = s_0^{in}$ then $F_1(\bar{D}_1) - F_2(\bar{D}_1) = F_1(\bar{D}_1) - s_0^{in}$. This implies that $F_1 - F_2$ and $F_1 - s_0^{in}$ intersect at the value $D = \bar{D}_1$. On the other hand, $F_2(\bar{D}_1) = s_0^{in}$ is equivalent to $M_0(\bar{D}_1 + a_0, M_1(\bar{D}_1 + a_1)) = s_0^{in}$. Then, we have $\mu_0(s_0^{in}, M_1(\bar{D}_1 + a_1)) = \bar{D}_1 + a_0$. Now, $F_3(\bar{D}_1) = M_2(s_0^{in}, \bar{D}_1 + a_0)$ which is equivalent to $\mu_0(s_0^{in}, F_3(\bar{D}_1)) = \bar{D}_1 + a_0$. The two last equalities lead to $F_3(\bar{D}_1) = M_1(\bar{D}_1 + a_1)$. Thus, $F_3(\bar{D}_1) = F_1(\bar{D}_1) - F_2(\bar{D}_1) = F_1(\bar{D}_1) - s_0^{in}$. Consequently, F_3 , $F_1 - F_2$ and $F_1 - s_0^{in}$ intersect at $D = \bar{D}_1$. Since F_3 is decreasing, then $\bar{D}_3 = \sup_D F_3(D)$ then $\bar{D}_3 > \bar{D}_1$. \square

Proof of Theorem 5.4. Theorem 5.4 is a consequence of Lemma 5.3. Notice that if $\bar{D}_3 < 0$ then $F_3(D) < 0$ and since $\bar{D}_1 < \bar{D}_3$, the case $\bar{D}_1 > 0$ and $\bar{D}_3 < 0$ cannot occur. \square

Acknowledgements. The authors thank the Euromed 3 + 3 project TREASURE (<http://www.inra.fr/treasure>) and the project PHC- UTIQUÉ 13G1120 who partly financed this research.

REFERENCES

- [1] A. Burchard, Substrate degradation by a mutualistic association of two species in the chemostat. *J. Math. Biol.* **32** (1994) 465–489.
- [2] M. El Hajji, F. Mazenc and J. Harmand, A mathematical study of a syntrophic relationship of a model of anaerobic digestion process. *Math. Biosci. Eng.* **7** (2010) 641–656.
- [3] R. Kreikenbohm and E. Bohl, A mathematical model of syntrophic cocultures in the chemostat. *FEMS Microbiol. Ecol.* **38** (1986) 131–140.
- [4] R. Kreikenbohm and E. Bohl, Bistability in the chemostat. *Ecol. Model.* **43** (1988) 287–301.
- [5] T. Sari and J. Harmand, A model of a syntrophic relationship between two microbial species in a chemostat including maintenance. *Math. Biosci. Eng.* **275** (2016) 1–9.
- [6] T. Sari, M. El Hajji and J. Harmand, The mathematical analysis of a syntrophic relationship between two microbial species in a chemostat. *Math. Biosci. Eng.* **9** (2012) 627–645.
- [7] G. Stephanopoulos, The dynamics of commensalism. *Biotechnol. Bioeng.* **23** (1981) 2243–2255.
- [8] E.I.P. Volcke, M. Sbarciog, E.J.L. Noldus, B. De Baets and M. Loccufier, steady state multiplicity of two-step biological conversion systems with general kinetics. *Math. Biosci.* **228** (2010) 160–170.
- [9] M.J. Wade, R.W. Pattinson, N.G. Parker and J. Dolfing, Emergent behaviour in a chlorophenol-mineralising three-tiered microbial “food web”. *Theor. Biol.* **389** (2016) 171–186.
- [10] T.G. Wilkinson, H.H. Topiwala and G. Hamer, Interactions in a mixed bacterial population growing on methane in continuous culture. *Biotechnol. Bioeng.* **16** (1974) 41–59.
- [11] A. Xu, J. Dolfing, T.P. Curtis, G. Montague and E. Martin, Maintenance affects the stability of a two-tiered microbial “food chain”. *J. Theor. Biol.* **276** (2011) 35–41.