



**HAL**  
open science

## **Effects of operational parameters on dark fermentative hydrogen production from biodegradable complex waste biomass**

Anish Ghimire, Fabio Sposito, Luigi Frunzo, Eric Trably, Renaud R. Escudie, Francesco Pirozzi, Piet N.L. Lens, Giovanni Esposito

### ► **To cite this version:**

Anish Ghimire, Fabio Sposito, Luigi Frunzo, Eric Trably, Renaud R. Escudie, et al.. Effects of operational parameters on dark fermentative hydrogen production from biodegradable complex waste biomass. Waste Management, 2016, 50, pp.55-64. <10.1016/j.wasman.2016.01.044>. <hal-02635261>

**HAL Id: hal-02635261**

**<https://hal.inrae.fr/hal-02635261v1>**

Submitted on 4 Aug 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

1           **Effects of operational parameters on dark fermentative hydrogen**  
2                           **production from biodegradable complex waste biomass**

3  
4 Anish Ghimire<sup>a,b,\*</sup>, Fabio Sposito<sup>b</sup>, Luigi Frunzo<sup>c</sup>, Eric Trably<sup>d</sup>, Renaud Escudie<sup>d</sup>, Francesco  
5 Pirozzi<sup>b</sup>, Piet N.L. Lens<sup>e</sup>, Giovanni Esposito<sup>a</sup>

6  
7 <sup>a</sup>Department of Civil and Mechanical Engineering, University of Cassino and Southern  
8 Lazio, via Di Biasio 43, 03043 Cassino (FR), Italy

9 <sup>b</sup>Department of Civil, Architectural and Environmental Engineering, University of Naples  
10 Federico II, via Claudio 21, 80125 Naples, Italy

11 <sup>c</sup>Department of Mathematics and Applications Renato Caccioppoli, University of Naples  
12 Federico II, via Cintia, Monte S. Angelo, I-80126 Naples, Italy

13 <sup>d</sup>INRA, UR0050 Laboratoire de Biotechnologie de l'Environnement, Avenue des Etangs, F-  
14 11100 Narbonne, France

15 <sup>e</sup>UNESCO-IHE Institute for Water Education, Westvest 7, 2611 AX Delft, The Netherlands

16  
17 \* Corresponding author. Address: Department of Civil and Mechanical Engineering,  
18 University of Cassino and Southern Lazio, via Di Biasio 43, 03043 Cassino (FR), Italy.  
19 Tel. +39 0776 2994339 Fax +39 0776-2993939  
20 *E-mail address:* a.ghimire@unicas.it, anishghimire@gmail.com (Anish Ghimire)

## 21 **Abstract**

22 This paper aimed to investigate the effect of the initial pH, combination of food to  
23 microorganism ratio (F/M) and initial pH, substrate pre-treatment and different inoculum  
24 sources on the dark fermentative biohydrogen (H<sub>2</sub>) yields. Three model complex waste  
25 biomasses (food waste, olive mill wastewater (OMWW) and rice straw) were used to assess  
26 the effect of the aforementioned parameters. The effect of the initial pH between 4.5 - 7.0  
27 was investigated in batch tests carried out with food waste. The highest H<sub>2</sub> yields were shown  
28 at initial pH 4.5 (60.6 ± 9.0 mL H<sub>2</sub>/g VS) and pH 5 (50.7 ± 0.8 mL H<sub>2</sub>/g VS). Furthermore,  
29 tests carried out with F/M ratios of 0.5, 1.0 and 1.5 at initial pH 5.0 and 6.5 revealed that a  
30 lower F/M ratio (0.5 and 1.0) favored the H<sub>2</sub> production at an initial pH 5.0 compared to pH  
31 6.5. Alkaline pre-treatment of raw rice straw using 4% and 8% NaOH at 55 °C for 24 hours,  
32 increased the H<sub>2</sub> yield by 26 and 57 fold, respectively. In the dark fermentation of OMWW,  
33 the H<sub>2</sub> yield was doubled when heat-shock pre-treated activated sludge was used as inoculum  
34 in comparison to anaerobic sludge. Overall, this study shows that the application of different  
35 operating parameters to maximize the H<sub>2</sub> yields strongly depends on the biodegradability of  
36 the substrate.

37

38 **Keywords:** Biohydrogen; dark fermentation; waste biomass; biofuels; waste valorization

39

## 40 **Highlights**

- 41 • Combination of initial pH and F/M ratio affects H<sub>2</sub> yields from DF of food waste.
- 42 • Alkaline pre-treatment enhances the dark fermentative conversion of rice straw.
- 43 • Inoculum source and pre-treatment conditions influence H<sub>2</sub> yields in DF of OMWW.
- 44 • The selection of optimal operating parameters depends on substrate biodegradability.

45

46

## 47 **1 Introduction**

48 Dark fermentation (DF) of organic waste is one of the promising technologies for  
49 biohydrogen (H<sub>2</sub>) production. The DF processes are usually preferred over other light  
50 dependent, photofermentation or biophotolysis processes because of the high bioreactor  
51 productivities and the potential to utilize a wide range of organic wastes as feedstock  
52 (Hallenbeck et al., 2009; Urbaniec and Bakker, 2015). In addition, the associated production  
53 of organic acids and alcohols, among others, can be either used in sidestream processes like  
54 anaerobic digestion for methane or photofermentative H<sub>2</sub> production for energy recovery, or  
55 can be used for the production of platform molecules (Bastidas-Oyanedel et al., 2015; Sarma  
56 et al., 2015).

57

58 Waste biomass is abundant and can sustain DF processes in scaled-up applications. An easily  
59 degradable food waste (the organic fraction of municipal solid waste (OFMSW)), more  
60 slowly degradable agricultural residues (i.e. rice straw) as well as agro-industrial waste such  
61 as olive mill wastewaters (OMWW) can serve as sustainable feedstock sources for dark  
62 fermentative H<sub>2</sub> production (Guo et al., 2010; Kapdan and Kargi, 2006; Ntaikou et al., 2010;  
63 Show et al., 2012). A major bottleneck in the utilization of these low cost waste biomasses is  
64 the rather low H<sub>2</sub> yields observed in the DF processes (Ghimire et al., 2015a; Urbaniec and  
65 Bakker, 2015). Nevertheless, H<sub>2</sub> yields and process kinetics can be enhanced by optimizing  
66 operating parameters, such as pre-treatment of inocula, food to microorganisms (F/M) ratio  
67 (also substrate to inoculum ratio), pre-treatment of substrates, culture temperature and pH (De  
68 Gioannis et al., 2013; Guo et al., 2010; Ntaikou et al., 2010; Wang and Wan, 2009). During  
69 recent years, extensive experimental research has been devoted to the establish the optimal  
70 operational conditions for maximizing H<sub>2</sub> production, with a special focus on operational pH,

71 temperature and substrate utilization (De Gioannis et al., 2013; Ghimire et al., 2015a; Wong  
72 et al., 2014).

73

74 A wide range of optimal pH values have been reported for different substrates to enhance H<sub>2</sub>  
75 yields: an initial pH of 6.5 for food waste (Cappai et al., 2014), initial pH of 8.0 for food  
76 waste (Kim et al., 2011), a controlled pH of 7.0 for vegetable kitchen waste (Lee et al., 2008),  
77 an initial pH of 6.5 for rice straw (Chen et al., 2012), an initial pH of 6.0 for cheese whey (De  
78 Gioannis et al., 2014) and an initial pH of 4.5 for sucrose and starch (Khanal et al., 2004).

79 This considerable variability in culture pH is mainly due to differences in temperature,  
80 substrate type and concentration (F/M ratio), inoculum types and their pre-treatment methods.

81

82 H<sub>2</sub> yields in DF of organic waste are strongly affected by the operational temperature as it can  
83 influence the rate of hydrolysis and the production of volatile fatty acids (VFAs) and thus the  
84 final pH of the fermentation (De Gioannis et al., 2013; Ghimire et al., 2015a). A thermophilic  
85 temperature has been reported to favor the dark fermentative H<sub>2</sub> production (Shin et al., 2004;  
86 Valdez-vazquez et al., 2005). Likewise, the physico-chemical characteristics of the  
87 substrates, and most importantly the biodegradability or bioavailability (can also be defined  
88 as the fraction of easily accessible carbohydrates for fermentative conversion) crucially  
89 affects the H<sub>2</sub> production (Monlau et al., 2013a). Therefore, several studies have established a  
90 strong correlation between H<sub>2</sub> yields and the initial carbohydrate fraction (soluble sugars in  
91 some cases) present in the substrates (Alibardi and Cossu, 2015; Guo et al., 2013; Monlau et  
92 al., 2012).

93

94 In this context, alkaline pre-treatment methods have been popularly adopted for the  
95 saccharification of lignocellulosic biomass (plant stalks, rice and wheat straw), which could

96 enhance the production of H<sub>2</sub> in DF and CH<sub>4</sub> in DF coupled to anaerobic digestion,  
97 respectively and could thus give economic credentials (Monlau et al., 2015, 2013c; Sambusiti  
98 et al., 2013). Alkaline pre-treatment of lignocellulosic biomass has been reported to be  
99 carried out at different concentrations of alkaline agents (2 - 12% NaOH, weight basis),  
100 temperature (40 - 190 °C) and treatment period (30 minutes - 24 hours), with varying level of  
101 effectiveness in terms of increase in biogas yields (H<sub>2</sub> and CH<sub>4</sub>) with consequent higher net  
102 energy recovery and economic return (Monlau et al., 2015, 2013b; Sambusiti et al., 2013).  
103 However, alkaline agents (i.e. Na<sup>+</sup> from NaOH) might exert inhibitory effects on dark  
104 fermentative microbial communities (Kim et al., 2009). Consequently, an investigation of  
105 selected alkaline pre-treatment conditions for a particular substrate type becomes vital to  
106 study the conditions that enhance the H<sub>2</sub> production.

107

108 H<sub>2</sub> production from organic waste is influenced by the presence of an effective hydrolyzing,  
109 H<sub>2</sub> producing microbial community, which depends on the inoculum source and inoculum  
110 pre-treatment method (Abreu et al., 2009; Bellucci et al., 2015; Chen et al., 2012; Pakarinen  
111 et al., 2008). Abreu et al. (2009) and Chen et al. (2012) showed that the H<sub>2</sub> yields mainly  
112 depend on the inoculum sources. However, the response of fermentative microorganisms  
113 towards the presence of inhibiting substances present in a substrate can influence the DF  
114 process. In a recent study, Bellucci et al. (2015) reported a varying response of fermentative  
115 microbial communities for H<sub>2</sub> production, when the inhibitor 5-hydroxymethylfurfural  
116 (HMF) was added. This was linked to the difference in inoculum pre-treatment methods  
117 applied. Likewise, the presence of polyphenolic compounds in substrates such as OMWW  
118 can exhibit inhibitory effects on fermentative microbial communities and H<sub>2</sub> yields (Hamdi,  
119 1992; Ntaikou et al., 2009). Subsequently, investigating the effect of the inoculum source on

120 H<sub>2</sub> production performance from substrates like OMWW is fundamental to reach an optimum  
121 in H<sub>2</sub> production.

122

123 Despite some studies attempted to establish the optimal operational conditions of initial pH,  
124 F/M ratio, alkaline pre-treatment of substrate and inoculum selection, dissimilarities in H<sub>2</sub>  
125 production exist due to the differences between substrate types and experimental conditions.  
126 Therefore, it becomes essential to investigate the optimum initial pH for food waste under  
127 thermophilic DF conditions. So far, only few studies have considered the combined effects of  
128 F/M ratio and initial pH on thermophilic DF of food waste (Ginkel et al., 2001; Pan et al.,  
129 2008). Ginkel et al., (2001) revealed a profound impact of the concentration of substrate and  
130 pH on the H<sub>2</sub> yields in sucrose DF of, with an optimum pH and substrate concentration at pH  
131 of 5.5 and 7.5 g COD/L, respectively. In other study, Pan et al. (2008) established a F/M ratio  
132 of 6.0 as optimum for thermophilic DF of food waste, without the consideration of initial pH.  
133 Similarly, past studies on pre-treatment of substrates seemed more focused on maximizing  
134 the methane yields in anaerobic digestion by adopting higher concentrations of alkaline  
135 agents and treatment temperature (Monlau et al., 2013a). Therefore, optimum conditions of  
136 alkaline pre-treatment for dark fermentative H<sub>2</sub> production need to be investigated for  
137 lignocellulosic agricultural residues such as rice straw. Finally, different inoculum sources  
138 can be explored to study the effect on H<sub>2</sub> production from a typical poorly biodegradable  
139 feedstock such as OMWW, which contains polyphenolic compounds (Ntaikou et al., 2009).

140

141 The present study aims to investigate the effects of i) the initial pH and combined pH and  
142 F/M ratio on food waste, ii) alkaline substrate pre-treatment on dark fermentative H<sub>2</sub>  
143 production from rice straw and iii) the effect of inoculum source and pre-treatment on H<sub>2</sub>  
144 production from OMWW. Cumulative H<sub>2</sub> production, H<sub>2</sub> yields, H<sub>2</sub> production rates, lag

145 phase and accumulation of DF metabolites (mainly organic acids and ethanol) were used to  
146 evaluate the efficiency of these various strategies to improve the H<sub>2</sub> production performance  
147 from these complex organic wastes.

148

## 149 **2 Materials and methods**

### 150 **2.1 Inoculum**

151 Two types of inoculum, i.e. anaerobic digested sludge (ADS) and waste activated sludge  
152 (WAS) were used in the experiments. ADS was collected from the effluent of an anaerobic  
153 digestion plant of a dairy farm located in Capaccio (Salerno, Italy). The plant features include  
154 a 100 m<sup>3</sup> CSTR operating at a hydraulic retention time of 24 days and operating within a pH  
155 and temperature range of 7.4 - 7.5 and 52 - 56 °C, respectively. The plant is continuously fed  
156 with buffalo manure, cheese whey of buffalo milk and sludge from an industrial wastewater  
157 treatment plant. WAS was collected from a secondary clarifier unit at the Nola Municipal  
158 Wastewater Treatment Plant located in Naples (Campania, Italy). The characteristics of the  
159 ADS and WAS before pre-treatment are presented in Table 1. The inocula were stored at 4 °C  
160 until used. The WAS and ADS underwent a heat shock treatment (HST) at 105 °C for 1.5 and  
161 4 hours, respectively, in order to enrich spore forming *Clostridium* sp. and inhibit  
162 methanogens (Ghimire et al., 2015b). WAS had a shorter time for HST than ADS because it  
163 was obtained from an aerobic activated sludge process.

164

### 165 **2.2 Preparation of feedstock**

166 Three types of waste as reference models of complex waste biomass with different  
167 characteristic biodegradability, were used in this study: i) food waste, representative of  
168 moderately biodegradable organic waste was selected to study the effect of initial pH and  
169 substrate concentration on H<sub>2</sub> yields, ii) rice straw as a representative of slowly degrading

170 lignocellulosic agricultural residues was used to study the technical feasibility of substrate  
171 pre-treatment on biohydrogen production and iii) OMWW was used to study the effect of the  
172 inoculum type and its adaptation to toxicants, as OMWW contains phenolic compounds and  
173 long chain fatty acid that can affect microbial growth (Hamdi, 1992; Ntaikou et al., 2009).  
174 Food waste was a mixed waste with a composition similar to the one reported by  
175 VALORGAS (2010) for European countries as (% by weight): fruit and vegetables: 72%,  
176 cooked pasta and rice: 10%, bread and bakery: 5%, dairy products (cheese): 2%, meat and  
177 fish: 8% and snacks (biscuits): 3%. To prepare the food waste, food was bought fresh from  
178 municipal markets in Naples (Italy), shredded with a blender (120 W Black and Decker,  
179 Kitchen Blender) for 5 minutes without adding water and immediately stored at frozen  
180 conditions (-20 °C) to avoid acidification. The rice straw was harvested from rice fields in  
181 Pavia (Italy) in 2012 and stored inside an airtight plastic bag at room temperature. Rice straw  
182 was reduced with the help of general paper scissors to a particle size of less than 2 mm  
183 (sieved with sieve size of 2mm by 2mm). OMWW was collected from a pressure olive mill  
184 of Frascati area (Lazio, Italy) in autumn 2013 and was stored at < 4 °C until use. The  
185 characteristics of the feedstocks are presented in Table 1.

186

### 187 **2.3 Experimental set-up**

188 Batch tests were carried out in one-liter borosilicate glass bottles (Simax, Czech Republic)  
189 maintained in thermophilic conditions ( $55 \pm 2^\circ\text{C}$ ) with a thermostat in a water bath. The  
190 operating reactor volume in all experiments was 600 mL. The batch reactors were sealed with  
191 airtight caps having ports for sampling soluble metabolites and gas. The tests were carried out  
192 in duplicates with 30 reactors in total. The different sets of experiments were carried out to  
193 study the effect of the different operational parameters using the three selected model  
194 substrates (Table 2).

### 195 **2.3.1 Effect of initial pH and F/M ratios on H<sub>2</sub> yield**

196 The effect of initial pH and F/M ratio on biohydrogen production was studied with food  
197 waste and pretreated heat treated ADS as seed inoculum. The effect of the initial pH (4.5, 5,  
198 5.5, 6.0, 6.5 and 7.0) was studied at a F/M ratio 0.5 and under thermophilic conditions ( $55 \pm 2$   
199 °C). Another set of experiments was performed at F/M ratios 0.5, 1.0 and 1.5 with the two  
200 initial pH values of 5.0 and 6.5. The F/M ratios and two initial pH values were selected due to  
201 the fact that they are less affected by acidification at higher F/M ratios and the culture pH in  
202 the tests was not buffered with external alkalinity source. In addition, pH 6.5 was previously  
203 reported as optimal for food waste by Cappai et al. (2014), and thus considered for  
204 investigation in this study. The F/M ratios 0.5, 1.0 and 1.5 were obtained by adding 10 g, 18 g  
205 and 27 g food waste respectively, with a 190 g inoculum required to obtain the aimed F/M  
206 ratio. The final volume of the mixture was made up to 600 mL by adding distilled water. The  
207 initial pH was adjusted once, initially with 1 M HCl and 1 M NaOH prior to the start of the  
208 tests.

209

### 210 **2.3.2 Effect of alkaline substrate pre-treatment on H<sub>2</sub> yield**

211 Direct conversion of lignocellulosic biomass to biohydrogen is often limited due to their low  
212 biodegradability (Monlau et al., 2012; Pan et al., 2010). Biological hydrolysis is one of the  
213 limiting factors in DF. The evaluation of the effect of alkaline pre-treatment on H<sub>2</sub> yields was  
214 performed on rice straw. This study investigated an alkaline pre-treatment with 4 % NaOH (4  
215 g/100g TS) and 8 % NaOH (8 g/100g TS) at a solid liquid ratio of 1:5 (w/v). This mixture  
216 was kept at  $55 (\pm 2)$  °C for 24 hours in a one-liter borosilicate glass bottle (Simax, Czech  
217 Republic). The results were compared with untreated rice straw at thermophilic DF using 200  
218 g of heat-treated WAS as inoculum. The concentration of rice straw was 45 gTS/L and the

219 initial pH was adjusted to 6.5 during the batch tests that gave the optimal dark fermentative  
220 H<sub>2</sub> performance for rice straw as reported by Chen et al. (2012).

### 221 **2.3.3 Effect of inoculum sources on H<sub>2</sub> yield**

222 Heat shocked WAS and ADS was used as inoculum in a DF of OMWW carried out in batch  
223 tests and operated under thermophilic conditions ( $55 \pm 2^\circ\text{C}$ ). The F/M ratio was fixed at  
224 approximately 1 gVS substrate/gVS inoculum in all sets of batch tests using 200 g of  
225 OMWW and a respective volume of ADS and WAS. The initial pH was adjusted to pH 6.0 in  
226 all experiments.

227

### 228 **2.4 Analytical methods**

229 Hydrogen was quantified with a gas chromatograph (VARIAN STAR 3400, USA) equipped  
230 with a ShinCarbon ST 80/100 column and a thermal conductivity detector. Argon was used  
231 as carrier gas with a front and rear end pressure of 20 psi. The duration of analysis was 14  
232 minutes. The gas volume was measured with a volumetric displacement method. The biogas  
233 was passed through acidic water (1.5 % HCl) and the volume was quantified by water  
234 displacement (Ghimire et al., 2015c). The volume of hydrogen was calculated from the gas  
235 composition. Fermentation end products (lactic, acetic, propionic and butyric acids) were  
236 quantified by High Pressure Liquid Chromatography (HPLC) (Chromatography Oven LC 25  
237 Model, Dionex, USA) equipped with a Synergi 4u Hydro RP 80A (size 250×4.60mm)  
238 column and an UV detector (AD25 Model, Dionex, USA). Gradient elution consisted of 20%  
239 methanol, 10% acetonitrile in 5 mM H<sub>2</sub>SO<sub>4</sub> pumped at a rate of 0.9 mL/min by using a  
240 gradient pump (GP 50 Model, Dionex, USA). The elution time was 18.5 minutes. Ethanol  
241 and caproic acid were determined with an Aminex HPX-87H column (300 mm on 7,8 mm,  
242 Bio-rad), using 5 mM H<sub>2</sub>SO<sub>4</sub> as an eluent at a flow rate of 0.4 mL/min. pH was measured  
243 with a pH meter (WTW, inolab, pH level 2). The COD of the food waste was measured as

244 reported by Noguerol-Arias et al. (2012). The total lipid content was measured by the Bligh  
245 and Dyer chloroform/methanol total lipid extraction method (Bligh and Dyer, 1959). TS and  
246 VS concentrations were determined by the Method 2540 (Part 2000), alkalinity by titration  
247 (Method 2320, Part 2000) and TKN by macro-Kjeldahl (Method 4500-N<sub>org</sub>, Part 4000) as  
248 described in the Standard Methods (APHA, 2005).

249

## 250 **2.5 Measurements and data analysis**

251 The biogas accumulated in the reactors was measured daily, except at the starting period of  
252 the experiments, i.e. 1-3 days, where it was measured twice a day, until the H<sub>2</sub> production  
253 completely ceased. The biogas volumes were normalized at 0 °C and 1 atm (NmL) and  
254 reported as a daily average. The average values were considered for the evaluations, while the  
255 data range based on the duplicate samples is provided and indicated by “±”. H<sub>2</sub> yields were  
256 calculated by dividing the final cumulative recovery of H<sub>2</sub> by the amount of VS added at the  
257 start of the experiment.

258

259 De Gioannis et al. (2013) defined a parameter “t<sub>95</sub>” as the time required to achieve 95% of the  
260 maximum H<sub>2</sub> yield. This parameter was used to compare the kinetics associated to the  
261 different batch tests, and to evaluate the effect of the experimental conditions.

$$t_{95} = \frac{H_o}{R \cdot e} (1 - \ln(-\ln 0.95)) + \lambda \quad (1)$$

$$H(t) = H_o \cdot \exp \left\{ -\exp \left[ \frac{R \cdot e}{H_o} \right] (\lambda - t) + 1 \right\} \quad (2)$$

262 Equation (1) corresponds to a rearranged form of the modified Gompertz equation (2), that  
263 has been widely used to model biohydrogen production kinetics (Gadhamshetty et al., 2010;  
264 Wang and Wan, 2009). This empirical formula gives biohydrogen production trends and  
265 includes five major parameters: i) cumulative biohydrogen production (or potential) (H<sub>o</sub>,

266 mL/g VS), ii) biohydrogen production rate (R, mL/h), iii)  $e$  is 2.71828, iv) lag time ( $\lambda$ , hours)  
267 and v) total cultivation time (t, hours). The cumulative biohydrogen production is a non-  
268 linear curve and in the present study, the parameters  $H_0$ , R and  $\lambda$  were estimated using the  
269 Curve Fitting Toolbox in MATLAB<sup>®</sup> (Version MATLAB R2012b, Curve Fitting Toolbox  
270 3.3) with an associated 95% confidence limit. The total cumulative production, hydrogen  
271 production rates and lag phase time were used as parameters to compare the characteristics of  
272 the biohydrogen production systems. R software (OSX version 3.1.3) with the package  
273 Rcmdr (OSX version 2.1.7) was used for the statistical analysis of data obtained from the  
274 experiments. The  $p$  value was set at 0.05 and the significance of the results tested with  $p$   
275 values: \* < 0.05; \*\* < 0.01; \*\*\* < 0.001; while not significant results were with  $p > 0.05$ .

276

### 277 **3. Results**

#### 278 **3.1 Effect of the initial pH and combined effect of F/M ratio and pH on H<sub>2</sub> yields**

279 The H<sub>2</sub> yields and the time required to achieve 95% of the maximum H<sub>2</sub> yield were plotted  
280 against the initial pH values (Fig. 1). The H<sub>2</sub> yields showed a decreasing trend to the  
281 increasing pH. Fig. 1 confirmed that H<sub>2</sub> production was favoured at the acidic pH range, i.e.  
282 at initial pH 4.5 and 5.0 with H<sub>2</sub> yields of 60.6 ( $\pm$  9.0) and 50.7 ( $\pm$  1.0) N mL H<sub>2</sub>/g VS,  
283 respectively. This result is in agreement with the study reported by Khanal et al. (2004). The  
284 fermentative H<sub>2</sub> production patterns at the various pH values investigated are described by a  
285 modified Gompertz equation, as presented in Table 3 (Modeled plot is provided in  
286 Supplementary information S1). The different initial pH values in the tests were characterized  
287 by the differences shown in cumulative H<sub>2</sub> production, H<sub>2</sub> production rates and lag phase  
288 (Table 3). H<sub>2</sub> production rates (R, mL/h) were high at initial pH 7.0, however, higher rates  
289 were not co-related with higher H<sub>2</sub> yields (Fig. 1 and Table 3).

290

291 Unsurprisingly, the lag phase decreased when increasing the initial pH, which represents the  
292 time required for spore forming H<sub>2</sub> producers present in heat-treated ADS to germinate or  
293 adapt a sudden change of their environment (Ferchichi et al., 2005; Kim et al., 2011). Fig. 1  
294 shows the time required to achieve 95% of the maximum H<sub>2</sub> yield decreased by increasing  
295 the initial pH, while the rate of H<sub>2</sub> production was higher at initial pH 7.0 (Table 3). H<sub>2</sub>  
296 production started faster at higher pH and lasted for a short time while it continued for longer  
297 time during the tests at lower pH. Thus, a decreasing lag phase did not correspond to an  
298 increase in H<sub>2</sub> yields. This can be explained by the methanogenic activities which started at  
299 higher initial pH, that was confirmed by the presence of methane in the biogas produced  
300 when H<sub>2</sub> production ceased completely. The final pH at the end of the tests was mainly lower  
301 than the initial pH (Table 3), which is mainly due to the production of VFAs (Table 3). As  
302 exception, the final pH in the batch tests with initial pH 4.5 was higher than the initial pH  
303 (Table 3), which could be due to the higher alkalinity of the inoculum (ADS) and the lower  
304 substrate concentration (F/M 0.5) used to avoid the use of chemical buffer. The final pH in all  
305 the tests were lower than 5.5, except for tests with initial pH 7.0 where the final pH was 6.6.  
306 This can be due to the higher alkalinity (buffering capacity) of the ADS inoculum (Table 1).  
307  
308 The concentrations of the main accumulated metabolites at the end of the tests are  
309 summarised in Table 3. Results confirm that different fermentation pathways occurred. The  
310 presence of propionate and ethanol generally does not indicate H<sub>2</sub> favorable pathways (Kim  
311 et al., 2011). The concentration of ethanol was comparatively higher in the tests with initial  
312 pH range 6.0 – 7.0, that could be linked to the low H<sub>2</sub> yields. In particular, the butyric to  
313 acetic acid ratio (B/A, mM:mM) co-related with the H<sub>2</sub> yields (Fig. 2). This observation is  
314 consistent with a study by Kim et al. (2006), which reported a higher correlation between B/A  
315 ratios (1.6 – 9.3) and H<sub>2</sub> yields. However, this ratio might not always give a good indication

316 of high H<sub>2</sub> production. Guo et al. (2013) reported that the homoacetogenic activities can  
317 influence the concentration of end-metabolites due to acetate production from H<sub>2</sub> and CO<sub>2</sub>.  
318 The presence of acetate in higher concentrations between pH 5.5 – 7.0 might indicate the  
319 prevalence of an homoacetogenic activity responsible of lower H<sub>2</sub> yields.

320

321 The results of the batch tests carried out at F/M ratios 0.5, 1.0 and 1.5 at two initial pH values  
322 (5.0 and 6.5) are presented in Table 4. Table 4 shows the major metabolites accumulated at  
323 the end of the tests. At the initial pH 5.0 and F/M ratios of 0.5, 1.0 and 1.5, H<sub>2</sub> yields were  
324 50.7 (± 0.8), 60.3 (± 5.0) and 49.3 (± 12.2) mL H<sub>2</sub>/g VS, respectively. Likewise, in tests  
325 carried out with an initial pH 6.5, respective H<sub>2</sub> yields of 28.2 (± 4.2), 43.2 (± 2.0) and 54.1  
326 (± 4.4) mL H<sub>2</sub>/g VS were obtained. An ANOVA analysis confirmed the significance of  
327 difference in H<sub>2</sub> yields at pH 5.0 and 6.5 for an F/M ratio of 0.5 (*p* value <0.05). However, it  
328 was not significant for F/M ratios 1.0 and 1.5 at both initial pH values tested. Likewise, at  
329 initial pH 5.0, the differences in H<sub>2</sub> yields were not significant for all the three tested F/M  
330 ratios. Interestingly, the differences in H<sub>2</sub> yields were significant (*p* value <0.05) at an initial  
331 pH of 6.5 for F/M ratios 0.5 and 1.5. This implies a combined influence of the F/M ratios and  
332 initial pH on dark fermentative H<sub>2</sub> production. The result also suggests that the comparable  
333 H<sub>2</sub> yields can be achieved through a combination of pH and F/M ratios by maximizing the  
334 utilization of substrates.

335

336 The different metabolites yields measured at the end of the batch tests explain the differences  
337 in H<sub>2</sub> yields (Table 4). The presence of different metabolites suggests a typical mixed type  
338 fermentation that can occur in complex substrates like food waste. Acetate yields were higher  
339 at initial pH 6.5 compared to pH 5.0, which was also confirmed in the tests carried out earlier  
340 at different initial pH (Table 3). Similarly, higher ethanol yields were obtained at increasing

341 F/M ratios and initial pH. High levels of butyrate yield at pH 6.5 and F/M ratios 1.0 and 1.5  
342 can be associated to higher H<sub>2</sub> yields obtained in respective tests, as the production of  
343 butyrate is generally co-related to H<sub>2</sub> production (Kim et al., 2011).

344

### 345 **3.2 Effect of alkaline substrate pre-treatment on H<sub>2</sub> yields**

346 Fig. 3 shows the effects of alkaline substrate pre-treatment on biohydrogen production. The  
347 results illustrate that biohydrogen production can be significantly improved with alkaline pre-  
348 treatment of rice straw. As expected, the alkaline pre-treatment enhanced the saccharification  
349 of sugars from rice straw, which increased along with the concentration of NaOH. The COD  
350 values of hydrolysate after pre-treatment with 4% and 8% NaOH were 7.3 ( $\pm$  0.8) and 8.3 ( $\pm$   
351 0.7) g/L respectively in comparison to the untreated rice straw with 3.8 ( $\pm$  0.1) g/L soluble  
352 COD (determined with solid liquid ratio of 1:5). The results of end-product accumulation  
353 (Table 5) show that higher H<sub>2</sub> yields corresponded to higher B/A ratios (mM:mM),  
354 irrespective of the concentration of acids accumulated at the end of the tests.

355

### 356 **3.3 Effect of inoculum sources on H<sub>2</sub> yields**

357 The cumulative H<sub>2</sub> yields and accumulation of end metabolites during the application of two  
358 heat treated inoculum sources on biohydrogen production from OMWW is depicted in Fig. 4  
359 and Table 6, respectively. The differences observed when using two inoculum types, i.e. ADS  
360 and WAS, at thermophilic temperature gave an indication of the level of inhibition of the  
361 polyphenols present in the OMWW on the microorganisms (Hamdi, 1992; Paraskeva and  
362 Diamadopoulos, 2006). The initial lag phase observed in Fig. 4 can give evidence for the  
363 adaptation of H<sub>2</sub> producing fermentative microbial communities to phenolic compounds  
364 present in OMWW. The maximum H<sub>2</sub> yield from OMWW with WAS was almost 2 fold  
365 higher than with ADS. In addition, WAS sludge required less heat-shock pre-treatment time

366 to inhibit hydrogen consuming methanogens and showed a shorter lag phase (Fig. 4, Table 6).  
367 This shows that heat-shocked WAS is an appropriate inoculum for DF of OMWW for higher  
368 H<sub>2</sub> recovery.

369

370 The lower H<sub>2</sub> yield obtained from OMWW in tests inoculated with ADS is further supported  
371 by the analysis of the metabolic pathways (Table 6), which showed an accumulation of lactic  
372 acid. Metabolic pathways leading to lactic acid are not favorable to H<sub>2</sub> production (Hawkes et  
373 al., 2007), which explains the lower H<sub>2</sub> yields observed in the batch tests inoculated with  
374 ADS. Likewise, the higher levels of acetate in the tests carried out with WAS than ADS can  
375 explain the higher H<sub>2</sub> yields from OMWW, as acetate pathways generally yields to more H<sub>2</sub>  
376 per mole of glucose than the butyrate pathways (Hawkes et al., 2007).

377

## 378 **4. Discussion**

### 379 **4.1 Effect of the pH and F/M ratio on H<sub>2</sub> yield**

380 This study showed that higher H<sub>2</sub> yields can be achieved from easily biodegradable organic  
381 waste like food waste, when compared to other complex substrates such as rice straw (Table  
382 7). This is mainly a result of the high fraction of easily degradable carbohydrates contained in  
383 food waste, as already suggested by Guo et al. (2013). The combination of initial pH and  
384 substrate concentration is important to avoid inhibition of H<sub>2</sub> producers through elevated  
385 VFA accumulation and consequent pH depletion, and high hydrogen partial pressure (Ginkel  
386 et al., 2001). This is likely the case of substrates like food waste which generally show faster  
387 hydrolysis kinetics compared to lignocellulosic biomass such as rice straw (Table 7), that  
388 requires higher optimal substrate concentrations or F/M ratios compared to food waste.

389

390 Table 7 compares the results of the H<sub>2</sub> yields observed in this study with literature data  
391 reported under similar conditions. The highest H<sub>2</sub> yields observed at initial pH 4.5 and 5.0  
392 (60.6 ± 9 and 50.7 ± 1 mL H<sub>2</sub>/ g VS food waste, respectively) in this study were in contrast  
393 with Cappai et al. (2014), who obtained the highest H<sub>2</sub> yield (56.2 mL H<sub>2</sub>/ g VS food waste)  
394 at pH 6.5. This difference in optimum initial pH might be due to the higher substrate  
395 concentrations used by Cappai et al. (2014) (Table 7). Furthermore, two possible  
396 explanations can be given for the relationship between initial pH (4.5 and 5.0) and the higher  
397 H<sub>2</sub> production: (i) a selection of hydrogen producers at pH range (4.5 – 5.0) and (ii) an  
398 inhibition of H<sub>2</sub> consuming methanogens. In addition, the differences in metabolic products  
399 accumulating at different initial pH ranges might support the growth of different microbial  
400 communities which can influence the H<sub>2</sub> production as reported in the studies from Fang  
401 and Liu (2002) and Lee et al. (2008). Khanal et al. (2004) reported that a microbial shift to  
402 solventogenesis did not occur at a pH range 4.5 – 6.5, which provides further evidence of the  
403 importance of the initial microbial community and pH to reach higher H<sub>2</sub> yields. In addition,  
404 native microbial organisms present in the food waste might also influence the DF process in  
405 real conditions (waste type and storing conditions). In this study, the storage of food waste at  
406 freezing conditions might have impacted native microorganisms. Nevertheless, the  
407 comparison of the results between the tests operated at different initial pH remains unaffected  
408 as uniform substrates were used.

409

410 At lower F/M ratios (0.5 and 1.0), an initial of pH 5.0 favored the H<sub>2</sub> production whereas it  
411 was the inverse at a F/M ratio 1.5 and initial pH 6.5. At the initial of pH 5.0 and F/M 1.5, a  
412 lower H<sub>2</sub> yield was observed, which might be due to the shock load on the microbial systems.  
413 This was also confirmed in the study of Ginkel et al. (2001), who reported an inhibition of H<sub>2</sub>  
414 production at higher substrate loading rates due to shock loads. The conversion of substrates

415 to metabolic products at pH 5.0 and F/M 1.5 is lower than at F/M ratios 0.5 and 1.0, which  
416 can be due to an inhibition of the substrate conversion. In addition, a low final pH ( $4.5 \pm 0.1$ )  
417 at the end of the test at pH 5.0 and F/M 1.5 (Table 4) suggests that H<sub>2</sub> production might be  
418 inhibited due to a 'load shock'. This can be supported by the time required to achieve 95% of  
419 the maximum H<sub>2</sub> yield ( $t_{95} = 47$  days) (Table 4). Pan et al. (2008) reported that a F/M ratio of  
420 6.0 as appropriate for thermophilic ( $50 \pm 2$  °C) fermentation of food waste (Table 7).  
421 However, the initial pH in their study varied from 6.2 to 6.7. Therefore, in the DF systems  
422 where initial pH is not buffered, H<sub>2</sub> production is a combined function of suitable F/M ratio  
423 and initial pH. Likewise, an optimal operational pH range could be maintained through  
424 subsequent substrate feeding strategies which can guarantee higher H<sub>2</sub> production and avoid  
425 the H<sub>2</sub> consuming activities i.e. methanogens and homoacetogens.

426

#### 427 **4.2 Effect of alkaline substrate pre-treatment on H<sub>2</sub> yield**

428 The alkaline pre-treatment method applied in this study aimed at improving hydrolysis and  
429 solubilization of the organic matter that limit the dark fermentative substrate conversion  
430 (Monlau et al., 2015, 2013b). However, the level of effectiveness of the different pre-  
431 treatment methods depends on the nature of the substrate (Ariunbaatar et al., 2014; Carlsson  
432 et al., 2012). In the study of Monlau et al. (2013c), H<sub>2</sub> yields from sunflower stalks increased  
433 from 2.3 ( $\pm 0.9$ ) to 4.4 ( $\pm 2.6$ ) mL H<sub>2</sub>/g VS, while in our study an increase from 0.3 ( $\pm 0.1$ ) to  
434 6.6 ( $\pm 0.1$ ) mL H<sub>2</sub>/g VS from rice straw as the substrate was achieved under similar  
435 conditions of thermo-alkaline pre-treatment (Fig. 3 and Table 7). Meanwhile, H<sub>2</sub> yields  
436 further increased to 15.7 ( $\pm 1.0$ ) mL H<sub>2</sub>/g VS when 8 % w/w NaOH was applied (Fig. 3). This  
437 H<sub>2</sub> yield is lower than the value reported by Chen et al. (2012) with untreated rice straw, i.e.  
438 24.8 mL/g TS at a substrate concentration of 90 g TS/L, whereas, it is 2.2 fold higher when  
439 the substrate concentration was 30 g TS/L (i.e. 7.1 mL H<sub>2</sub>/g TS). This disagreement might be

440 due to physico-chemical properties of the lignocellulosic substrates, such as particle sizes,  
441 soluble carbohydrates content and/or substrate concentration (Monlau et al., 2013a). Chen et  
442 al. (2012) reported an increasing trend of H<sub>2</sub> yields, when the particle size of rice straw  
443 decreased from 10 mm to < 0.297 mm. In their study, a maximum H<sub>2</sub> yield was obtained with  
444 a particle size of < 0.297 mm (6.4 mL H<sub>2</sub>/g TS) at a substrate concentration of 30 g TS/L.

445

446 The effects of the chemical agents applied (NaOH) and or by-products formed (furfural,  
447 phenols) during the pre-treatment process and the response on the dark fermentative  
448 microbial community should be taken into consideration while selecting appropriate pre-  
449 treatment method. Kim et al. (2009) reported a decrease in H<sub>2</sub> yields when the Na<sup>+</sup>  
450 concentration in a continuous DF reactor gradually increased from 0.27 to 21.00 g Na<sup>+</sup>/L  
451 while the acclimatized fermentative community maintained their activity up to 6.00 g Na<sup>+</sup>/L.  
452 Nonetheless, in this study, the H<sub>2</sub> yields increased when 8 % w/w NaOH was applied  
453 compared to 4 % w/w NaOH (Fig. 3). Moreover, under similar pre-treatment conditions, 12  
454 % w/w NaOH (i.e. 5.40 g Na<sup>+</sup>/L) might either enhance the H<sub>2</sub> yields or exert effect on  
455 fermentative microbial community, depending on the inocula type and adaptation to Na<sup>+</sup>  
456 concentration. However, the application of pre-treatment methods should be based on the  
457 substrate type (biodegradability or bioavailability of easily fermentable carbohydrates), their  
458 practicability and economy viability.

459

#### 460 **4.3 Effect of inocula on H<sub>2</sub> yield**

461 The application of two different inoculum types for the DF of OMWW showed differences in  
462 response of ADS and WAS in terms of dark fermentative conversion to H<sub>2</sub> and other  
463 metabolites (Fig. 4 and Table 6). Comparatively, WAS exhibited better performances in  
464 terms of H<sub>2</sub> production as shown by the H<sub>2</sub> production yields and kinetics in Table 6. The

465 difference in H<sub>2</sub> yields might be a result of the effect of polyphenolic substances present in  
466 OMWW (total phenols in Table 1) on the fermentative communities present in ADS and  
467 WAS (Hamdi, 1992; Ntaikou et al., 2009). Ntaikou et al. (2009) used diluted OMWW to  
468 avoid growth inhibition, whereas, Hamdi (1992) observed an inhibition mainly on  
469 methanogens. Nonetheless, the difference in response of the two inocula could be also due to  
470 the difference in heat shock treatment time applied during the HST. ADS required a longer  
471 HST time to inhibit the activity of methanogens (Ghimire et al., 2015b) compared to WAS  
472 which has an aerobic origin. Therefore, the treatment time could have impacted the microbial  
473 communities that could contribute to fermentative H<sub>2</sub> production.

474

475 The use of WAS as better inoculum is supported by the studies of Chen et al. (2012) and Kim  
476 et al. (2011). Chen et al. (2012) achieved higher H<sub>2</sub> yields with a sludge originated from a  
477 municipal wastewater treatment plant when compared with other inoculum sources like cow  
478 dung, compost and paper mill sludge. The group attributed higher H<sub>2</sub> yields to the presence of  
479 a potential hydrolytic and fermentative bacterial microbial community. Kim et al. (2011)  
480 hypothesized that such increase in H<sub>2</sub> yields from sewage sludge addition was due to the  
481 presence of iron (Fe), calcium (Ca) and phosphorous (P) at much higher concentrations (no  
482 information on speciation was given). Further research on the nutrient and trace metal  
483 content in inocula and how these affect the DF rates is thus required.

484

485 The selection and application of various optimum operational parameters depends highly on  
486 the type of substrate, i.e. mainly its biodegradability. However, the improvement of dark  
487 fermentative H<sub>2</sub> production should bear the cost of application of different optimal  
488 operational parameters in terms of net energy and economy gain. It should be taken into  
489 consideration that DF of waste biomass is not a complete conversion of organic waste, i.e.

490 organic acids and alcohols accumulate in the effluent, for which a subsequent treatment needs  
491 to be provided. Valorization of these by-products can support the costs associated with the  
492 optimization of the DF process. Several studies have suggested the integration of DF with  
493 processes such as photofermentation ( $H_2$ ), bioelectrochemical systems ( $H_2$ ) and anaerobic  
494 digestion ( $CH_4$ ) for further energy recovery and production of platform molecules of  
495 economic interest, such as biopolymers (Bastidas-Oyanedel et al., 2015; ElMekawy et al.,  
496 2014; Ghimire et al., 2015c; Xia et al., 2013).

497

## 498 **5. Conclusion**

499 This study aimed to investigate the optimal operational parameters in the thermophilic DF of  
500 three types of complex wastes biomass with varying biodegradability, i.e. food waste, rice  
501 straw and OMWW. The DF applied to food waste was favored in the acidic pH range (4.5-  
502 5.0), though an appropriate substrate concentration that must be considered while selecting an  
503 acidic pH range. F/M ratios of 0.5 and 1.0 at an initial pH of 5.0 gave, respectively, 1.8 and  
504 1.4 folds higher  $H_2$  yields than at initial pH 6.5. Likewise, F/M ratios and pH can be  
505 optimized to achieve higher substrate utilization and  $H_2$  yields. During the tests, higher B/A  
506 ratios (mM:mM) were associated with higher  $H_2$  yields, a B/A ratio equivalent to 1.5 was  
507 related to the optimal  $H_2$  yield. Similarly, pre-treatment of rice straw with 4% NaOH and 8%  
508 NaOH at 55 °C for 24 hours increased the  $H_2$  yield by 26 and 57 fold, respectively.  
509 Furthermore, WAS showed adaptability to OMWW containing phenols and gave a nearly 2  
510 fold higher  $H_2$  yield when compared to ADS. In conclusion, the selection and application of  
511 optimal operational parameters for the optimization of  $H_2$  production rely mainly on the  
512 substrate biodegradability. Therefore, these parameters should be optimized for each  
513 particular type of substrate prior to further application in scaled-up DF systems.

514

515 **Acknowledgements**

516 This research was supported by the Project “Modular photo-biologic reactor for bio-  
517 hydrogen: application to dairy waste – RE-MIDA” by the Agriculture Department of the  
518 Campania Region in the context of the Programme of Rural Development 2007-2013,  
519 Measure 124” and the Erasmus Mundus Joint Doctorate Programme ETeCoS<sup>3</sup>  
520 (Environmental Technologies for Contaminated Solids, Soils and Sediments) under the EU  
521 grant agreement FPA No 2010-0009.

522

523 **Reference**

- 524 Abreu, A.A.A., Danko, A.S.S., Costa, J.C.C., Ferreira, E.C.C., Alves, M.M.M., 2009.  
525 Inoculum type response to different pHs on biohydrogen production from l-arabinose, a  
526 component of hemicellulosic biopolymers. *Int. J. Hydrogen Energy* 34, 1744–1751.  
527 doi:10.1016/j.ijhydene.2008.12.020
- 528 Alibardi, L., Cossu, R., 2015. Effects of carbohydrate, protein and lipid content of organic  
529 waste on hydrogen production and fermentation products. *Waste Manag.*  
530 doi:10.1016/j.wasman.2015.07.049
- 531 American Public Health Association (APHA), 2005. *Standard Methods for the Examination*  
532 *of Water and Wastewater*, 21st ed. American Public Health Association Water Works  
533 Association, American Water Environment Federation, Washington DC.
- 534 Ariunbaatar, J., Panico, A., Esposito, G., Pirozzi, F., Lens, P.N.L., 2014. Pretreatment  
535 methods to enhance anaerobic digestion of organic solid waste. *Appl. Energy* 123, 143–  
536 156. doi:10.1016/j.apenergy.2014.02.035
- 537 Bastidas-Oyanedel, J.-R., Bonk, F., Thomsen, M.H., Schmidt, J.E., 2015. Dark fermentation  
538 biorefinery in the present and future (bio)chemical industry. *Rev. Environ. Sci.*  
539 *Bio/Technology*. doi:10.1007/s11157-015-9369-3
- 540 Bellucci, M., Botticella, G., Francavilla, M., Beneduce, L., 2015. Inoculum pre-treatment  
541 affects the fermentative activity of hydrogen-producing communities in the presence of  
542 5-hydroxymethylfurfural. *Appl. Microbiol. Biotechnol.* 89–91. doi:10.1007/s00253-015-  
543 7002-6
- 544 Bligh, E.G., Dyer, W.J., 1959. A rapid method of total lipid extraction and purification. *Can.*  
545 *J. Biochem. Physiol.* 37, 911–917.
- 546 Cappai, G., De Gioannis, G., Friargiu, M., Massi, E., Muntoni, A., Poletti, A., Pomi, R.,  
547 Spiga, D., 2014. An experimental study on fermentative H<sub>2</sub> production from food waste  
548 as affected by pH. *Waste Manag.* 34, 1510–1519. doi:10.1016/j.wasman.2014.04.014
- 549 Carlsson, M., Lagerkvist, A., Morgan-Sagastume, F., 2012. The effects of substrate pre-  
550 treatment on anaerobic digestion systems: a review. *Waste Manag.* 32, 1634–50.  
551 doi:10.1016/j.wasman.2012.04.016
- 552 Chen, C.-C., Chuang, Y.-S., Lin, C.-Y., Lay, C.-H., Sen, B., 2012. Thermophilic dark

- 553 fermentation of untreated rice straw using mixed cultures for hydrogen production. *Int.*  
554 *J. Hydrogen Energy* 37, 15540–15546. doi:10.1016/j.ijhydene.2012.01.036
- 555 De Gioannis, G., Friargiu, M., Massi, E., Muntoni, A., Poletini, A., Pomi, R., Spiga, D.,  
556 2014. Biohydrogen production from dark fermentation of cheese whey: Influence of pH.  
557 *Int. J. Hydrogen Energy* 39, 20930–20941. doi:10.1016/j.ijhydene.2014.10.046
- 558 De Gioannis, G., Muntoni, A., Poletini, A., Pomi, R., 2013. A review of dark fermentative  
559 hydrogen production from biodegradable municipal waste fractions. *Waste Manag.* 33,  
560 1345–61. doi:10.1016/j.wasman.2013.02.019
- 561 ElMekawy, A., Srikanth, S., Vanbroekhoven, K., De Wever, H., Pant, D., 2014. Bioelectro-  
562 catalytic valorization of dark fermentation effluents by acetate oxidizing bacteria in  
563 bioelectrochemical system (BES). *J. Power Sources* 262, 183–191.  
564 doi:10.1016/j.jpowsour.2014.03.111
- 565 Fang, H.H.P., Liu, H., 2002. Effect of pH on hydrogen production from glucose by a mixed  
566 culture. *Bioresour. Technol.* 82, 87–93.
- 567 Ferchichi, M., Crabbe, E., Gil, G.-H., Hintz, W., Almadidy, A., 2005. Influence of initial pH  
568 on hydrogen production from cheese whey. *J. Biotechnol.* 120, 402–9.  
569 doi:10.1016/j.jbiotec.2005.05.017
- 570 Fernandes, T. V., Bos, G.J.K., Zeeman, G., Sanders, J.P.M., van Lier, J.B., 2009. Effects of  
571 thermo-chemical pre-treatment on anaerobic biodegradability and hydrolysis of  
572 lignocellulosic biomass. *Bioresour. Technol.* 100, 2575–9.  
573 doi:10.1016/j.biortech.2008.12.012
- 574 Gadhamshetty, V., Arudchelvam, Y., Nirmalakhandan, N., Johnson, D.C., 2010. Modeling  
575 dark fermentation for biohydrogen production: ADM1-based model vs. Gompertz  
576 model. *Int. J. Hydrogen Energy* 35, 479–490. doi:10.1016/j.ijhydene.2009.11.007
- 577 Ghimire, A., Frunzo, L., Pirozzi, F., Trably, E., Escudie, R., Lens, P.N.L., Esposito, G.,  
578 2015a. A review on dark fermentative biohydrogen production from organic biomass:  
579 Process parameters and use of by-products. *Appl. Energy* 144, 73–95.  
580 doi:10.1016/j.apenergy.2015.01.045
- 581 Ghimire, A., Frunzo, L., Salzano, E., Panico, A., Lens, P.N.L., Pirozzi, F., 2015b. Biomass  
582 Enrichment and Scale-up Implications for Dark Fermentation Hydrogen Production with  
583 Mixed Cultures. *Chem. Eng. Trans.* 43, 391–396. doi:10.3303/CET1543066
- 584 Ghimire, A., Valentino, S., Frunzo, L., Trably, E., Escudié, R., Pirozzi, F., Lens, P.N.L.,  
585 Esposito, G., 2015c. Biohydrogen production from food waste by coupling semi-  
586 continuous dark-photofermentation and residue post-treatment to anaerobic digestion: A  
587 synergy for energy recovery. *Int. J. Hydrogen Energy* 40(46), 16045–16055.  
588 doi:10.1016/j.ijhydene.2015.09.117
- 589 Ginkel, S. V., Sung, S., Lay, J.J., 2001. Biohydrogen production as a function of pH and  
590 substrate concentration. *Environ. Sci. Technol.* 35, 4726–4730.
- 591 Guo, X.M., Trably, E., Latrille, E., Carrere, H., Steyer, J., 2013. Predictive and explicative  
592 models of fermentative hydrogen production from solid organic waste: Role of butyrate  
593 and lactate pathways. *Int. J. Hydrogen Energy* 39, 1–10.  
594 doi:10.1016/j.ijhydene.2013.08.079
- 595 Guo, X.M., Trably, E., Latrille, E., Carrère, H., Steyer, J.-P., 2010. Hydrogen production  
596 from agricultural waste by dark fermentation: A review. *Int. J. Hydrogen Energy* 35,

- 597 10660–10673. doi:10.1016/j.ijhydene.2010.03.008
- 598 Hallenbeck, P.C., Ghosh, D., Skonieczny, M.T., Yargeau, V., 2009. Microbiological and  
599 engineering aspects of biohydrogen production. *Indian J. Microbiol.* 49, 48–59.  
600 doi:10.1007/s12088-009-0010-4
- 601 Hamdi, M., 1992. Toxicity and biodegradability of olive mill wastewaters in batch anaerobic  
602 digestion. *Appl. Biochem. Biotechnol.* 37, 155–163. doi:10.1007/BF02921667
- 603 Hawkes, F., Hussy, I., Kyazze, G., Dinsdale, R., Hawkes, D., 2007. Continuous dark  
604 fermentative hydrogen production by mesophilic microflora: Principles and progress.  
605 *Int. J. Hydrogen Energy* 32, 172–184. doi:10.1016/j.ijhydene.2006.08.014
- 606 Kapdan, I.K., Kargi, F., 2006. Bio-hydrogen production from waste materials. *Enzyme*  
607 *Microb. Technol.* 38, 569–582. doi:10.1016/j.enzmictec.2005.09.015
- 608 Khanal, S., Chen, W.H., Li, L. and Sung, S., 2004. Biological hydrogen production: effects of  
609 pH and intermediate products. *Int. J. Hydrogen Energy* 29, 1123–1131.  
610 doi:10.1016/j.ijhydene.2003.11.002
- 611 Kim, D.-H., Kim, S.-H., Jung, K.-W., Kim, M.-S., Shin, H.-S., 2011. Effect of initial pH  
612 independent of operational pH on hydrogen fermentation of food waste. *Bioresour.*  
613 *Technol.* 102, 8646–52. doi:10.1016/j.biortech.2011.03.030
- 614 Kim, D.-H., Kim, S.-H., Shin, H.-S., 2009. Sodium inhibition of fermentative hydrogen  
615 production. *Int. J. Hydrogen Energy* 34, 3295–3304. doi:10.1016/j.ijhydene.2009.02.051
- 616 Kim, D.-H.H., Kim, S.-H.H., Kim, H.-W.W., Kim, M.-S.S., Shin, H.-S.S., 2011. Sewage  
617 sludge addition to food waste synergistically enhances hydrogen fermentation  
618 performance. *Bioresour. Technol.* 102, 8501–8506. doi:10.1016/j.biortech.2011.04.089
- 619 Kim, S.-H., Han, S.-K., Shin, H.-S., 2006. Effect of substrate concentration on hydrogen  
620 production and 16S rDNA-based analysis of the microbial community in a continuous  
621 fermenter. *Process Biochem.* 41, 199–207. doi:10.1016/j.procbio.2005.06.013
- 622 Lee, Z.-K., Li, S.-L., Lin, J.-S., Wang, Y.-H., Kuo, P.-C., Cheng, S.-S., 2008. Effect of pH in  
623 fermentation of vegetable kitchen wastes on hydrogen production under a thermophilic  
624 condition. *Int. J. Hydrogen Energy* 33, 5234–5241. doi:10.1016/j.ijhydene.2008.05.006
- 625 Monlau, F., Barakat, A., Trably, E., Dumas, C., Steyer, J.-P., Carrère, H., 2013a.  
626 Lignocellulosic Materials Into Biohydrogen and Biomethane: Impact of Structural  
627 Features and Pretreatment. *Crit. Rev. Environ. Sci. Technol.* 43, 260–322.
- 628 Monlau, F., Kaparaju, P., Trably, E., Steyer, J.P., Carrere, H., 2015. Alkaline pretreatment to  
629 enhance one-stage CH<sub>4</sub> and two-stage H<sub>2</sub>/CH<sub>4</sub> production from sunflower stalks: Mass,  
630 energy and economical balances. *Chem. Eng. J.* 260, 377–385.  
631 doi:10.1016/j.cej.2014.08.108
- 632 Monlau, F., Sambusiti, C., Barakat, A., Guo, X.M., Latrille, E., Trably, E., Steyer, J.-P.,  
633 Carrere, H., 2012. Predictive models of biohydrogen and biomethane production based  
634 on the compositional and structural features of lignocellulosic materials. *Environ. Sci.*  
635 *Technol.* 46, 12217–25. doi:10.1021/es303132t
- 636 Monlau, F., Trably, E., Barakat, A., Hamelin, J., Steyer, J.-P., Carrere, H., 2013b. Two-stage  
637 alkaline-enzymatic pretreatments to enhance biohydrogen production from sunflower  
638 stalks. *Environ. Sci. Technol.* 47, 12591–9. doi:10.1021/es402863v
- 639 Monlau, F., Trably, E., Barakat, A., Steyer, J., 2013c. Two-Stage Alkaline – Enzymatic  
640 Pretreatments To Enhance Biohydrogen Production from Sun flower Stalks.

- 641 Nogueroles-Arias, J., Rodríguez-Abalde, A., Romero-Merino, E., Flotats, X., 2012.  
642 Determination of chemical oxygen demand in heterogeneous solid or semisolid samples  
643 using a novel method combining solid dilutions as a preparation step followed by  
644 optimized closed reflux and colorimetric measurement. *Anal. Chem.* 84, 5548–55.  
645 doi:10.1021/ac3003566
- 646 Ntaikou, I., Antonopoulou, G., Lyberatos, G., 2010. Biohydrogen Production from Biomass  
647 and Wastes via Dark Fermentation: A Review. *Waste and Biomass Valorization* 1, 21–  
648 39. doi:10.1007/s12649-009-9001-2
- 649 Ntaikou, I., Kourmentza, C., Koutrouli, E.C., Stamatelatou, K., Zampraka, A., Kornaros, M.,  
650 Lyberatos, G., 2009. Exploitation of olive oil mill wastewater for combined biohydrogen  
651 and biopolymers production. *Bioresour. Technol.* 100, 3724–30.  
652 doi:10.1016/j.biortech.2008.12.001
- 653 Pakarinen, O., Lehtomäki, A., Rintala, J., 2008. Batch dark fermentative hydrogen production  
654 from grass silage: The effect of inoculum, pH, temperature and VS ratio. *Int. J.*  
655 *Hydrogen Energy* 33, 594–601. doi:10.1016/j.ijhydene.2007.10.008
- 656 Pan, C., Zhang, S., Fan, Y., Hou, H., 2010. Bioconversion of corncob to hydrogen using  
657 anaerobic mixed microflora. *Int. J. Hydrogen Energy* 35, 2663–2669.  
658 doi:10.1016/j.ijhydene.2009.04.023
- 659 Pan, J., Zhang, R., Elmashad, H., Sun, H., Ying, Y., 2008. Effect of food to microorganism  
660 ratio on biohydrogen production from food waste via anaerobic fermentation. *Int. J.*  
661 *Hydrogen Energy* 33, 6968–6975. doi:10.1016/j.ijhydene.2008.07.130
- 662 Paraskeva, P., Diamadopoulos, E., 2006. Technologies for olive mill wastewater (OMW)  
663 treatment : a review 1485, 1475–1485. doi:10.1002/jctb
- 664 Sambusiti, C., Monlau, F., Ficara, E., Carrère, H., Malpei, F., 2013. A comparison of  
665 different pre-treatments to increase methane production from two agricultural substrates.  
666 *Appl. Energy* 104, 62–70. doi:10.1016/j.apenergy.2012.10.060
- 667 Sarma, S.J., Pachapur, V., Brar, S.K., Le Bihan, Y., Buelna, G., 2015. Hydrogen biorefinery:  
668 Potential utilization of the liquid waste from fermentative hydrogen production. *Renew.*  
669 *Sustain. Energy Rev.* 50, 942–951. doi:10.1016/j.rser.2015.04.191
- 670 Shin, H.-S., Youn, J.-H., Kim, S.-H., 2004. Hydrogen production from food waste in  
671 anaerobic mesophilic and thermophilic acidogenesis. *Int. J. Hydrogen Energy* 29, 1355–  
672 1363. doi:10.1016/j.ijhydene.2003.09.011
- 673 Show, K.Y., Lee, D.J., Tay, J.H., Lin, C.Y., Chang, J.S., 2012. Biohydrogen production:  
674 Current perspectives and the way forward. *Int. J. Hydrogen Energy* 37, 15616–15631.  
675 doi:10.1016/j.ijhydene.2012.04.109
- 676 Urbaniec, K., Bakker, R.R., 2015. Biomass residues as raw material for dark hydrogen  
677 fermentation – A review. *Int. J. Hydrogen Energy* 40, 3648–3658.  
678 doi:10.1016/j.ijhydene.2015.01.073
- 679 Valdez-vazquez, I., Riosleal, E., Esparzagarcia, F., Cecchi, F., Poggivaraldo, H., 2005. Semi-  
680 continuous solid substrate anaerobic reactors for H<sub>2</sub> production from organic waste:  
681 Mesophilic versus thermophilic regime. *Int. J. Hydrogen Energy* 30, 1383–1391.  
682 doi:10.1016/j.ijhydene.2004.09.016
- 683 VALORGAS, 2010. Compositional analysis of food waste from study sites in geographically  
684 distinct regions of Europe-Valorisation of food waste to biogas. Available from:

685 [http://www.valorgas.soton.ac.uk/Deliverables/VALORGAS\\_241334\\_D2-1\\_](http://www.valorgas.soton.ac.uk/Deliverables/VALORGAS_241334_D2-1_)  
686 [rev\[1\]\\_130106.pdf](http://www.valorgas.soton.ac.uk/Deliverables/VALORGAS_241334_D2-1_rev[1]_130106.pdf) [accessed 12.01.2013]

687 Wang, J., Wan, W., 2009. Factors influencing fermentative hydrogen production: A review.  
688 *Int. J. Hydrogen Energy* 34, 799–811. doi:10.1016/j.ijhydene.2008.11.015

689 Wang, J., Wan, W., 2009. Kinetic models for fermentative hydrogen production: A review.  
690 *Int. J. Hydrogen Energy* 34, 3313–3323. doi:10.1016/j.ijhydene.2009.02.031

691 Wong, Y.M., Wu, T.Y., Juan, J.C., 2014. A review of sustainable hydrogen production using  
692 seed sludge via dark fermentation. *Renew. Sustain. Energy Rev.* 34, 471–482.  
693 doi:10.1016/j.rser.2014.03.008

694 Xia, A., Cheng, J., Ding, L., Lin, R., Huang, R., Zhou, J., Cen, K., 2013. Improvement of the  
695 energy conversion efficiency of *Chlorella pyrenoidosa* biomass by a three-stage process  
696 comprising dark fermentation, photofermentation, and methanogenesis. *Bioresour.*  
697 *Technol.* 146, 436–43. doi:10.1016/j.biortech.2013.07.077

698

699

700 **Figure Captions**

701 Fig. 1 Effect of initial pH on H<sub>2</sub> yield and time required for H<sub>2</sub> production to achieve 95% of  
702 the maximum yield during the DF of food waste at F/M ratio 0.5 and thermophilic  
703 temperature (55±1 °C) using ADS


704 Fig. 2 H<sub>2</sub> yields and B/A ratio as a function of pH in the thermophilic DF of food waste at  
705 F/M ratio 0.5

706 Fig. 3 Effect of alkaline pre-treatment of rice straw on H<sub>2</sub> yields

707 Fig. 4 Effect of inoculum source on cumulative H<sub>2</sub> production from the DF of OMWW using  
708 ADS (anaerobic digested sludge) and WAS (waste activated sludge) as inoculum

709

710 Fig. 1

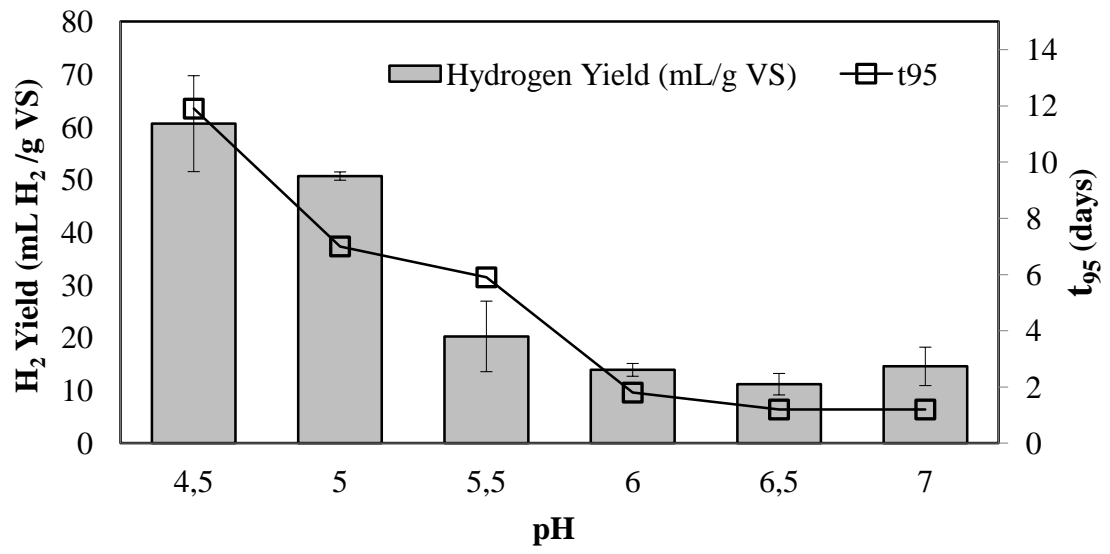

711


712

713

714

715

716 Fig. 2

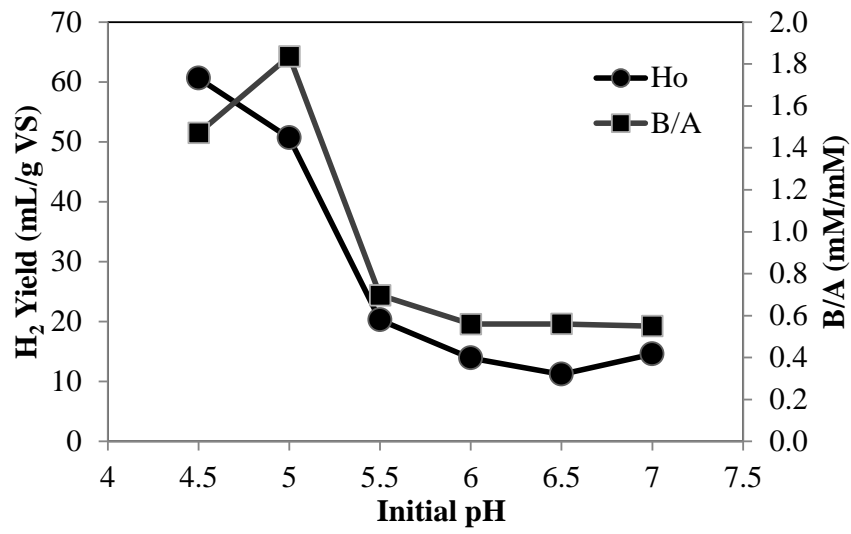

717

718

719

720

721


722

723

724


725

726 Fig. 3

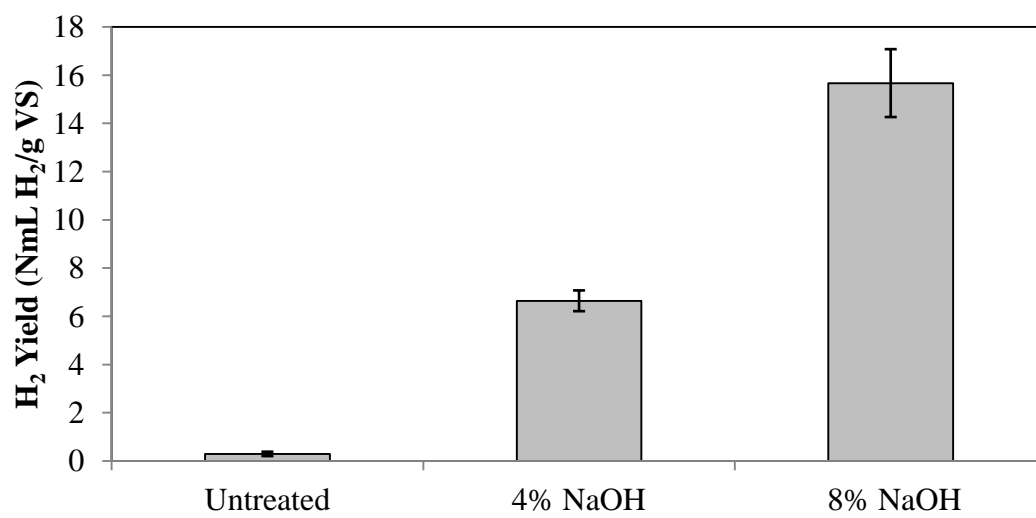

727

728 Fig. 4

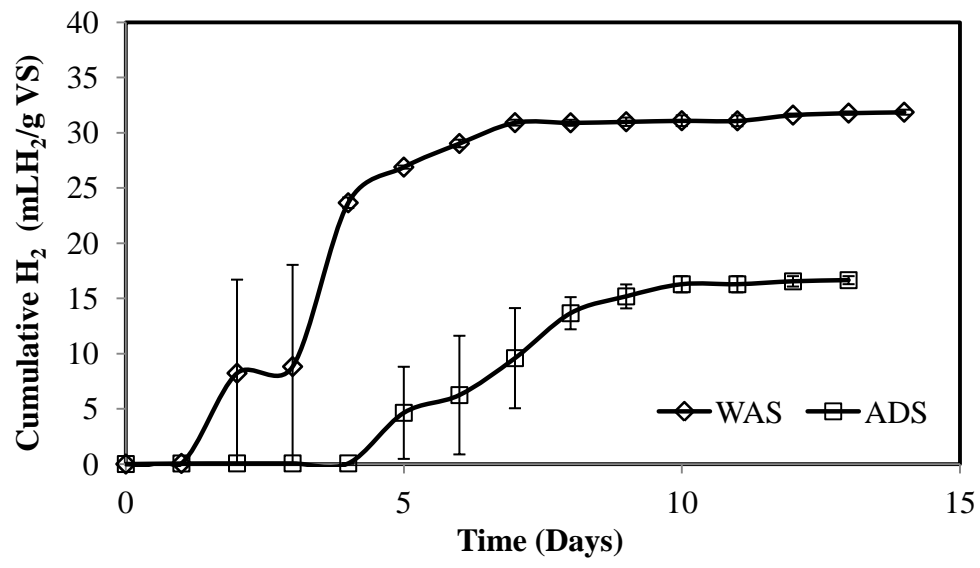

729

730

731

732 **Table 1.** Characteristics of the substrates and inocula used in this study

Characteristics	Food waste	OMWW	Rice Straw	ADS	WAS
<b>pH</b>	4.4 ± 0.1	4.6 ± 0.1	NA	8.3 ± 0.1	7.0 ± 0.1
<b>Chemical Oxygen Demand (COD)</b>	347.6 ± 47.0 g/kg <sub>food waste</sub>	141.5 ± 13.0 g/L <sub>OMWW</sub>	NA	NA	NA
<b>Total solids</b>	21.0 ± 0.1 %	4.7 ± 0.1 %	92.3 ± 0.2 %	2.33 ± 0.4 %	2.9 ± 0.2%
<b>Volatile solids</b>	20.2 ± 0.1 %	3.1 ± 0.3 %	80.9 ± 0.6 %	1.93 ± 0.1 %	1.8 ± 0.1%
<b>Carbohydrate content</b>	105.8 ± 0.7 g/kg <sub>food waste</sub>	12.9 ± 0.2 g/L <sub>OMWW</sub>	NA	NA	NA
<b>Lipids</b>	17.5 ± 1.0 g/kg <sub>food waste</sub>	45.3 ± 4.0 g/L <sub>OMWW</sub>	NA	NA	NA
<b>TKN</b>	6.4 ± 0.2 g/kg <sub>food waste</sub>	0.5 g/L <sub>OMWW</sub>	NA	NA	NA
<b>NH<sub>4</sub>-N</b>	NA	NA	NA	283.5 ± 11.0 mg NH <sub>4</sub> -N/L	203.1 ± 3.0 mg NH <sub>4</sub> -N/L
<b>Alkalinity</b>	NA	NA	NA	1437.2 ± 14 mg CaCO <sub>3</sub> /L	2605.7 ± 70.0 mg CaCO <sub>3</sub> /L
<b>Total phenols</b>	NA	1.16 ± 0.03 g/L <sub>OMWW</sub>	NA	NA	NA

733 NA-Not Analyzed

734

735

736

737

738

739

740

741

742

743 **Table 2.** Experimental conditions applied in the DF batch tests of the tested substrates

Investigation	Substrate	Inoculum	Initial pH	F/M
Effect of initial pH	Food waste	ADS	4.5, 5.0, 5.5, 6.0, 6.5 and 7.0	0.5
Combined effect of food waste and initial pH	Food waste	ADS	5.0 and 6.5	0.5, 1.0 and 1.5
Effect of pre-treatment of substrate	Rice straw	WAS	6.5	7.0
Effect of inoculum source and pre-treatment	OMWW	WAS and ADS	6.0	1.0

744  
745  
746

747 **Table 3.** Effects of initial pH on H<sub>2</sub> production performance and characteristics of accumulated end products in DF of food waste at F/M 0.5

Initial pH	Parameters derived from modified Gompertz model					Characteristics of digestate at the end of DF				
	H <sub>0</sub> (mL/gVS)	L (h)	R (mL/h)	R <sup>2</sup>	Average final pH	H <sub>2</sub> (mM/kg VS)	Acetate (mM/kg VS)	Propionate (mM/kg VS)	Butyrate (mM/kg VS)	Ethanol (mM/kg VS)
4.5	57.3	113.6	0.7	0.993	4.7 ± 0.1	1341.2 ± 201.3	1854.6 ± 114.0	964.5 ± 99.1	2728.7 ± 359.6	263.7 ± 16.1
5.0	50.9	68.1	1.0	0.999	4.9 ± 0.1	1121.3 ± 17.2	1611.8 ± 412	1686.7 ± 253.3	3018.7 ± 109.7	753.4 ± 290.6
5.5	20.3	41.2	0.4	0.995	5.2 ± 0.6	448.4 ± 148.2	2830.2 ± 381.0	1358.1 ± 392.1	1973.7 ± 374.9	623.7 ± 53.8
6.0	15.4	2.0	0.7	0.997	5.3 ± 0.1	308.0 ± 26.8	3558.9 ± 368.7	959.7 ± 6.4	1992.0 ± 238.1	2340.9 ± 263.7
6.5	11.2	3.3	0.8	0.995	5.5 ± 0.1	247.7 ± 45.3	3900.2 ± 838.5	260.0 ± 34.8	2185.5 ± 580.1	3056.7 ± 32.3
7.0	14.6	25.3	6.7	1.000	6.6 ± 0.1	322.6 ± 80.7	5922.4 ± 43.9	877.2 ± 41.4	3255.6 ± 308.1	1673.6 ± 48.4

748 R<sup>2</sup> represents the regression coefficient

749  
750  
751

752 **Table 4.** Effects of initial pH and F/M ratio on H<sub>2</sub> production performance and characteristics of accumulated end products in DF of food waste

pH	F/M	Parameters derived from modified Gompertz model						Characteristics of digestate at the end of DF						
		H <sub>0</sub> (mL/g VS)	L (h)	R (mL/h)	t <sub>95</sub> (day)	R <sup>2</sup>	Average final pH	H <sub>2</sub> (mM/kg VS)	Lactate (mM/kg VS)	Acetate (mM/kg VS)	Propionate (mM/kg VS)	Butyrate (mM/kg VS)	Ethanol (mM/kg VS)	Caproate (mM/kg VS)
5.0	0.5	50.9	68.1	1.0	7.0	0.949	4.9 ± 0.1	2264.9 ± 34.8	17.5 ± 8.1	1610.7 ± 411.8	1687.0 ± 253.3	3018.7 ± 109.7	753.4 ± 290.6	0.0 ± 0.0
	1.0	58.5	81.9	1.4	9.7	0.997	4.7 ± 0.1	2690.9 ± 206.5	18.1 ± 2.2	1264.0 ± 27.1	3135.4 ± 245.7	2959.9 ± 35.2	1876.5 ± 5.9	0.0 ± 0.0
	1.5	54.2	87.9	0.3	46.5	0.991	4.5 ± 0.1	2202.1 ± 545.2	98 ± 10.3	420.3 ± 119.7	842.8 ± 59.2	2638.1 ± 202.9	1402.9 ± 325.6	0.0 ± 0.0
6.5	0.5	11.2	3.4	0.8	1.2	0.995	5.5 ± 0.1	1259.7 ± 188.4	0.0 ± 0.0	6043.0 ± 357.2	830.3 ± 38.9	2344.0 ± 73.3	3056.7 ± 32.3	0.0 ± 0.0
	1.0	42.6	17.0	1.6	4.6	0.938	5.7 ± 0.1	1928.7 ± 89.3	126.3 ± 124.2	1700.0 ± 305.8	775.8 ± 91.1	2062.9 ± 169.1	3602.1 ± 20.7	70.3 ± 9.4
	1.5	56.9	2.3	1.8	7.0	0.944	5.3 ± 0.1	2413.4 ± 197.0	0.0 ± 0.0	2364.5 ± 216.1	655.5 ± 166.3	2410.5 ± 47.5	2206.0 ± 63.1	263.3 ± 23.1

753  
754

755 **Table 5.** Effect of substrate pre-treatment on H<sub>2</sub> production performance measured by the modified Gompertz model and characteristics of accumulated end products in DF  
 756 of rice straw

Pre-treatment method	Parameters derived from modified Gompertz model				Characteristics of digestate at the end of DF						
	H <sub>0</sub> (mL/g VS)	L (h)	R (mL/h)	R <sup>2</sup>	Average final pH	H <sub>2</sub> (mM/kg VS)	Acetate (mM/kg VS)	Propionate (mM/kg VS)	Butyrate (mM/kg VS)	Ethanol (mM/kg VS)	B/A (mM:mM)
Without treatment	0.3	37.3	0.1	0.958	4.7 ± 0.1	12.8 ± 4.1	462.6 ± 42.7	50.8 ± 15.8	46.4 ± 13.7	41.0 ± 7.2	0.10
4% NaOH	6.7	23.9	2.9	0.999	4.9 ± 0.0	296.3 ± 19.2	775.0 ± 13.5	189.4 ± 18.5	227.7 ± 38.5	129.4 ± 44.8	0.29
8% NaOH	15.4	11.3	3.6	0.965	5.2 ± 0.6	699.4 ± 62.8	468.6 ± 84.4	55.6 ± 15.4	614.1 ± 105.8	148.9 ± 11.8	1.31

757  
 758  
 759

760 **Table 6.** Effects of inoculum source on H<sub>2</sub> production performance measured by the modified Gompertz model and characteristics of accumulated end products in DF of  
 761 OMWW

Inoculum type	Parameters derived from modified Gompertz model					Characteristics of digestate at the end of DF						
	H <sub>0</sub> (mL/g VS)	L (h)	R (mL/h)	R <sup>2</sup>	Average final pH	H <sub>2</sub> (mM/kg VS)	Lactate (mM/kg VS)	Acetate (mM/kg VS)	Propionate (mM/kg VS)	Butyrate (mM/kg VS)	Ethanol (mM/kg VS)	B/A (mM:mM)
<b>ADS</b>	106.1	101.0	1.0	0.996	5.6 ± 0.1	751.2 ± 15.2	1651.8 ± 573.4	1752.2 ± 510.9	269.5 ± 183.3	4293.5 ± 93.1	3423.2 ± 1104.2	1.95
<b>WAS</b>	204.1	34.4	2.2	0.984	5.5 ± 0.2	1479.7 ± 46.3	0.0 ± 0.0	6823.0 ± 904.1	282.0 ± 217.1	5062.5 ± 131.0	3022.6 ± 0.8	0.44

762

763 **Table 7.** Summary of various strategies to improve the H<sub>2</sub> yields from substrates with different biodegradability

Substrates	Optimization parameters	Optimal conditions	Substrate concentration (g VS/L)	Culture system	H <sub>2</sub> Yield (NmL/g VS <sub>added</sub> )	Reference
Food waste	Initial pH (4.5-8.5)	pH 6.5	53.1 ± 0.9	Activated sludge, 39 °C, batch	56.2	(Cappai et al., 2014)
Food waste	Initial pH (4.5-7)	pH 4.5 – 5.0	3.4	Anaerobic sludge, 55 ± 2 °C, batch	61.0 ± 9.0 at pH 4.5 51.0 ± 1.0 at pH 5.0	This study
Food waste	F/M ratio (1-10)	F/M ratio of 6.0	18.5	Anaerobic sludge, thermophilic (50 °C), batch	39.0	(Pan et al., 2008)
Food waste	F/M ratio (0.5, 1, 1.5) at pH 5 & 6.5	F/M ratio of 1 at pH 5.0	6.1	Anaerobic sludge, 55 ± 2 °C, batch	60.3 ± 5.0	This study
Sun flower stalks	Substrate pre-treatment (thermo-alkaline)	4% NaOH at 55 °C, 24 hour	5.0	Anaerobic sludge, 35 °C, pH 5.5	4.4 ± 2.6	(Monlau et al., 2013b)
Rice straw	Thermal alkaline pre-treatment	8% NaOH at 55 °C, 24 hour	43.0	Activated sludge, thermophilic (55 °C), initial pH 6.0, batch	15.7 ± 1.0	This study
Rice straw	Inoculum source (MWWS <sup>b</sup> , PMS <sup>c</sup> & CDC <sup>d</sup> )	MWWS	30.0 g TS/L	55 °C, initial pH 6.5, batch	7.1 <sup>e</sup>	(Chen et al., 2012)
OMWW	Inoculum source (activated sludge & anaerobic digestate)	Activated sludge	10.5	55 °C, initial pH 6.0, batch	33.1 ± 1.0	This study

764 <sup>a</sup>N L H<sub>2</sub>/kg total organic carbon

765 <sup>b</sup>MWWS: Municipal wastewater plant sludge

766 <sup>c</sup>PMS: Paper Mill Sludge

767 <sup>d</sup>CDS: Cow Dung Compost

768 <sup>e</sup>mL H<sub>2</sub>/g TS

769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792

**Supplementary Information on**  
**Effects of operational parameters on dark fermentative hydrogen**  
**production from biodegradable complex waste biomass**

Anish Ghimire<sup>a,b,\*</sup>, Fabio Sposito<sup>b</sup>, Luigi Frunzo<sup>c</sup>, Eric Trably<sup>d</sup>, Renaud Escudie<sup>d</sup>, Francesco Pirozzi<sup>b</sup>, Piet N.L. Lens<sup>e</sup>, Giovanni Esposito<sup>a</sup>

<sup>a</sup>Department of Civil and Mechanical Engineering, University of Cassino and Southern Lazio, via Di Biasio 43, 03043 Cassino (FR), Italy

<sup>b</sup>Department of Civil, Architectural and Environmental Engineering, University of Naples Federico II, via Claudio 21, 80125 Naples, Italy


<sup>c</sup>Department of Mathematics and Applications Renato Caccioppoli, University of Naples Federico II, via Cintia, Monte S. Angelo, I-80126 Naples, Italy

<sup>d</sup>INRA, UR0050, Laboratoire de Biotechnologie de l'Environnement, Avenue des Etangs, F-11100 Narbonne, France

<sup>e</sup>UNESCO-IHE Institute for Water Education, Westvest 7, 2611 AX Delft, The Netherlands

\* Corresponding author. Address: Department of Civil and Mechanical Engineering, University of Cassino and Southern Lazio, via Di Biasio 43, 03043 Cassino (FR), Italy. Tel. +39 0776 2994339 Fax +39 0776-2993939

*E-mail address:* a.ghimire@unicas.it, anishghimire@gmail.com (Anish Ghimire)

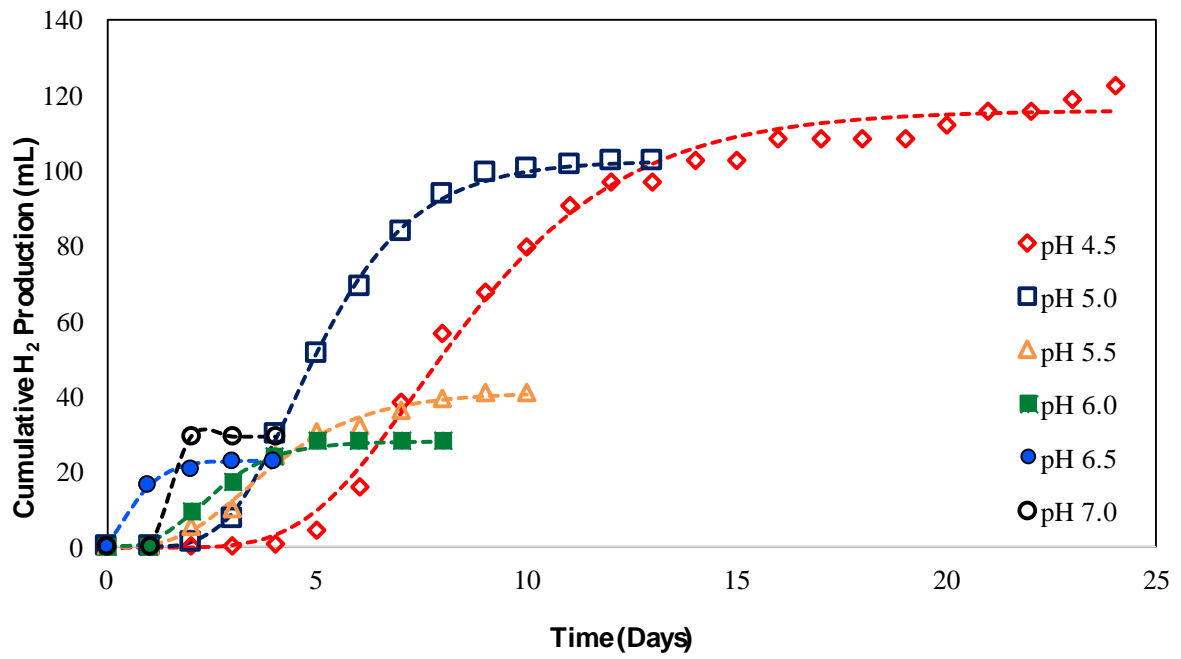

793

794 Fig. S1. Cumulative H<sub>2</sub> production at different initial pH values using food waste at a F/M  
 795 ratio 0.5 and ADS as inoculum (dotted lines represents the results from a modified Gompertz  
 796 model)