



HAL
open science

Contribution of car, truck, bus and subway wash station discharges to stormwater pollution (Toulouse, France)

Audrey Breton, Claire Vialle, Mireille Vignoles, Christine Cecutti, Christian Vignoles, Caroline C. Sablayrolles

► To cite this version:

Audrey Breton, Claire Vialle, Mireille Vignoles, Christine Cecutti, Christian Vignoles, et al.. Contribution of car, truck, bus and subway wash station discharges to stormwater pollution (Toulouse, France). *Fresenius Environmental Bulletin*, 2010, 19 (9a), pp.1954-1962. hal-02660604

HAL Id: hal-02660604

<https://hal.inrae.fr/hal-02660604v1>

Submitted on 17 Nov 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Contribution of car, truck, bus and subway wash station discharges to stormwater pollution (Toulouse, France)

Audrey BRETON¹, Claire VIALLE¹, Mireille MONTREJAUD-VIGNOLES^{2,3}, Christine CECUTTI^{2,3},
Christian VIGNOLES⁴ AND Caroline SABLAYROLLES^{2,3,*}

¹CATAR-CRITT Agroressources ; LCA (Laboratoire de Chimie Agro-Industrielle) – UMR 1010 INRA/INPT ;
4, allée Emile Monso BP-44362 31432 Toulouse Cedex 4, France

²Université de Toulouse; INP; LCA (Laboratoire de Chimie Agro-Industrielle); ENSIACET,
4, allée Emile Monso BP-44362 31432 Toulouse Cedex 4, France

³INRA; LCA (Laboratoire de Chimie Agro-Industrielle); F-31029 Toulouse, France

⁴VEOLIA EAU, Direction Régionale Sud-Ouest, 22 avenue Marcel Dassault BP 5873 F-31506 Toulouse
cedex 5, France

Abstract

The European Water Framework Directive requires the monitoring of priority pollutants entering surface waters. This includes notably the stormwater network. In this study, the contribution of discharges from wash stations to pollution of the stormwater network was investigated. Six wash stations discharging wastewater into the stormwater network were selected: (i) one trucks wash station, (ii) two self-service stations for cars and motorcycles, (iii) two bus wash stations, (iv) one subway wash station. Classical parameters (conductivity, pH, turbidity, chemical oxygen demand, total nitrogen, total phosphorus, suspended solid) and organic micropollutants (Polycyclic Aromatic Hydrocarbons (PAHs), Total Hydrocarbons (TH) and Methylterbutylether (MTBE)) were checked and measured. Concentrations were compared with limit values from Greater Toulouse decontamination service regulations for the discharge licenses of carwashes, and under the French decree for discharges into the natural environment and with the proposed directive from the European Parliament and the Council, dealing with environmental quality standards. The result showed a decrease of pollution downstream of the pre-treatments for subway wash stations but not for bus wash stations. According to the directives, the pre-treatment processes are not sufficient to justify a discharge into the stormwater network.

Keywords: *Organic compounds, concentrations, separated sewage system, water quality, run-off waters.*

Introduction

Stormwater is known to be an important source of received water pollution [1]. With regard to the European Water Directive [2], it is necessary to monitor a wide range of organic micropollutants in addition to classical water quality parameters.

Concentrations of classical parameters observed in urban runoff are listed in Table 1. The values observed in the literature for classical parameters show an average pH around 7.5 ([3], [4]). The COD values varied according to the type of surface considered ([5]; [6]). Organic micropollutants in the environment originate from anthropogenic activities. Their concentrations observed in urban runoff are listed in Table 2. The main sources of polycyclic aromatic hydrocarbons originate from pyrolysis of organic matter under high temperature [7]. Actually, urban surfaces can receive deposits of PAHs from different sources via both atmospheric transport and local activity [8]. Methylterbutylether is a volatile organic compound produced from natural gas. It is introduced into the environment via leaking petroleum storage tanks, urban runoff, and motorized watercraft [9].

The case of Toulouse in France is particularly interesting since the town has a separated sewer system where organic micropollutants in the wastewater system cannot mix with the stormwater [10]. However, water in the latter system comes not only from runoffs but also from wash station discharges. Indeed, industrial waters can be discharged into sewers under a permission of discharge from the community [11]. Wash stations can discharge their waters after pre-treatment through two structures (figure 1). Waters go through the scrubber, where the solids are removed, then through the oil separator to remove hydrocarbons. These systems should be in accordance with French norm XP P 16-441 [13] and require regular maintenance to keep up their efficiency [12].

The aim of this work was to study the efficiency of these pre-treatment processes and the rejects from wash stations upstream of the stormwater network to accurately evaluate the impact of this source of pollution on stormwater quality.

Materials and Methods

Sampling sites

The pre-treatment efficiency was evaluated at three points for the subway and three points for bus wash stations. For the subway station, the three points tested were: machine parts washing (site A), vehicle washing (site B) and rail washing (site C). The selected points for bus stations were the large workshop wash (site D), vehicle wash station (site E) and the machine parts washing (site F).

One subway, one bus, one truck and two car wash stations were selected to evaluate pollution. On Site 1, trucks only, were washed manually. The second site chosen was for cars and motorcycles with a self-service high-pressure water jet (Site 2). Site 3 was in a petrol station and comprised a self-service high-pressure water jet and roller brush washing. Site A was a subway wash station (machine parts washing). Site E was a bus wash station. These five sites discharged wastewater into the stormwater network downstream of a pre-treatment system composed of a scrubber and an oil separator.

Figure 2 shows the sampling site locations.

Sampling method

Concerning sites selected to evaluate pre-treatment efficiency, samples were collected and analysed between September 2002 and September 2003. Five samples per site were taken during the year. Samples were taken manually upstream and downstream of the pre-treatment system. Each time, around 15L of discharge was collected and then homogenized in order to obtain a representative sample.

Concerning sites 1, 2 and 3, samples were collected and analysed between December 2006 and December 2007. For sites A and E samples were collected and analysed between September 2002 and September 2003. Five samples per site were taken during the year. Samples were taken manually from a conveyance at the pre-treatment process exit. Each time, around 15L of discharge was collected and then homogenized in order to obtain a representative sample.

Analysis

Conductivity, pH and turbidity of total water samples were checked and measured. Commercial tests (Spectroquant®, Merck) were used to analyze chemical oxygen demand (COD), nitrogen (tot-N), phosphorus (tot-P) on raw and filtered samples. Suspended solid (SS) was investigated by filtration using NF-T90-105-1 and NF-T90-029 respectively.

To complete the common characterization, organic micropollutants were analyzed. Polycyclic aromatic hydrocarbons (PAHs) were analysed using liquid-liquid extraction with Hexane followed by liquid chromatography with fluorescence detection according to NF EN ISO 17993. The elution was made with mobile phase consisted of acetonitrile and water. A mixed of two deuterated compounds was used as internal standard. Detection was performed with a fluorescence detector at emission and excitation wavelengths of studied compounds. The 16 PAHs from the United States Environmental Protection Agency were targeted. Limit of quantification (LOQ) for the sum of PAHs was 0.01 µg/L. Methyl *tert*-butyl ether (MTBE) was analysed with gas chromatography-mass spectrometry after head-space extraction with a limit of quantification of 1 µg/L. A deuterated compound (MTBE-d₃) was used as internal standard. Mass chromatography of m/z 73 (MTBE) and m/z 76 (MTBE-d₃) in full scan mode was used for quantification. Total hydrocarbons (TH) were analysed using liquid-liquid extraction with oil ether and a gas chromatograph equipped with a flame ionization detector according to NF EN ISO 9377-2. Two compounds were used as references for the retention time: n-Decane and n-Tetracontane. Limit of quantification was 0.10 mg/L.

Table 3 and 4 resume analytical method.

To complete the study, subway wash station effluents (site A) were tested using a biodegradability test according to the standardised OCDE 301 B test. This test is based on the modified Sturm method. Principle of the method is to quantify the CO₂ release by the effluent during 28 days. This is a respirometric method. In the modified Sturm test, we consider that we have an easily biodegradable effluent if produced CO₂ reaches 60% in ten days after the rate of produced CO₂ reaches 10%.

Results and discussion

Pre-treatment system efficiency

The concentrations of classical parameters were determined upstream and downstream of the pre-treatment for the bus and subway wash stations selected. Table 5 shows concentrations for raw and filtered samples.

From Table 5 it can be seen that concentrations of COD, Tot-P, Tot-N and SS, for the three sites (A, B, C) of subway wash stations and for site D, are less downstream of pre-treatment than upstream. The Pre-treatments for these sites seem to be efficient since a reduction of pollution is observed. On the other hand, concentrations of classical parameters are higher in downstream samples than in upstream ones for sites E and F, and no reduction of pollution is observed. Therefore pre-treatment systems seem to be inefficient to treat the wastewater from the bus wash stations. This can be explained by the fact that either the pre-treatment is not adapted to this type of effluent, or there is insufficient maintenance.

On account of the high COD concentration of subway wash effluent, a biodegradability test was performed on site A effluent. Figure 3 shows the results obtained for the biodegradability test.

As can be seen in Figure 3, the curve reaches 60% of produced CO₂ at the 10th day of the test. According to the modified Storm method, the subway wash effluent was easily biodegradable. Moreover, the curve reaches 100% biodegradability after 25 days. The subway effluent rejected a lot of pollution into the stormwater network but considering its biodegradability this effluent rejected into the stormwater network, was an acceptable effluent. This result showed that the pollution covering classical parameters is not sufficient to characterize the effluent considered and the biodegradability should also be tested to evaluate the quality of the effluent rejected.

Concentrations of Tot-P and Tot-N are almost equal between raw and filtered samples. These types of pollutant are more concentrated in aqueous phase than in particulate phase. The values of COD decrease between the raw and filtered samples for sites A, B, C, D and F. For site E, COD values are higher in filtered samples than in raw samples. The difference between raw and filtered samples corresponds to suspended solids (SS). The pollutants (tot-N, tot-P and COD) are fixed on the suspended solids and consequently they transport most of the pollution. This result agrees with the studies of [14], [15], and [16]. They explain that more than 80% of pollution is conveyed by suspended solids.

Concentrations in wash station samples

Minimum, maximum, mean, median and standard deviation values were calculated for each parameter for the six wash stations selected (Table 6). Values less than the quantification limit were taken as zero for statistical calculations.

According to Table 6, pH of water seems to be constant during the study for each site. It satisfies the legislation which requires a value between 5.5 and 9.5 for discharge in surface water [17] and corresponds to the values found in the literature ([4], [10], [18]). Conductivity is high and variable over the sampling period with mean values from 490 to 4 360 µS/cm according to type of wash station. Globally, the observed values are higher than those found in urban runoff literature ([3], [10]). Mean values of COD (from 227 to 949 mg/L) are always above the required threshold of 125 mg/L [17] and these observed values are higher than those found in the literature ([10], [19], [20], [21]). The mean values for SS from 45 to 869 mg/L do not conform to the legislation which requires a value below 35 mg/L. Concerning tot-P, only Site 3 and Site 5 satisfy the limit value of 10 mg/L. Concentrations of tot-N for the five sites are lower than the limit value of 30 mg/L. For conventional water parameters, Site 1 (manual truck wash) and 4 (subway wash station) appear to be much more polluted overall than Sites 6, 2, 4 and 3. Nevertheless, classical parameters give values with an order of magnitude closer to wastewater than urban runoff and these results show that the pre-treatment processes of at least one of these wash stations are not sufficient to justify discharge into the storm water network.

Mean values for the sum of PAHs was higher than values found in the literature for urban runoffs ([22], [23]). MTBE mean concentrations correspond to German and Italian drinking water values for instance ([24], [25]). Total Hydrocarbons were always under the 10 mg/L fixed by the discharge license. Results overall show that Site 1 is the most polluted in the organic compounds analyzed.

Conclusions

This study aims to evaluate the efficiency of pre-treatment systems of wash stations and the impact of their discharges on the stormwater quality in a city equipped with a separated sewer system. Screening of classical parameters upstream and downstream of pre-treatment was performed. It reveals that this system is not adapted to treat water from bus wash stations unlike the subway wash stations. It was noticeable that suspended solids transport a lot of pollutants. The screening of classical parameters and organic micropollutants in wash station wastewaters reveals that measured concentrations in wash station discharges were closer to values found in wastewater than in runoff water. According to this observation and the directive, pre-treatment processes are not sufficient to justify discharge into the stormwater network.

References

- [1]. Clark J. W., Viessman W. and Hammer M. J. (1971). Water supply and pollution control, 2nd ed., International Textbook Company, 44-45.
- [2]. European Commission (2000) Water Framework Directive 2000/60/EC. Available: http://eur-lex.europa.eu/pri/en/oj/dat/2000/l_327/l_32720001222en00010072.pdf
- [3]. Daligault A., Meaudre D., Arnaud D., Duc D., Bardin N., Aires N., Biau D., Schmid J., Clement P. and Viau J.Y. (1999). Stormwater and lamella settlers: efficiency and reality. Water Science and Technology, 39(2), 93-101.
- [4]. Legret M. (2002). Effets d'une chaussée poreuse à structure réservoir sur la qualité des eaux pluviales. JIE 2002, Poitiers, tome 1, 30, 1-9.
- [5]. Gromaire-Mertz M.C., Garnaud S., Gonzalez A., and Chebbo G. (1999). Characterisation of urban runoff pollution in Paris. Water Science & Technology, 39 (2), 1-8.
- [6]. Legret M. and Pagotto C. (1999). Evaluation of pollutant loadings in the runoff waters from a major rural highway. The Science of The Total Environment, 235, 143-150.
- [7]. Moillon R., Gonzalez A. and Thevenot D. R. (2001). Aromatic and aliphatic hydrocarbons distribution (in french). Techniques Sciences et Méthodes, 5, 60-71.
- [8]. Cailleaud K., Forget-Leray J., Souissi S., Lardy S., Augagneur S. and Budzinski H. (2007). Seasonal variations of hydrophobic organic contaminant concentrations in the water-column of the Seine estuary and their transfer to a planktonic species *Eurytemora affinis* (Calanoid, copepod). Part 1: PCBs and PAHs. Chemosphere, 70, 270-280.
- [9]. Achten C., Kolb A. and Püttman W. (2001). Methyl *tert*-butyl ethet (MTBE) in urban and rural precipitation in Germany. Atmospheric Environment, 35, 6337-6345.
- [10]. Xaumier F., Montréjaud-Vignoles M. and Renner C. (2004a). Study of the Toulouse (France) urban runoff (in french), Intern report, Veolia Eau - Anjou Recherche - INP - ENSIACET - LCA, 100 pages.
- [11]. Public health code, Article L1331-10. (in French)
- [12]. Toulouse wastewater service regulation (2002). III- Industrial wastewater – Article 26.
- [13]. French Norm XP-P-16-441 (1998) : Scrubber, separator of light liquids and metal combined apparatus.(in French)
- [14]. Xaumier F., Montréjaud-Vignoles M., Vignoles C. and Renner C. (2004b). The effectiveness of two urban runoff pre-treatment systems, situated before introduction into the storm sewer network, in Toulouse (France) (in French). NOVATECH 2004.
- [15]. Aires N., and Tabuchi J.P. (1995). Les séparateurs à hydrocarbures et la dépollution des eaux pluviales, Techniques Science et Méthodes, 11, 862-864.
- [16]. Chebbo G., Mouchel J.M., Saget A., and Gousailles M. (1995). La pollution des rejets urbains par temps de pluie : flux, nature et impacts, Techniques Science et Méthodes, 11, 796-806.
- [17]. Decree February 2nd (1998). Water sampling and consumption. Pollutants emissions of industries (in french). Journal officiel du 3 mars 1998. Available : <http://texteau.ecologie.gouv.fr/texteau/ServletUtilisateurAffichageTexte?idTexte=858>
- [18]. Barraud S., Gautier A., Bardin J.P. and Riou V. (1999). The impact of intentional stormwater infiltration on soil and groundwater. Water Science & Technology, 39(2), 185-192.
- [19]. Boisson J.C., and Vallais C. (1998). Impacts des eaux de ruissellement de chaussées sur les milieux aquatiques. 3^{ème} conférence internationale Novatec, Lyon, vol 1, 67-74.
- [20]. Balades J. D., Berga P., and Bourgogne P. (1998). Contribution des apports routiers aux rejets urbains de temps de pluie rôle de la conception et de la gestion de la voirie, JIE 98, Poitiers, Tome 1, 15, 1-14.
- [21]. Barraud S., and Fouillet B. (2006). Caractérisation des eaux pluviales et risques sanitaires. Conférence ASTEE, Eau et santé, Eaux pluviales et assainissement : nouvelles préoccupations sanitaires, Lyon-Villeurbanne.

- [22]. Fernandes M.B., Sicre M.A., Boireau A. and Tronszynski J. (1997). Polyaromatic hydrocarbon (PAH) distributions in the Seine River and its estuary. *Marine Pollution Bulletin*, 34, 857-867.
- [23]. Popp P., Bauer C. and Wennrich L. (2001). Application of stir bar sorptive extraction in combination with column liquid chromatography for the determination of polycyclic aromatic hydrocarbons in water samples. *Analytica Chimica Acta*, 436, 1-9.
- [24]. Kolb A. and Püttman W. (2006). Methyl tert-butyl ether (MTBE) in finished drinking water in Germany. *Environmental Pollution*, 140, 294-303.
- [25]. Piazza F., Barbieri A., Violante F.S. and Roda A. (2001). A rapid and sensitive method for methyl tert-butyl ether analysis in water samples by use of solid microextraction and gas chromatography-mass spectrometry. *Chemosphere*, 44, 539-544.
- [26]. Aydin M.E., Kara G., Wichmann H., Bahadir M. (2004). Aromatic hydrocarbons in water and wastewater of Konya-Turkey. *Fresenius Environmental Bulletin*, 13 (11b), 1315-1321.
- [27]. Blanchard M., Teil M.J., Ollivon D., Garban B., Chesterikoff C. and Chevreuil M. (2001). Origin and distribution of polyaromatic hydrocarbons and polychlorobiphenyls in urban effluents to wastewater treatment plants of the Paris area (France). *Water Research*, 35(15), 3679-3687.
- [28]. Bourdat-Deschamps M, Daudin J-J. and Barriuso E. (2007). An experimental design approach to optimise the determination of polycyclic aromatic hydrocarbons from rainfall water using stir bar sorptive extraction and high performance liquid chromatography-fluorescence detection. *Journal of chromatography A*. 1167, 143-153.
- [29]. Ellis B., Marsalek J., and Chocat B. (2005). Article 97: Urban water quality. *Encyclopedia of hydrological science*. Edited by M.G. Anderson, John Wiley & sons.
- [30]. Aydin M.E., Wichmann H., Bahadir M. (2004). Priority organic pollutants in fresh and waste waters of Konya-Turkey. *Fresenius Environmental Bulletin*, 13 (2), 118-123.
- [31]. European Commission (2006). Proposal for a directive of the European Parliament and of the Council on environmental quality standards in the field of water policy and amending Directive 2000/60/EC
- [32]. Law R.J., Dawes V.J., Woodhead R.J. and Matthiessen P. (1997). Polycyclic aromatic hydrocarbons (PAH) in seawater around England and Wales. *Marine Bulletin Pollution*, 34, 306-322.
- [33]. Motelay-Massei A., Garban B., Tiphagne-Larcher K., Chevreuil M. and Ollivon D. (2006). Mass balance for polycyclic aromatic hydrocarbons in the urban watershed of Le Havre (France): Transport and fate of PAHs from atmosphere to the outlet. *Water Research*, 40, 1995-2006.
- [34]. Olivella M.A., Ribalta T.G., De Febrer A.R., Mollet J.M. and De Las Heras F.X.C. (2006). Distribution of polycyclic aromatic hydrocarbons in riverine waters after Mediterranean forest fires. *Science of the total environment*, 355, 156-166.
- [35]. Walker W. J., McNutt R. P. and Maslanka C. K. (1999). The potential contribution of urban runoff to surface sediments of the Passaic River: sources and chemical characteristics. *Chemosphere*, 38(2), 363-377.

Corresponding author:

Name: **Sablayrolles Caroline**

Address for correspondence : Laboratoire de chimie agro-industrielle - ENSIACET

4 allée Emile Monso - BP 44362 - 31432 Toulouse cedex 4 -
France

Phone number: + 33 (0)5.34.32.35.51.

Fax number: + 33 (0)5.34.32.35.99.

Email address: caroline.sablayrolles@ensiacet.fr

Table 1. Reported concentrations of classical parameters in waters.

Water type	n	Origin	Concentrations				References
			Min.	Max.	Mean	Median	
pH							
Runoff water: -Tank structure	28	France	6.1	8.7	7.5		[4]
-Drainage area	16		6.2	8.1	7.2		
Runoff water	-	France				7.51	[19]
Runoff water	48	France	6.3	7.9	7.3	7.4	[6]
Runoff water	27	France	6.9	8.2	7.5		[3]
	29		6.8	8	7.5		
Runoff water	9	France	6.7	7.7	7.1		[18]
Dam water	30	Turkey	8.1	8.4	8.3		[26]
Runoff water: - Boulevards outlet	20	Toulouse (France)	6.8	9.2	8.1	8.1	[10]
- Mirail outlet	19		7.4	9.4	8.3	8.0	
Conductivity (µS/cm)							
Runoff water	-	France			245		[19]
Runoff water	46	France	60	17620	1356	290	[6]
Runoff water	27	France	50	244	99		[3]
	29		107	402	189		
Runoff water	9	France	54	110	74.4		[18]
Runoff water: - Boulevards outlet	20	Toulouse (France)	52	533	293	285	[10]
- Mirail outlet	19		80	462	230	227	
Turbidity (NTU)							
Runoff water: - Boulevards outlet	20	Toulouse (France)	6.4	619	123	65	[10]
- Mirail outlet	19		13	223	48	28	
Dam water	30	Turkey	3.5	30	8.4		[26]
COD (mg/L)							
Runoff water: -Roof	16	France	5	318		31	[5]
-Courtyard	15		34	580		95	
-Street	26		48	964		131	
Runoff water: -Tank structure	31	France	<20	36	<22		[4]
-Drainage area	18		<20	43	<23		
Runoff water	-	France			116		[19]
Wastewater GOS	-	Turkey	129	178	169		[26]
Wastewater UCW	-		28.1	107	67.6		
Runoff water	45	France	21	507	103	80	[6]
Runoff water	-	France	16	75	27		[20]

Runoff water	-	Europe	20	365	85		[21] ; [28]
Runoff water: - Boulevards outlet	20	Toulouse	20	360	116	56	[10]
- Mirail outlet	19	(France)	<10	123	48	37	
Suspended Solid (mg/L)							
Runoff water: -Roof	16	France	3	304		29	[5]
-Courtyard	15		22	490		74	
-Street	26		49	498		92,5	
Runoff water: -Tank structure	31	France	0.6	139	13		[4]
-Drainage area	19		5	86	33		
Runoff water		France				152	[19]
Runoff water	16	France	267		71	47	[6]
Runoff water	-	France	1	150	18		[20]
Runoff water	-	Europe	1	4582	190		[21] ; [28]
Runoff water	27	France	11	458	158		[3]
	29		25	964	199		
Runoff water	9	France	4	130	45		[18]
Wastewater GOS	-	Turkey	8.0	197	54		[26]
Wastewater UCW	-		940	958	949		
Runoff water: - Boulevards outlet	20	Toulouse	4	1063	211	96	[10]
- Mirail outlet	19	(France)	11	314	81	45	
Total Nitrogen (mg/L)							
Runoff water	43	France	0.6	10.2	2.3	1.7	[6]
Runoff water	-	Europe	0.4	20	3.2		[21] ; [28]
Runoff water	27	France	1	12	2.8		[3]
	29		1	50	4.7		
Runoff water	9	France	1.2	3.6	2.2		[18]
Wastewater GOS	-	Turkey	24	200	55		[26]
Wastewater UCW	-		7.6	10.2	8.9		
Runoff water: - Boulevards outlet	20	Toulouse	<10	32	12	11	[10]
- Mirail outlet	19	(France)	<10	40	6.1	0	
Total Phosphorus (mg/L)							
Runoff water	-	Europe	0.02	14.3	0.34		[21] ; [28]
Runoff water	26	France	0.3	4.7	0.56		[3]
	29		0.3	19.1	1.1		
Runoff water: - Boulevards outlet	20	Toulouse	0.5	3.6	1.2	0.8	[10]
- Mirail outlet	19	(France)	0.1	2.5	0.5	0.2	

Table 2. Reported concentrations of organic pollutants in waters.

Organic micropollutants	Water type	n	Origin	Concentrations				References
				Min.	Max.	Mean	Median	
PAHs ($\mu\text{g/L}$)								
PAHs ($\Sigma 11$)	Surface water	6	France	4.10^{-3}	0.036	0.020	-	[22]
PAHs ($\Sigma 15$)	Sea water	-	UK	1.10^{-3}	24.821	1.002	-	[30]
PAHs (-)	Runoff water	35	France	0.011	0.474	0.096	0.074	[6]
PAHs ($\Sigma 16$)	Raw wastewater	4	France	1.277	3.240	1.998	1.737	[26]
PAHs ($\Sigma 15$)	Underground water	1	Germany	-	-	$9.4.10^{-3}$	-	[23]
	Surface water	1		-	-	0.280	-	
	Rainwater	1		-	-	0.079	-	
PAHs ($\Sigma 14$)	Runoff water	33	France	-	-	0.149	0.063	[31]
PAH ($\Sigma 16$)	Fresh water	5	Turkey	<0.05	1.85	0.83	0.79	[30]
	Wastewater	5		3.73	8.33	5.35	4.45	
PAHs ($\Sigma 12$)	Surface water	27	Spain	2.10^{-3}	0.336	0.042	0.013	[32]
PAHs ($\Sigma 15$)	Rainwater	6	France	0.031	0.105	0.060	0.061	[27]
PAHs ($\Sigma 11$)	Surface water	10	France	0.123	0.407	0.227	0.211	[8]
Total hydrocarbons (mg/L)								
TH	Runoff water	56	France	0.1	4.9	2.3	-	[3]
TH	Runoff water	44	France	0.14	4.2	1.2	0.86	[6]
TH	Runoff water	-	Europe	0.04	25.9	1.9	-	[18]
MTBE ($\mu\text{g/L}$)								
MTBE	Rainwater	35	Germany	<0.01	0.085	0.032	0.024	[9]
	Runoff water	12		0.030	1.174	0.204	0.114	
MTBE	Drinking water	5	Italy	0.05	0.40	0.17	0.08	[25]
	River water	3		0.10	0.15	0.12	0.10	
MTBE	Drinking water	83	Germany	0.017	0.712	0.089	0.038	[24]

Table 3. Analytical methods for classical parameters.

Parameters	Standard	Spectroquant® test reference	Measuring range	Method
pH	NFT 90-008	-	-	potentiometric
Conductivity	NF EN 27888	-	-	conductimetric
Turbidity	NF EN ISO 7027	-	-	optical
SS	NF EN ISO 872	-	-	filtration
COD	NFT 90-101	1.14541.0001	100 – 1500 mg/L	Photometry (593 nm)
tot-P	NF EN ISO 11905-1	1.14543.0001	0.05 – 5 mg/L	Photometry (710 nm)
tot-N	NF EN ISO 6878	1.14763.0001	10 – 150 mg/L	Photometry (338nm)

Table 4. Analytical methods for organic micropollutants.

Organic micropollutants	Standard	Extraction	Analyse	LOQ
PAH	NF EN ISO 17993	Liquid – Liquid with Hexane	HPLC – FLD (Acetonitrile/Water)	0.01 µg/L (sum of 16 PAHs from EPA)
MTBE	-	Head-space	GC - MS	1.0 µg/L
TH	NF EN ISO 9377-2	Liquid-Liquid with oil ether	GC - FID	0.1 mg/L

Table 5. Concentration of classical parameters for the bus and subway wash stations studied.

	Units	n	Raw samples		Filtered samples	
			Upstream of pre-treatment	Downstream of pre-treatment	Upstream of pre-treatment	Downstream of pre-treatment
Site A: machine parts washing – Subway						
COD	mg/L	5	3290 ±329	1790 ±179	2200 ±220	1172 ±117
Tot-P	mg/L	5	108 ±10.8	42.9 ±4.3	47.5 ±4.8	42.9 ±4.3
Tot-N	mg/L	5	31 ±3.1	22 ±2.2	31 ±3.1	24 ±2.4
pH	-	5	10.3 ±0.1	10.1 ±0.1	10.2 ±0.1	9.9 ±0.1
Conductivity	μS/cm	5	2820 ±10	1906 ±10	2670 ±10	1789 ±10
Turbidity	NTU	5	950 ±95	870 ±87	-	-
SS	mg/L	5	1136 ±114	790 ±79	-	-
Site B: vehicle washing – Subway						
COD	mg/L	5	106 ±11	38 ±4	43 ±4	21 ±2
Tot-P	mg/L	5	1.9 ±0.2	0.8 ±0.1	0.6 ±0.1	0.6 ±0.1
Tot-N	mg/L	5	7.0 ±0.7	5.0 ±0.5	6 ±0.6	2 ±0.2
pH	-	5	8.7 ±0.1	8.5 ±0.1	8.4 ±0.1	8.4 ±0.1
Conductivity	μS/cm	5	255 ±10	230 ±10	236 ±10	233 ±10
Turbidity	NTU	5	81.5 ±8.2	27.5 ±2.8	-	-
SS	mg/L	5	314 ±31	20 ±2	-	-
Site C: rail washing – Subway						
COD	mg/L	5	1148 ±115	51 ±5	372 ±37	25 ±3
Tot-P	mg/L	5	1.5 ±0.2	0.7 ±0.1	0.4 ±0.1	0.4 ±0.1
Tot-N	mg/L	5	22 ±2.0	11 ±1.0	16 ±2.0	11 ±1.0
pH	-	5	9.7 ±0.1	9.2 ±0.1	8.4 ±0.1	8.1 ±0.1
Conductivity	μS/cm	5	1395 ±10	234 ±10	1129 ±10	227 ±10
Turbidity	NTU	5	958 ±96	59 ±6	-	-
SS	mg/L	5	1252 ±125	81 ±8	-	-
Site D: large workshop wash – Bus						
COD	mg/L	5	413 ±41	285 ±29	298 ±30	144 ±14
Tot-P	mg/L	5	0.6 ±0.1	0.2 ±0.1	0.1 ±0.1	0.1 ±0.1
Tot-N	mg/L	5	<10	<10	<10	<10
pH	-	5	7.6 ±0.1	7.4 ±0.1	6.7 ±0.1	6.9 ±0.1
Conductivity	μS/cm	5	534 ±10	540 ±10	518 ±10	512 ±10
Turbidity	NTU	5	203 ±20	79 ±8	-	-
SS	mg/L	5	318 ±32	77 ±8	-	-
Site E: vehicle wash station – Bus						
COD	mg/L	5	129 ±13	349 ±35	190 ±19	1119 ±112
Tot-P	mg/L	5	0.17 ±0.1	0.3 ±0.1	0.13 ±0.1	0.34 ±0.1
Tot-N	mg/L	5	<10	<10	<10	<10
pH	-	5	7.6 ±0.1	7.0 ±0.1	6.2 ±0.1	6.8 ±0.1
Conductivity	μS/cm	5	255 ±10	222 ±10	237 ±10	199 ±10
Turbidity	NTU	5	76 ±8	59 ±6	-	-
SS	mg/L	5	94 ±9	73 ±7	-	-
Site F: machine parts washing – Bus						
COD	mg/L	5	669 ±67	786 ±79	233 ±23	209 ±21
pH	-	5	7.5 ±0.1	7.5 ±0.1	7.8 ±0.1	7.6 ±0.1
Turbidity	NTU	5	252 ±25	324 ±32	-	-
SS	mg/L	5	420 ±42	869 ±87	-	-

Table 6. Statistical data on water quality of the three carwashes studied.
 *Environmental standards under French legislation (Decree February 2nd, 1998)

	Units	n	Min.	Max.	Mean	Median	Standard deviation	Environmental standards
Site 1: truck carwash								
COD	mg/L	5	539	1 506	949	654	462	125*
Tot-P	mg/L	5	16.5	53.2	35.5	29.6	15.6	10*
Tot-N	mg/L	5	8	19	12	11	4	30*
pH	-	5	4.9	6.9	6.0	5.8	0.8	5.5-9.5*
Conductivity	µS/cm	5	687	8450	4357	3849	2884	-
Turbidity	NTU	5	60	152	126	133	38	-
SS	mg/L	5	46	518	302	236	208	35*
Σ PAHs (16)	µg/L	5	1.002	2.740	1.778	1.726	0.638	-
MTBE	µg/L	5	<LOQ	12.0	2.4	<LOQ	5.4	-
TH	mg/L	5	<LOQ	0.92	0.56	0.58	0.34	10*
Site 2: self-service carwash								
COD	mg/L	5	80	421	239	185	145	125*
Tot-P	mg/L	5	4.0	99	28	5.4	41	10*
Tot-N	mg/L	5	6	14	9	8	3	30*
pH	-	5	8.6	9.6	9.1	9.2	0.4	5.5-9.5*
Conductivity	µS/cm	5	562	2880	1457	1273	958	-
Turbidity	NTU	5	42	203	100	80	68	-
SS	mg/L	5	35	223	130	124	67	35*
Σ PAHs (16)	µg/L	5	0.016	0.826	0.372	0.361	0.318	-
MTBE	µg/L	5	<LOQ	1.5	0.3	<LOQ	0.7	-
TH	mg/L	5	<LOQ	0.12	0.02	<LOQ	0.05	10*
Site 3: petrol station carwash								
COD	mg/L	5	144	301	227	235	59	125*
Tot-P	mg/L	5	0.3	0.8	0.5	0.5	0.2	10*
Tot-N	mg/L	5	6	13	10	9	3	30*
pH	-	5	6.7	7.5	7.0	7.1	0.3	5.5-9.5*
Conductivity	µS/cm	5	254	638	490	523	153	-
Turbidity	NTU	5	23	43	32	27	9	-
SS	mg/L	5	13	90	45	51	32	35*
Σ PAHs (16)	µg/L	5	0.101	0.731	0.319	0.170	0.276	-
MTBE	µg/L	5	<LOQ	1.3	0.3	<LOQ	0.6	-
TH	mg/L	5	<LOQ	0.24	0.09	0.11	0.10	10*
Site A: subway wash station								
COD	mg/L	5	38	1790	626	51	1008	125*
Tot-P	mg/L	5	0.7	42	14	0.8	24	10*
Tot-N	mg/L	5	5	22	13	11	9	30*
pH	-	5	8.5	10.1	9.3	9.2	0.8	5.5-9.5*
Conductivity	µS/cm	5	230	1906	790	234	966	-
Turbidity	NTU	5	28	870	319	59	478	-
SS	mg/L	5	20	790	297	81	428	35*
Σ PAHs (16)	µg/L	5			<LOQ			-
MTBE	µg/L	5			<LOQ			-
TH	mg/L	5			<LOQ			10*
Site E: bus wash station								
COD	mg/L	5	285	349	317	317	45	125*
Tot-P	mg/L	5	0.2	0.3	0.2	0.2	0.1	10*
Tot-N	mg/L	5	<10	<10	<10	<10	<10	30*
pH	-	5	7.0	7.4	7.2	7.2	0.3	5.5-9.5*
Conductivity	µS/cm	5	222	540	381	381	225	-
Turbidity	NTU	5	58.6	79	68.8	68.8	14.4	-
SS	mg/L	5	73	77	75	75	3	35*
Σ PAHs (16)	µg/L	5			0.037			-
MTBE	µg/L	5			<LOQ			-
TH	mg/L	5			0.47			10*

Figure 1. Pre-treatment diagram.

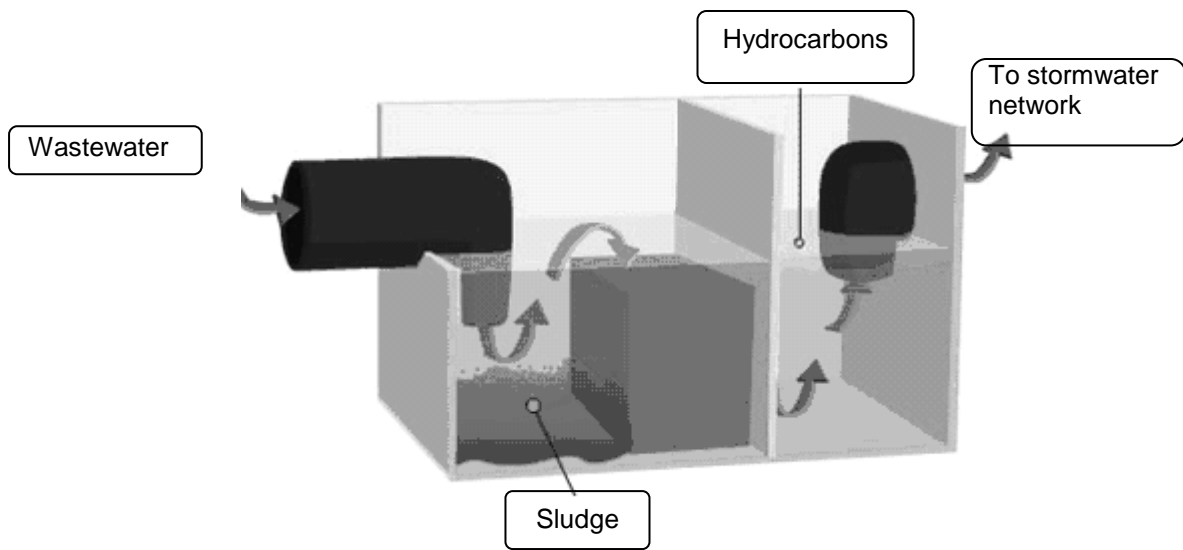


Figure 2. Location of sampling sites.

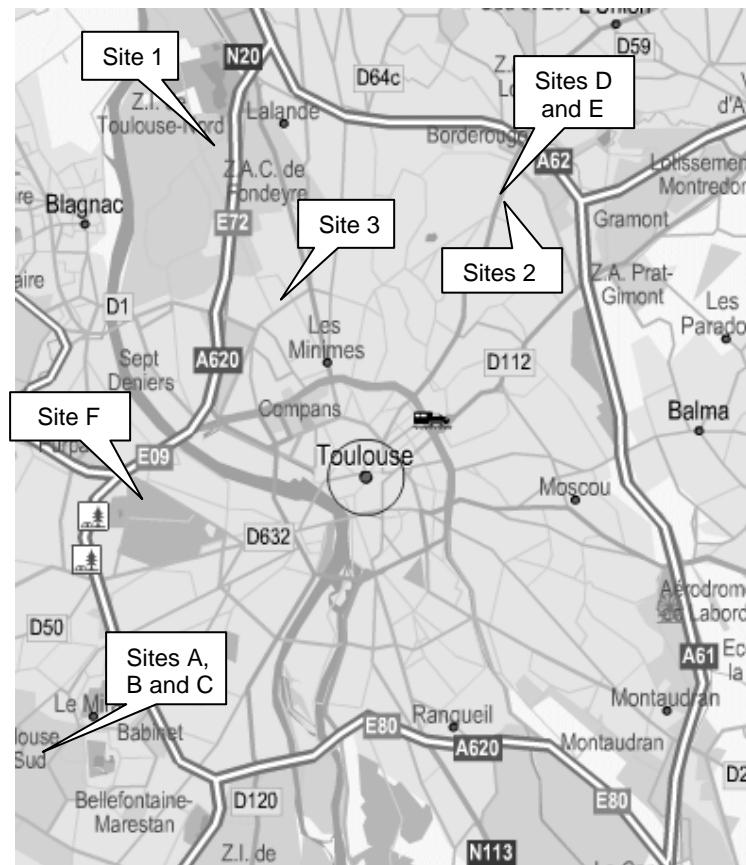


Figure 3. Biodegradability curve of subway wash effluent.

