



HAL
open science

Soil properties mapping at the field scale from DC landscape survey sensor

Arlène Besson, Maud Seger, Guillaume Giot, Isabelle I. Cousin

► **To cite this version:**

Arlène Besson, Maud Seger, Guillaume Giot, Isabelle I. Cousin. Soil properties mapping at the field scale from DC landscape survey sensor. EGU General Assembly 2011, Apr 2011, Vienne, Austria. Copernicus Publications, Geophysical Research Abstracts, 13, 2011, . hal-02748440

HAL Id: hal-02748440

<https://hal.inrae.fr/hal-02748440>

Submitted on 3 Jun 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Soil properties mapping at the field scale from DC landscape survey sensor

Vienna | Austria | 03 – 08 April 2011

A. Besson (1,2), M. Séger (1), G. Giot (1) and I. Cousin (1)

(1) Soil Science Unit, UR0272, INRA centre d'Orléans, avenue de la Pomme de Pin, CS 40001, Ardon, 45075 Orléans cedex 2, France (arlene.besson@orleans.inra.fr)


(2) UMR LISAH, INRA centre de Montpellier, place Viala, 34060 Montpellier cedex 2, France

Introduction

Soils are complex media whose properties can have a strong spatial variability. At the field scale when usual practises of characterization, as soil sampling, give only a rough idea on the real in-field variability, non destructive geophysical methods can overcome this difficulty from high density of measurements. These methods are also time-efficient. However data interpretation in term of soil properties is not straightforward. This requires a processing workflow developed here, from a DC dataset.

DC landscape survey sensor

Direct Current (DC) method enables to measure electrical resistivity (ER, ohm m) of soils. Its basic principle relies on an electrical current at low signal frequency generating into soil by electrodes.



- ✓ dGPS system
- ✓ Resistivity meter
- ✓ Control in real time

- High spatial resolution
- Small acquisition time
- 3 apparent soil layers
- Non destructive
- Useable for ploughed soils...

One electrode V-shape system
(contact improved) (noise restricted)



A technique adapted for field prospecting is the **MultiContinuous Electrical Profiling (MuCEP)**. It is a mobile soil electrical resistivity mapping system which comprises a multi-probe system towed by a cross-country vehicle. It cover a large area in few time and measure field resistivity at high resolution. (ARP patented, Geocarta society, Paris, France)



Processing workflow

Geophysical measurements (resistivity: ER)

- Raw ER at three apparent depths
- 52000 data/ plot of 5 ha
- Median smoothing and filtering

Soil sampling

- Local soil cores (n=30)
- Local soil properties (n=30)

Ancillary dataset

- Soil layering-soil depth measured locally
- Local Vertical Electrical Sounding (VES 1D)

Inverse modelling process

- **1D inversion** (QWinv1DN, Tabbagh, 2004)
- Two ER layers
 - o Initial ER values given by 1D sounding
 - o Layering depth fixed

Calibration

- **Statistical analysis** (PCA, standard regression)
- Transfer function development:
ER=f(soil properties)

Mapping process


- **Spatial interpolation** of soil properties from ER by transfer function inversion

Validation

- Analysis of estimated properties versus measured properties
- RMSE calculation

Iterations

An exemple of a soil property mapping from DC (soil bulk density map)

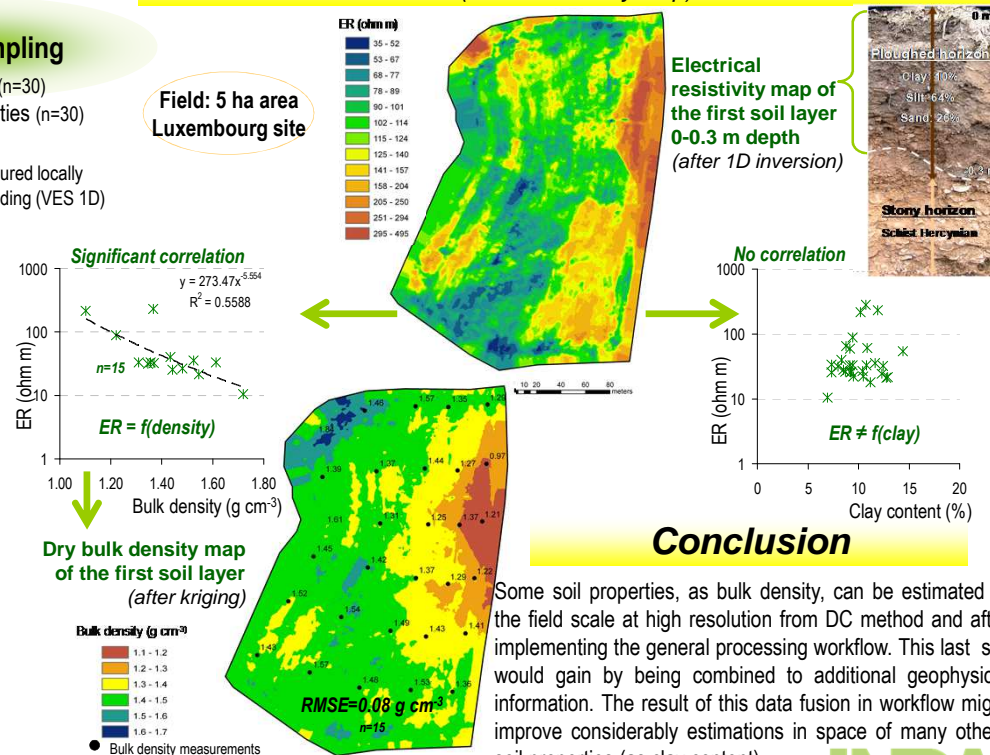

Conclusion

Some soil properties, as bulk density, can be estimated at the field scale at high resolution from DC method and after implementing the general processing workflow. This last still would gain by being combined to additional geophysical information. The result of this data fusion in workflow might improve considerably estimations in space of many others soil properties (as clay content).

This work was part of **DIGISOIL** project and financed by the European Commission under the 7th Framework Programme for Research and Technological Development, Area "Environment", Activity 6.3 "Environmental Technologies".

