



# Direct forcing immersed boundary methods: Improvements to the ghost-cell method

Antoine Michael Diego Jost, Stéphane Glockner

## ► To cite this version:

Antoine Michael Diego Jost, Stéphane Glockner. Direct forcing immersed boundary methods: Improvements to the ghost-cell method. *Journal of Computational Physics*, 2021, 438, 10.1016/j.jcp.2021.110371 . hal-03297151

**HAL Id: hal-03297151**

**<https://hal.inrae.fr/hal-03297151>**

Submitted on 9 May 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial 4.0 International License

# Direct forcing immersed boundary methods: Improvements to the Ghost-Cell Method

Antoine Michael Diego Jost\* and Stéphane Glockner

*Bordeaux INP, University of Bordeaux, CNRS, Art et Métiers Institute of Technology, INRAE, I2M Bordeaux, F-33400 Talence, France*

April 21, 2021

---

## Abstract

The ghost-cell immersed boundary methods (IBMs) are widely used to implement boundary conditions on non-body fitted grids. It has been previously shown that they have two major drawbacks. Firstly, these methods tend to have a maximum stencil size larger than 1, yielding non-band matrices. Secondly, for a maximum stencil size of 2 the ghost-cell linear IBM [1] have a first-order convergence rate for Neumann immersed boundary conditions. To address these two shortcomings and in the pursuit of increased accuracy and increased order of convergence the current article proposes the linear/quadratic square shifting methods for the ghost-cell IBM for Cartesian grids. The linear square shifting method guarantees a maximum stencil size of 1 and also improves the accuracy and convergence while the quadratic square shifting method improves the accuracy and convergence while maintaining the same stencil size of 2 as the original linear method [1]. The quadratic ghost-cell method [2, 3] further improves the accuracy and convergence whilst maintaining a maximum stencil size of 3 while the currently proposed quadratic square shifting method makes it possible to increase the Lagrange polynomial interpolation order whilst maintaining a maximum stencil of 2 resulting in an improved order of convergence for Neumann immersed boundary conditions. The proposed methods are evaluated by considering their accuracy and convergence thanks to a comprehensive verification and validation process. Firstly, the canonical verification 2D and 3D Poisson test problems for various analytical solutions and immersed boundaries are considered and are followed by various verification and validation test cases for the Navier-Stokes governing equations, with and without heat transfer, in 2D and 3D.

*Keywords:* Immersed boundary method, Direct forcing, Ghost-cell method, Discretization stencil, Poisson problem, Incompressible Navier-Stokes

---

\*Corresponding author.

E-mail addresses: [antoine.jost@u-bordeaux.fr](mailto:antoine.jost@u-bordeaux.fr)(AMD. Jost), [glockner@bordeaux-inp.fr](mailto:glockner@bordeaux-inp.fr)(S. Glockner)

# 1 Introduction

Immersed boundary methods (IBMs) first developed by Peskin [4] to simulate heart valves are widely used in numerical simulations involving complex geometries and/or interfaces between fluids or between fluids and solids, including fluid-structure interactions. The term IBM refers to any method that solves the discretized governing equations, such as the Navier-Stokes equations or the heat transfer equation, on grids that do not conform to the boundary of the immersed boundary i.e. non-body fitted grids. The term boundary does not include the domain boundaries and instead encompasses the boundary between a fluid and a complex-shaped solid and/or between a moving rigid solid and the surrounding fluid. By extension it also characterizes the interface between fluids and/or flexible solids and solid/liquid phase change encountered in multiphase flows. As such, it is understood that an IBM handles boundary or interface conditions which are not well posed for a particular grid cell as the grid does not match the given boundary or interface. IBMs have been used and are expected to be extensively used in the foreseeable future for a wide range of scientific and engineering disciplines, applied mathematics, computational fluid dynamics, biology, chemistry engineering, aerospace, etc. and the reader is encouraged to refer to more comprehensive reviews of the subject [5–10]. As IBMs can use Cartesian and rectilinear grids, regardless of the complexity of the geometry, some of the advantages associated with these methods are significantly simplified grid generation, sustained grid quality (and complexity), and stationary nondeforming grids for moving geometries (i.e. no-remeshing) [5]. These qualities become increasingly more advantageous as the underlying physics of the problem increases.

Depending on the approach followed to implement the immersed boundary conditions (IBCs), the IBMs are divided into either the continuous or the discrete forcing method [5]. On the one hand the continuous forcing method implements the IBCs through a source term, denoted as *forcing function*, in the non-discretized governing equations [5]. This approach encompasses to the original method proposed by Peskin to handle elastic solids [4], the density-scaled continuum surface force model proposed by Brackbill *et al.* [11] to deal with the surface tension, or the source-based method used to simulate the temperature fields for melting solidification phase change processes [12] and further adopted to simulate diffusion-controlled dissolution and solidification [13]. On the other hand, the discrete forcing method imposes the IBCs through modifications to the discretized governing equations. There is a great depth of work and knowledge focused on solving the constant or variable coefficient Poisson equation with the immersed interface approach, with or without jump condition. It is involved in a large variety of phenomena, such as the Stefan problem encountered in phase change or the pressure jump condition in multiphase flow. As immersed interfaces are not the scope of the current article, the reader is encouraged to refer more comprehensive works [14–24]. Over the years, several types of methods have been proposed to implement the boundary conditions in the direct forcing approach. One such method is the cut-cell method. This type of method is based on the finite volume discretization approach and requires a reshaping of the cell control volume in the vicinity of the immersed boundary. This reshaping is either a local reduction or a local increase in the volume of the cells. As such, the underlying conservative laws (e.g. Navier-Stokes equations) are solved throughout the domain, including the cells adjacent to the immersed boundary [25–27]. Another class of methods, also based on the finite volume integration, smoothly extends the solution at the ghost-cells to the interior domain [28–30]. This solution is then used to compute the fluxes of the cut-faces, while integration of the boundary condition is done on a sub-mesh boundary. Bochkov and Gibou [30] have shown that this method results in a second-order convergence of the solution and its gradients. This method has also been extended

to complex geometries and can efficiently handle boundaries with kinks [30]. Finally, similar to the implementation of the domain boundary conditions, the ghost-cell *linear* method proposed by Mittal *et al.* [1] applies the immersed boundary condition at the midpoint of the ghost-cells and their reflection about the immersed boundary. These latter points are denoted as image points and the values of the flow variables at these points are interpolated from the solution. This method is widely used and has been applied to both incompressible and compressible flows around complex fixed or moving bodies [31–35]. Some notable applications of this method include computational modeling of human biology such the physics of heart murmurs [36] or cellular-scale blood flow [37], the modeling of animal motion such as bioinspired swimming simulations [38,39], and wing-body interaction of insect forward flight [40]. As such, this method is the scope of the current article. In addition to the widely used method proposed by Mittal *et al.* [1], different ghost-cell based direct forcing approaches have been proposed. Of these, the method proposed by Coco and Russo for elliptic problem [41] and extended to Navier-Stokes and moving domains [42] are worth mentioning, given their versatility to handle complex shapes and that their method’s order of convergence is not dependent on a finite difference method used at the immersed boundary.

Picot and Glockner [43] showed that the stencil sizes of the ghost-cell linear method increases with rectilinear grids, which is of significant importance as it greatly affects the accuracy of the results and the performances of the linear solvers. Although the *linear shifted* method proposed by [43] significantly reduces the stencil size for rectilinear grids, these proposed improvements are not applicable to Cartesian grids, for which the linear shifted method cannot be differentiated from the linear method proposed by Mittal *et al.* [1]. This article fills the gap and focuses on improvements to the linear method for Cartesian grids that could potentially be extended to the shifted linear method [43] for rectilinear grids.

Although the extensively used linear method of Mittal *et al.* [1] uses one probe point to implement the IBCs, various other IBMs that use two probe points have been proposed. Sandberg and Jones [44] and Luo *et al.* [45] used two image points to evaluate the wall-normal derivatives of the fluid variables while Das *et al.* [2,3] used two fluid cell values and two image points to implement the Dirichlet and Neumann IBCs, respectively. Limited information of the density flow field at the immersed boundary led Dhamankar *et al.* [46] to use a different number of image points based on the flow variables. Two image points were used for the linear extrapolation of density whilst only one image point was used for the velocity flow field. The use of two image points to evaluate the Dirichlet and Neumann IBCs was also pursued by Chi *et al.* [47] and Auguste *et al.* [48]. It should be noted that despite the use of quadratic methods for both Dirichlet and Neumann IBCs, to the knowledge of the authors no comprehensive analysis (stencil size, increase in accuracy, computational performance, etc.) of these methods has been pursued.

To address the shortcomings of the linear method for Cartesian grids and the analysis of the quadratic methods, in this article we propose two IBMs to reduce the stencil requirements for square/cubic cells, a quadratic interpolation method with a reduced stencil size, and we perform a comprehensive analysis of the effect of quadratic interpolations for Dirichlet and Neumann IBCs. This article is organized as follows. Section 2 presents the canonical Poisson verification test problem and numerical discretization methods and is followed by an overview of the linear method [1]. In Section 3 the currently proposed *linear square shift* method that decreases the maximum stencil size obtained with the linear method for Cartesian grids is presented and is followed by a discussion on the proposed *quadratic square shift* method in Section 4, that further increases the accuracy of the linear and linear square shift methods. Numerical results for the canonical 2D and 3D verification test problems for the linear square shift method and the various proposed improvements

are subsequently presented in Section 5. Section 6 focuses on the Navier-Stokes equations, with and without the energy governing equation, and presents various 3D validation cases and discusses the results obtained with various IBMs. Lastly, Section 7 presents the conclusions.

In the spirit of reproducibility, the currently proposed methods and the various verification and validation test cases considered are in the massively parallel incompressible open-source CFD code Notus [43, 49–51].

## 2 Immersed Boundary Method for the Poisson Problem

In this section the finite-difference direct forcing and numerical discretization schemes are presented. For the sake of clarity, the discussions are focused on the canonical 2D Poisson problem as the extensions to 3D and vector flow fields, such as velocity  $\vec{u}$ , are straightforward.

### 2.1 Poisson Problem

Figure 1(a) shows an immersed boundary  $\Gamma$  that divides the 2D computational domain  $\Omega \subset \mathbb{R}^2$  into an inner domain  $\Omega_i$  and an outer domain  $\Omega_o$ . As a result, the constant coefficient Poisson problem for a scalar field  $\phi$  with a source field  $f$  consists in

$$\begin{aligned} \Delta\phi &= f, & \text{in } \Omega_i, \\ \phi &= 0, & \text{in } \Omega_o, \\ \phi &= \phi_D, & \text{on } \partial\Omega_D \cup \Gamma_D, \\ \frac{\partial\phi}{\partial n} &= \phi_N, & \text{on } \partial\Omega_N \cup \Gamma_N, \end{aligned} \tag{1}$$

where  $\partial\Omega$  and  $\Gamma$  are split into the Dirichlet and Neumann parts, and  $\phi_D$  and  $\phi_N$  are the known Dirichlet and Neumann boundary conditions, respectively.

### 2.2 Numerical Methods

As shown in Figure 1(b), the computational domain is discretized, with a finite volume method approach, into a Cartesian grid of size  $m \times n$  with  $\Delta h_\iota$  being the cell size in direction  $\iota$  and is constant throughout the domain. The domain boundary conditions are implemented through  $c$  domain ghost-cells at each domain boundary such that the grid size becomes  $(m + 2c) \times (n + 2c)$ . Although the current article focuses on Cartesian grids, for sake of completeness the proposed methods are presented for the general case of rectilinear grids.

The discretized inner domain is solely composed of inner-cells while, as seen from Figure 1(b), the discretized outer domain  $\Omega_o$  is further divided into ghost and outer-cells. A ghost-cell is a cell  $\mathbf{X}_{i,j}$  in  $\Omega_o$  such that at-least one of its non-diagonal neighboring cells is an inner-cell while an outer-cell is a cell in  $\Omega_o$  whose non-diagonal neighbors are in  $\Omega_o$ . For 2D computational domains, a cell  $\mathbf{X}_{i,j}$  in  $\Omega_o$  is considered a ghost-cell if  $\{\mathbf{X}_{i+1,j}, \mathbf{X}_{i-1,j}, \mathbf{X}_{i,j+1}, \mathbf{X}_{i,j-1}\} \cap \Omega_i \neq \emptyset$ .

The standard second-order central difference is used to discretize equation (1) over the inner computational domain yielding

$$\frac{\Phi_{i+1,j} - 2\Phi_{i,j} + \Phi_{i-1,j}}{\Delta h_x^2} + \frac{\Phi_{i,j+1} - 2\Phi_{i,j} + \Phi_{i,j-1}}{\Delta h_y^2} = F_{i,j} + O(\Delta h^2), \tag{2}$$

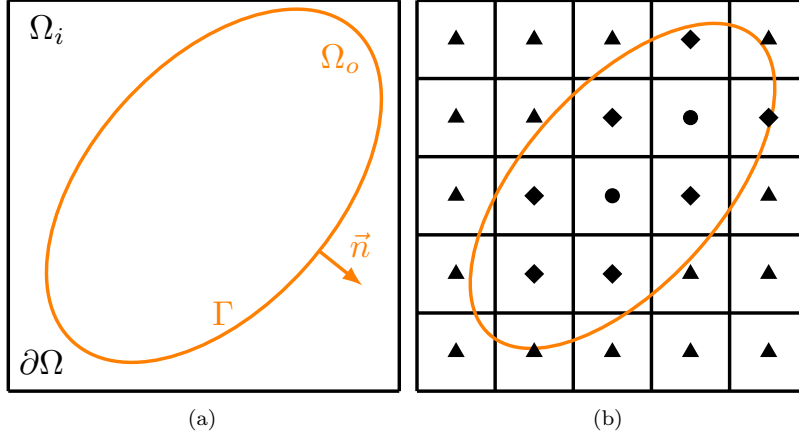


Figure 1: (a) Inner and outer computational domains,  $\Omega_i$  and  $\Omega_o$ , respectively, for an immersed boundary  $\Gamma$  with an outward pointing local surface unit normal  $\vec{n}$  and domain boundary conditions  $\partial\Omega$ . (b) Finite volume discretization of (a) and classification of cells into inner (triangle), outer (circle), and ghost (diamond) cells.

where  $\Phi_{i,j} = \phi(\mathbf{X}_{i,j})$ ,  $F_{i,j} = f(\mathbf{X}_{i,j})$ , and  $\Delta h = \max(\Delta h_l)$ . Taking into account the domain and immersed boundary conditions, equation (2) is rewritten in matrix form as

$$\left( (L + E + G + O)\Phi \right)_{i,j} = F_{i,j} + B_{i,j} + R_{i,j}, \quad (3)$$

where  $L$  is the coefficient matrix for the matrix form of equation (2) without boundary conditions,  $E$  is the coefficient matrix that takes into account the boundary conditions,  $G$  and  $O$  are the coefficient matrices that take into account the IBCs (ghost and outer-cells, respectively),  $B_{i,j}$  contains the boundary condition values, and  $R_{i,j}$  is the truncation term for the IBCs (presented in subsequent sections) and the spatial discretization of equation (2). It should be noted that  $F_{i,j} + B_{i,j} + R_{i,j} = 0$  and  $\Phi_{i,j}$  is equal to the trivial solution of zero  $\forall (i,j) \in C_o$ , where  $C_o$  is the set of outer-cell indices. Removing the truncation term from equation (3) results in the closed linear system evaluated for the numerical solution  $\hat{\Phi}_{i,j} \forall (i,j) \in C_{igo}$ , where  $C_{igo}$  is the set of inner, ghost, and outer-cell indices.

### 2.3 Linear Method

For an accurate implementation of the linear IBM at a ghost-cell  $\mathbf{X}_{i,j}$ , the scalar field value at the normal reflection of  $\mathbf{X}_{i,j}$  about  $\Gamma$ , denoted as the image point  $\mathbf{x}_{IP}$ , the Euclidean distances  $\Delta l = \|\mathbf{x}_{IP} - \mathbf{X}_{i,j}\|_2$  and  $\Delta l_h = \Delta l/2 = \|\mathbf{x}_{BI} - \mathbf{X}_{i,j}\|_2$ , the boundary condition at the boundary intercept  $\mathbf{x}_{BI}$  (the intersection point of the line segment  $[\mathbf{X}_{i,j}, \mathbf{x}_{IP}]$  and  $\Gamma$ ), and the local surface unit normal  $\vec{n}$  of  $\Gamma$  at  $\mathbf{x}_{BI}$  are needed. Figure 2 shows representative locations of these supplemental data points relative to each other.

The linear method implements the IBCs along the linear segment  $[\mathbf{X}_{i,j}, \mathbf{x}_{IP}]$  using second-order linear approximations and second-order central difference for Dirichlet and Neumann boundary conditions, respectively. As the image point is a normal reflection of the ghost-cell about the boundary point, the Dirichlet boundary condition follows

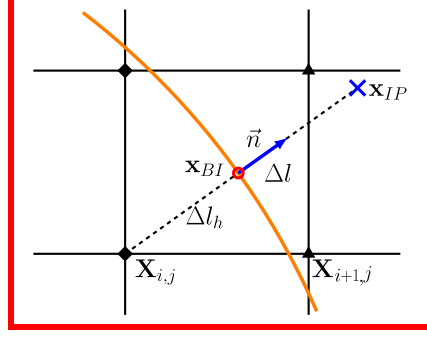


Figure 2: Close up view of supplemental data points and values required for the linear method for a sample ghost-cell  $\mathbf{X}_{i,j}$ .  $BI$ : Boundary intercept;  $IP$ : Image point;  $\vec{n}$ : local surface unit normal;  $\Delta l = \|\mathbf{x}_{IP} - \mathbf{X}_{i,j}\|_2$ ;  $\Delta l_h = \|\mathbf{X}_{i,j} - \mathbf{x}_{BI}\|_2 = \|\mathbf{x}_{IP} - \mathbf{x}_{BI}\|_2$ .

$$\phi_{BI} = \frac{\Phi_{i,j} + \phi_{IP}}{2} + O(\Delta l_h^2), \quad (4)$$

where  $\phi_\chi = \phi(\mathbf{x}_\chi)$  is the exact scalar field value of  $\phi$  at  $\mathbf{x}_\chi$ . The Neumann boundary condition is given by

$$\left(\frac{\partial \phi}{\partial n}\right)_{BI} = \frac{\phi_{IP} - \Phi_{i,j}}{\Delta l} + O(\Delta l_h^2), \quad (5)$$

where  $(\partial \phi / \partial n)_{BI} = \partial(\phi(\mathbf{x}_{BI})) / \partial n$  is the exact derivative of the scalar field at  $\mathbf{x}_{BI}$ . As shown in Figure 2, the location of the IP may not coincide with  $\mathbf{X}_{i,j} \forall (i,j) \in \Omega_i$  and therefore the value at  $\mathbf{x}_{IP}$  is obtained through a  $p$ -th order Lagrange interpolation using the scalar field values of the surrounding cells following

$$\phi_{IP} = \sum_{(i,j) \in I_P} \rho_{i,j} \Phi_{i,j} + O(\Delta h^p), \quad (6)$$

where  $\rho_{i,j}$  are the interpolation coefficients and  $I_P$  is the set of interpolation indices that may include the ghost-cell value  $\Phi_{i,j}$  and excludes any outer-cells. The set of interpolation indices satisfies the two constraints of (1) not containing any outer cells and (2) containing the ghost-cell value  $\Phi_{i,j}$ . To satisfy these constraints the method pursued by [43] is currently used. A comprehensive discussions on the validity of the set of interpolation indices is found in [43]. This consists in a square set of cells of size  $p - 1$ , where  $p$  is the order of the Lagrange interpolation. The first cell corner of the interpolation set corresponds to the cell surrounding the image point, and the opposite corner is in the opposite direction given by the normal to the boundary  $\vec{n}$ . It should be noted that unlike previously proposed IBMs [41, 52], the current approach does not consistently satisfy the first constraint for a given mesh resolution for the *hollow case problem*. Following the approach in [43] to overcome this limitation the resolution around the immersed boundary is increased. The second constraint is consistently satisfied.

Combining equations (4) to (6) results in the following discretized numerical approximations of

the boundary conditions

$$\begin{aligned}\phi_{BI} &= \frac{1}{2} \left( \sum_{(i,j) \in I_{IP}} \rho_{i,j} \Phi_{i,j} + \Phi_{i,j} \right) + O(\Delta l_h^2) + O(\Delta h^p), \\ \left( \frac{\partial \phi}{\partial n} \right)_{BI} &= \frac{1}{\Delta l} \left( \sum_{(i,j) \in I_{IP}} \rho_{i,j} \Phi_{i,j} - \Phi_{i,j} \right) + O(\Delta l_h^2) + O(\Delta h^{p-1}).\end{aligned}\tag{7}$$

One of the major drawbacks of the linear IBM is the need for a large discretization stencil, even for cell size ratios  $a = \Delta h / \Delta \mu = 1$ , where  $\Delta \mu = \min(\Delta h_l)$ . The stencil size measurement metrics presented in [43] are also used in this article: Figure 3 shows the domains for the stencil sizes of 1 and 2. Picot and Glockner [43] showed that for the linear method for a cell size ratio  $a=1$  (Cartesian grids) and a second-order Lagrange interpolation ( $p=2$ ) the maximum stencil size is 2, as shown in Figure 4, which is larger than the stencil size for second-order central difference of the Laplacian operator. As IBMs rely heavily on Cartesian grids with adaptive mesh refinement (AMR) to resolve flow features with large gradients, such as boundary layers, and geometrical features with large curvatures, such as the leading and trailing edges of wings, reducing the stencil size of the method to 1 may improve the precision and reduce the computational effort. Moreover, as seen from equation (7) for Neumann IBC  $p=2$  results in a first-order convergence. To obtain a second-order convergence,  $p=3$  is required which yields a stencil size of 3.

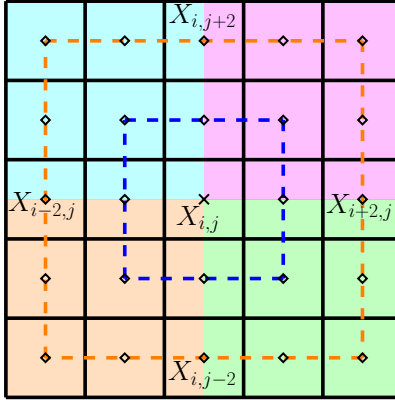


Figure 3: Interpolation quadrants (colored regions) and domains around  $\mathbf{X}_{i,j}$  of stencil size 1 and 2. Dashed blue line: stencil size of 1; Dashed orange line: stencil size of 2; Red region: Q1 interpolation quadrant; Blue region: Q2 interpolation quadrant; Orange region: Q3 interpolation quadrant; Green region: Q4 interpolation quadrant.

### 3 Linear Square Shifting Method

Despite the stencil size improvements of the shifted linear method for rectilinear grids [43], this method reverts back to the linear method for Cartesian grids and therefore does not address the reduction of the stencil size for square/cubic cells.

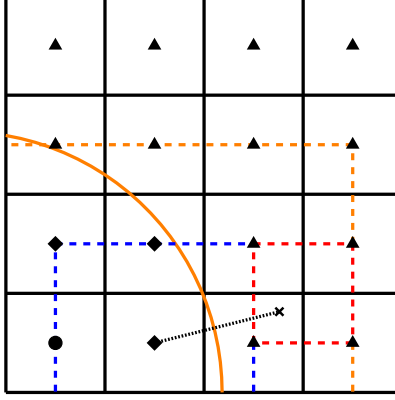


Figure 4: Close up view of an image point interpolation set and stencil size for a ghost-cell for Cartesian grids. Solid orange line:  $\Gamma$ ; Dashed blue line: stencil size of 1; Dashed orange line: stencil size of 2; Dashed red line: interpolation set for enclosed image point; Black diamond: ghost-cell; Black circle: outer-cell; Black triangle: inner-cell; Black  $\times$ : image point.

The currently proposed square/cubic shifting method, denoted as *linear square shift*, with its several variations presented in this section focus on decreasing the maximum stencil sizes for Cartesian grids through various methods. Modifications to the IBM result in a set of supplemental interpolated data points needed for the proper implementation of the IBCs. For sake of clarity the various modified supplemental data points and values required for the linear square shift method are shown in Figure 5 and are defined, in a staggered manner, in the subsequent sections.

### 3.1 Quadrant Intersection Point

As shown in Figure 5, for a ghost-cell with a stencil size of 2 the intersection of the line segment  $[\mathbf{X}_{i,j}, \mathbf{x}_{IP}]$  and the domain of stencil size of 1 corresponds to the quadrant intersection point (QIP)  $\mathbf{x}_{QIP}$ . In fact  $\mathbf{x}_{QIP}$  is the upper threshold for a maximum stencil size of 1 and therefore any point located at  $\mathbf{x}_{QIP} + \alpha' \vec{n}$ , for  $\alpha' > 0$ , is at a stencil size larger than 1.

Consider the boundary intercept  $\mathbf{x}_{BI}$ , its local surface unit normal  $\vec{n}$ , and the four quadrants used to determine the set of interpolation indices for the boundary intercept  $x_{BI}$  [43]. The four quadrants, shown in Figure 3, are determined by  $\vec{n}=(n_x, n_y)$  and are

- Quadrant 1 (Q1):  $n_x \geq 0$  &  $n_y \geq 0$ ,
- Quadrant 2 (Q2):  $n_x < 0$  &  $n_y \geq 0$ ,
- Quadrant 3 (Q3):  $n_x < 0$  &  $n_y < 0$ ,
- Quadrant 4 (Q4):  $n_x \geq 0$  &  $n_y < 0$ .

As the relative location of  $\mathbf{x}_{QIP}$ , and not its absolute location, is necessary to calculate  $\|\mathbf{x}_{BI} - \mathbf{x}_{QIP}\|_2$  for the linear square shift method, Q2 to Q4 may be subsequently transformed into Q1. This change in coordinate direction simplifies the algorithm used to determine the  $\mathbf{x}_{QIP}$ . As seen

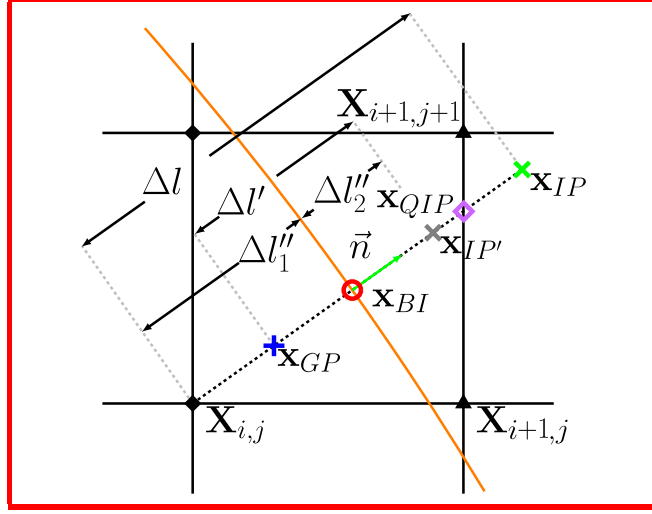


Figure 5: Close up view of the supplemental data points and values required for the linear (L) and linear square shift methods for a sample ghost-cell  $\mathbf{X}_{i,j}$ .  $\mathbf{x}_{GP}$ : ghost point (ghost-cell shift);  $\mathbf{x}_{IP}$ : image point (L);  $\mathbf{x}_{IP'}$ : image point (ghost-cell shift);  $\mathbf{x}_{IP''}$  (not shown): image point (image point shift) and  $\mathbf{x}_{IP''} = \mathbf{x}_{IP'}$  in this figure;  $\mathbf{x}_{QIP}$ : quadrant intersection point;  $\Delta l$ :  $\|\mathbf{X}_{i,j} - \mathbf{x}_{IP}\|_2$  (L);  $\Delta l'$ :  $\|\mathbf{x}_{GP} - \mathbf{x}_{IP'}\|_2$  (ghost-cell shift);  $\Delta l''_1$ :  $\|\mathbf{X}_{i,j} - \mathbf{x}_{BI}\|_2$  (image point shift);  $\Delta l''_2$ :  $\|\mathbf{x}_{BI} - \mathbf{x}_{IP''}\|_2$  (image point shift).

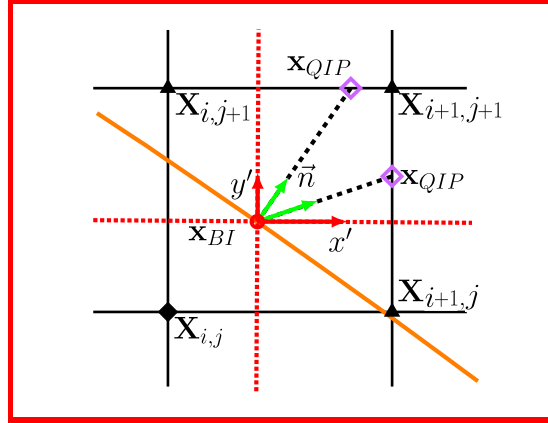


Figure 6: Close up view of possible quadrant intersection points  $\mathbf{x}_{QIP}$  for Q1 interpolation quadrant for a sample boundary intercept  $\mathbf{x}_{BI}$ . Solid orange line:  $\Gamma$ ; Dotted red line: Local axis  $(x', y')$  with origin at  $\mathbf{x}_{BI}$ ; Solid green vector: sample local surface unit normal to intersect line segments  $[\mathbf{X}_{i,j+1}, \mathbf{X}_{i+1,j+1}]$  and  $[\mathbf{X}_{i+1,j+1}, \mathbf{X}_{i+1,j}]$ ; Black diamond: ghost-cell; Black triangle: inner-cell.

from Figure 6, in Q1 and for a local coordinate axis centered at  $\mathbf{x}_{BI}$ ,  $\mathbf{x}_{QIP}$  must lay on either the line segment  $[\mathbf{X}_{i+1,j}, \mathbf{X}_{i+1,j+1}]$  or the line segment  $[\mathbf{X}_{i,j+1}, \mathbf{X}_{i+1,j+1}]$ .

Two different approaches are currently pursued to maintain a maximum stencil size of 1, such that

$$\|\mathbf{X}_{i,j} - \mathbf{x}_{IP}\|_2 \leq \|\mathbf{X}_{i,j} - \mathbf{x}_{QIP}\|_2. \quad (8)$$

The first approach, denoted as *ghost-cell shift (GS)* shifts the ghost-cell such that the mirror image point satisfies equation (8), while the second approach satisfies equation (8) but solely shifting the image point and is called *image point shift (IS)*.

### 3.2 Ghost-Cell Shift (GS)

Considering the ghost-cell  $\mathbf{X}_{i,j}$ , defined in Section 2.2, and the quadrant intersection point  $\mathbf{x}_{QIP}$ , a supplemental interpolated ghost point  $\mathbf{x}_{GP}$  is defined as

$$\mathbf{x}_{GP} = \mathbf{x}_{BI} - s\vec{n}, \quad (9)$$

where  $s = \min\{\|\mathbf{x}_{BI} - \mathbf{X}_{i,j}\|_2, \alpha\|\mathbf{x}_{BI} - \mathbf{x}_{QIP}\|_2\}$ ,  $\|\mathbf{x}_{BI} - \mathbf{X}_{i,j}\|_2 = \Delta l_h$  as  $\mathbf{x}_{BI}$  is the midpoint of the line segment  $[\mathbf{X}_{i,j}, \mathbf{x}_{IP}]$ , and  $\alpha$  is a constant with a value between 0 and 1, inclusive. In this article we choose  $\alpha=1$ .

As seen from Figure 5, equation (9) shifts the ghost point  $\mathbf{x}_{GP}$  towards its boundary intercept  $\mathbf{x}_{BI}$  such that its image point  $\mathbf{x}_{IP'}$  is located inside Q1 with a maximum stencil size of 1. As the ghost-cell shift of the linear square shift method maintains  $\mathbf{x}_{BI}$  as the midpoint of the line segment  $[\mathbf{x}_{GP}, \mathbf{x}_{IP'}]$ , the general form of the discretized numerical approximations of the IBCs in equation (7) remains the same. However, as  $\mathbf{x}_{GP}$  is not a cell value, an additional  $p$ -th order Lagrange interpolation is required and results in a new set of IBCs that follow

$$\begin{aligned} \phi_{BI} &= \frac{1}{2} \left( \sum_{(i,j) \in I_{IP'}} \beta_{i,j} \Phi_{i,j} + \sum_{(i,j) \in I_{GP}} \gamma_{i,j} \Phi_{i,j} \right) + O(\Delta l_h'^2) + O(\Delta h^p), \\ \left( \frac{\partial \phi}{\partial n} \right)_{BI} &= \frac{1}{\Delta l'} \left( \sum_{(i,j) \in I_{IP'}} \beta_{i,j} \Phi_{i,j} - \sum_{(i,j) \in I_{GP}} \gamma_{i,j} \Phi_{i,j} \right) + O(\Delta l_h'^2) + O(\Delta h^{p-1}), \end{aligned} \quad (10)$$

where  $\Delta l_h' = \Delta l'/2$ ,  $\gamma_{i,j}$ , and  $\beta_{i,j}$  are the interpolation coefficients for the  $\mathbf{x}_{GP}$  and  $\mathbf{x}_{IP'}$ , respectively, and  $I_{GP}$  and  $I_{IP'}$  are the set of interpolation indices for  $\mathbf{x}_{GP}$  and  $\mathbf{x}_{IP'}$ , respectively. It should be noted that based on the definition of  $\mathbf{x}_{GP}$  in equation (9), a maximum stencil size of 1 is guaranteed for  $p=2$ . Similar to the linear method presented in Section 2.3 and as seen from equation (10),  $p=2$  results in second and first-order convergence for Dirichlet and Neumann IBCs, respectively. To obtain a second-order convergence for the latter IBC,  $p=3$  and its associated stencil size of 2 is required.

**Remark** It is interesting to notice that as  $\Delta l' \rightarrow 0$  ( $\alpha \rightarrow 0$ ), the ghost-cell shift of the linear square shift method becomes the IBM proposed by Coco and Russo [41], hereby denoted as *direct* method. Indeed, as at  $\Delta l'=0$ , the interpolation coefficients of the image and ghost points are the same and the Dirichlet IBC becomes

$$\phi_{BI} = \sum_{(i,j) \in I_{BI}} \rho_{i,j} \Phi_{i,j} + O(\Delta h^p), \quad (11)$$

which corresponds to the direct method.

For the Neumann IBC, as  $\Delta l' \rightarrow 0$  the error of the second-order central difference becomes increasingly negligible and the finite-difference approximation approaches the analytical partial differential equation  $\partial\phi/\partial n = \phi_n = \nabla\phi \cdot \vec{n}$ . Therefore, the Neumann IBC becomes

$$\left(\frac{\partial\phi}{\partial n}\right)_{BI} = \sum_{(i,j) \in I_{BI}} \left( \frac{\partial\rho_{i,j}}{\partial x} n_x + \frac{\partial\rho_{i,j}}{\partial y} n_y \right) \Phi_{i,j} + O(\Delta h^{p-1}), \quad (12)$$

which corresponds to the direct method.

### 3.3 Image Point Shift (IS)

Reductions to the maximum stencil size can also be achieved by solely shifting the location of the image point such that it is located inside Q1 for a stencil size of 1. Considering the image point  $\mathbf{x}_{IP}$ , defined in Section 2.3, and the quadrant intersection point  $\mathbf{x}_{QIP}$  a modified image point  $\mathbf{x}_{IP''}$  is defined as

$$\mathbf{x}_{IP''} = \mathbf{x}_{BI} + s' \vec{n}, \quad (13)$$

where  $s' = \min\{|\mathbf{x}_{BI} - \mathbf{x}_{IP}|_2, \alpha|\mathbf{x}_{BI} - \mathbf{x}_{QIP}|_2\}$  and  $\alpha$  is a constant with a value between 0 and 1, inclusive. In this article we choose  $\alpha=1$ . As seen from Figure 5, equation (9) shifts the image point  $\mathbf{x}_{IP}$  towards its boundary intercept  $\mathbf{x}_{BI}$  such that it is located inside Q1 with a maximum stencil size of 1 for  $p=2$ . This method differs from the ghost-cell shift method in that the ghost-cell  $\mathbf{X}_{i,j}$  is used and no supplemental ghost point  $\mathbf{x}_{GP}$  is required, and instead only the image point  $\mathbf{x}_{IP}$  is shifted to the new image point  $\mathbf{x}_{IP''}$  if it falls outside Q1.

In this method the boundary intercept  $\mathbf{x}_{BI}$  is no longer the midpoint of the line segment  $[\mathbf{X}_{i,j}, \mathbf{x}_{IP''}]$  and to take in account that  $\Delta l'_1 \neq \Delta l'_2$ , where  $\Delta l'_1 = |\mathbf{X}_{i,j} - \mathbf{x}_{BI}|_2$  and  $\Delta l'_2 = |\mathbf{x}_{BI} - \mathbf{x}_{IP''}|_2$ , linear interpolation is used to generalize equations (4) and (5) such that the generalized second-order Dirichlet boundary condition follows,

$$\phi_{BI} = \zeta \Phi_{i,j} + \eta \phi_{IP''} + O(\Delta l'_1 \Delta l'_2), \quad (14)$$

where  $\zeta = \Delta l'_2 / (\Delta l'_1 + \Delta l'_2)$  and  $\eta = \Delta l'_1 / (\Delta l'_1 + \Delta l'_2)$ . The generalized first-order Neumann boundary condition follows,

$$\left(\frac{\partial\phi}{\partial n}\right)_{BI} = \frac{\phi_{IP''} - \Phi_{i,j}}{\Delta l'_1 + \Delta l'_2} + O(\Delta l'_1 |(1 - r_{\Delta l})|) + O(\Delta l''_3), \quad (15)$$

where  $r_{\Delta l} = \Delta l'_2 / \Delta l'_1$  and has a values between 0 and 1, inclusive, and  $\Delta l''_3 = \Delta l''_1{}^2 |(r_{\Delta l}^2 - r_{\Delta l} + 1)|$ . Considering the generalized Dirichlet and Neumann boundary conditions, equations (14) and (15), respectively, the discretized numerical approximations of the IBCs for the image point shift of the linear square shift method follow

$$\begin{aligned} \phi_{BI} &= \zeta \Phi_{i,j} + \sum_{(i,j) \in I_{IP''}} \eta \beta_{i,j} \Phi_{i,j} + O(\Delta l'_1 \Delta l'_2) + O(\Delta h^p), \\ \left(\frac{\partial\phi}{\partial n}\right)_{BI} &= \frac{1}{\Delta l'_1 + \Delta l'_2} \left( \sum_{(i,j) \in I_{IP''}} \beta_{i,j} \Phi_{i,j} - \Phi_{i,j} \right) + O(\Delta l'_1 |(1 - r_{\Delta l})|) + O(\Delta l''_3) + O(\Delta h^{p-1}). \end{aligned} \quad (16)$$

Similar to the ghost-cell shift of the linear square shift, based on the definition of the  $\mathbf{x}_{IP''}$  in equation (13), a maximum stencil size of 1 is guaranteed for  $p=2$ . For  $p=2$  second and first-order convergence for Dirichlet and Neumann IBCs is expected. Unlike the linear method and ghost-cell shift previous presented, as seen from the leading error term in equation (16) for the image point shift  $p=3$  does not results in an increase in convergence order from first to second. For this shift, the leading error term is  $O(\Delta l_1''|(1 - r_{\Delta l})|)$ .

Table 1 summarizes the proposed linear ghost-cell methods.

| Method | Maximum Stencil Size | Exp. Convergence Order |             |
|--------|----------------------|------------------------|-------------|
|        |                      | Dirichlet IBC          | Neumann IBC |
| $p=2$  |                      |                        |             |
| L      | 2                    | 2                      | 1           |
| GS     | 1                    | 2                      | 1           |
| IS     | 1                    | 2                      | 1           |
| $p=3$  |                      |                        |             |
| L      | 3                    | 2                      | 2           |
| GS     | 2                    | 2                      | 2           |
| IS     | 2                    | 2                      | 1           |

Table 1: Maximum stencil sizes and expected order of convergence for the proposed linear ghost-cell methods with second and third-order Lagrange interpolations ( $p=2$  and 3, respectively) for the image points.

## 4 Quadratic Square Shifting Method

In this section accuracy improvements to the image and ghost square shift methods through quadratic interpolation, denoted as the *quadratic square shifting* method, are presented. Although quadratic interpolation to increase the accuracy of the ghost-cell interpolation has been previously implemented for Dirichlet and Neumann IBCs [2,3], as discussed in Section 1, a detailed analysis of these benefits and its use in conjunction with the square shift methods have not yet been pursued. Figure 7, shows representative locations for the supplemental data points, including the second image point  $\mathbf{x}_{IP2}$ , for the quadratic/quadratic square shifting method.

Considering the boundary intercept  $\mathbf{x}_{BI}$ , its local surface unit normal  $\vec{n}$ , and the image point  $\mathbf{x}_{IP}$ , the second image point  $\mathbf{x}_{IP2}$  required for the current quadratic interpolation follows

$$\mathbf{x}_{IP2} = \mathbf{x}_{BI} + 3\Delta l_h \vec{n}. \quad (17)$$

The generalized Dirichlet, equation (14), is extended to the quadratic method and becomes

$$\phi_{BI} = \lambda\phi_{IP2} + \eta\phi_{IP} + \zeta\Phi_{i,j} + O(\Delta l_h^3) + O(\Delta h^p), \quad (18)$$

where  $\zeta$ ,  $\eta$ , and  $\lambda$  are the coefficients obtained from the 1D  $p$ -th order Lagrange interpolation. The generalized Neumann boundary condition, equation (15), is extended to the quadratic method through the use of second-order one-sided finite-difference and 1D third-order Lagrange interpolation ( $p=3$ ) [3]. As the Neumann IBC at  $\mathbf{x}_{BI}$  are known, the second-order forward finite-difference, which follows

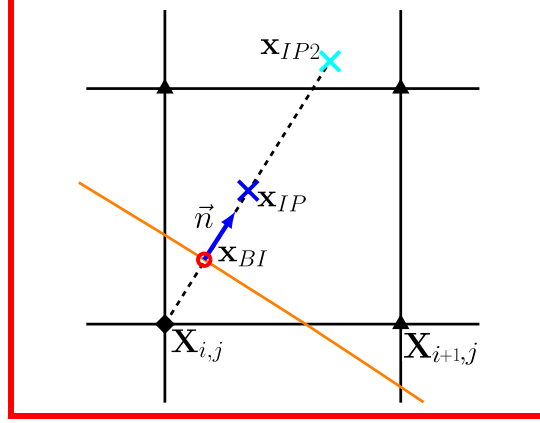


Figure 7: Close up view of the supplemental data points and values required for the quadratic methods for a sample ghost-cell  $\mathbf{X}_{i,j}$ . *BI*: Boundary intercept; *IP*: Image point; *IP2*: Second image point;  $\vec{n}$ : local surface unit normal.

$$\left(\frac{\partial\phi}{\partial n}\right)_{BI} = \frac{-\phi_{IP2}(\mathbf{x}_{IP} - \mathbf{x}_{BI})^2 + \phi_{IP}(\mathbf{x}_{IP2} - \mathbf{x}_{BI})^2 - \phi_{BI}[(\mathbf{x}_{IP2} - \mathbf{x}_{BI})^2 - (\mathbf{x}_{IP} - \mathbf{x}_{BI})^2]}{(\mathbf{x}_{IP} - \mathbf{x}_{BI})(\mathbf{x}_{IP2} - \mathbf{x}_{BI})(\mathbf{x}_{IP2} - \mathbf{x}_{IP})} + O(\Delta l_h^2), \quad (19)$$

is used to determine the value of the scalar field value at  $\mathbf{x}_{BI}$ , which is subsequently used to determine the value of the scalar field at the ghost-cell through equation (18). The discretized numerical approximations of the Dirichlet and Neumann IBCs therefore become

$$\begin{aligned} \phi_{BI} &= \sum_{(i,j) \in I_{IP2}} \lambda_{i,j} \Phi_{i,j} + \sum_{(i,j) \in I_{IP}} \eta_{i,j} \Phi_{i,j} + \zeta \Phi_{i,j} + O(\Delta l_h^3) + O(\Delta h^p), \\ \left(\frac{\partial\phi}{\partial n}\right)_{BI} &= \sigma \left( -[(\mathbf{x}_{IP2} - \mathbf{x}_{BI})^2 - (\mathbf{x}_{IP} - \mathbf{x}_{BI})^2] \phi_{BI} - \right. \\ &\quad \left. (\mathbf{x}_{IP} - \mathbf{x}_{BI})^2 \sum_{(i,j) \in I_{IP2}} \rho_{i,j} \Phi_{i,j} + (\mathbf{x}_{IP2} - \mathbf{x}_{BI})^2 \sum_{(i,j) \in I_{IP}} \beta_{i,j} \Phi_{i,j} \right) + O(\Delta l_h^2) + O(\Delta h^{p-1}), \end{aligned} \quad (20)$$

where  $\sigma = 1/(\mathbf{x}_{IP} - \mathbf{x}_{BI})(\mathbf{x}_{IP2} - \mathbf{x}_{BI})(\mathbf{x}_{IP2} - \mathbf{x}_{IP})$ .

As shown in Figure 8, a ghost-cell  $\mathbf{X}_{i,j}$  with a stencil size of 2 with the linear method may need a stencil size of 3 for the quadratic method. To maintain a maximum stencil size of 2, the quadratic square shifting method is proposed. This method uses the quadratic method in conjunction with the image point shift (solely for the second image point) such that

$$\mathbf{x}_{IP2} = \mathbf{x}_{BI} + s^* \vec{n}, \quad (21)$$

where  $s^* = \min\{||\mathbf{x}_{BI} - \mathbf{x}_{IP2}||_2, \alpha ||\mathbf{x}_{BI} - \mathbf{x}_{QIP2}||_2\}$ ,  $\mathbf{x}_{QIP2}$  is the QIP for a stencil size of 2 (shown as the dashed red region in Figure 8), and  $\alpha$  is a constant with a value between 0 and 1, inclusive. In this article we choose  $\alpha=1$ .

**Remark** The quadratic square shifting method does not always result in a stencil size larger than 1. It is possible that the Euclidean distance between the ghost-cell and boundary-intercept  $\Delta l_h$  is small enough such that  $\|\mathbf{x}_{IP2} - \mathbf{X}_{i,j}\|_2 \leq \|\mathbf{x}_{QIP} - \mathbf{X}_{i,j}\|_2$  resulting in identical interpolation indices for the first and second image points. The set of interpolation indices for the first and second image points may differ [2, 3, 45], potentially increasing the accuracy of the solution [46]. This is accomplished by again re-purposing the image point shift and using the following algorithm:

1.  $\|\mathbf{x}_{IP} - \mathbf{X}_{i,j+1}\|_c \leq 1$  &  $1 < \|\mathbf{x}_{IP2} - \mathbf{X}_{i,j+1}\|_c \leq 2$ ; **return**
2.  $\|\mathbf{x}_{IP} - \mathbf{X}_{i,j+1}\|_c \leq 1$  &  $\|\mathbf{x}_{IP2} - \mathbf{X}_{i,j+1}\|_c \leq 1$ 
  - $\mathbf{x}_{IP2} = \mathbf{x}_{BI} + s^{**}\mathbf{n}$ ,  $s^{**} = (2 - \alpha) \times \|\mathbf{x}_{BI} - \mathbf{x}_{QIP1}\|_2$ ;  $\alpha > 0$  and  $\alpha < 1$
3.  $1 < \|\mathbf{x}_{IP} - \mathbf{X}_{i,j+1}\|_c \leq 2$  &  $1 < \|\mathbf{x}_{IP2} - \mathbf{X}_{i,j+1}\|_c \leq 2$ 
  - $\mathbf{x}_{IP}$  follows equation (13)
  - $\mathbf{x}_{IP2}$  follows equation (21)

where the stencil norm  $\|x\|_c = \max\left\{\frac{|x|}{\Delta x_1}, \frac{|y|}{\Delta x_2}\right\}$  is used to determine the stencil as  $c_{i,j} = \max\{\|X_{k,l} - X_{i,j}\|_c \mid \forall(k,l) \in C_{ig}, L_{i,j}^{k,l} \neq 0\}$  [43].

As the definition of the second image point is based on the location of the boundary intercept, local surface unit normal, and first image point, the quadratic square shifting method is based on a straightforward integration of the quadratic and square shifting methods. To this end the appropriate boundary intercepts, first image points, and local surface unit normals associated with the ghost point/cell in the square shift method must be used in equations (17) to (21). Henceforth, and without any loss in comprehension, the quadratic square shifting method will be denoted as the quadratic method.

The quadratic method can be used in conjunction with the square shift methods and results in the QGS, QIS, and QISS1 methods. The QGS and QIS are obtained by combining the GS and IS methods, respectively, with the quadratic method. For a second-order Lagrange interpolation ( $p=2$ ) these two methods have a maximum stencil size of 2 with a stencil size of 1 for the first image point. The QISS1 method is based on the QIS method and also guarantees a maximum stencil size of 1 for the second image point. It should be noted that although  $p=3$  can be used to increase the order of convergence from first to second-order for Neumann IBC and second to third-order for Dirichlet IBC, the increase in the order of the Lagrange interpolation increases the stencil size by 1. Therefore all proposed quadratic methods, with the exception of QISS1, will have a stencil size of 3, whilst QISS1 will have a stencil size of 2. Table 2 summarizes the proposed quadratic ghost-cell methods.

## 5 Numerical Simulations for a Scalar Field

In this section the results of numerical simulations for the canonical 2D and 3D Poisson test problems with mixed domain boundary conditions and Dirichlet or Neumann IBCs for various immersed boundaries and IBMs are discussed. The nine IBMs used for the current verification and convergence studies are:

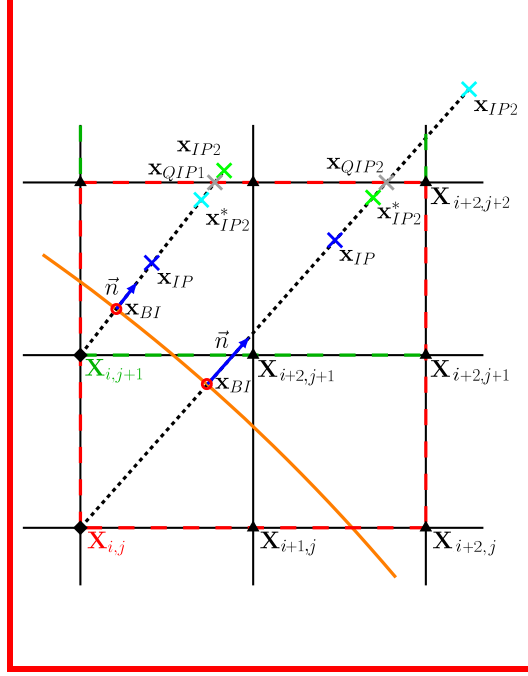


Figure 8: Close up view of the supplemental data points and values required for the quadratic square shift method for the sample ghost-cells  $\mathbf{X}_{i,j}$  and  $\mathbf{X}_{i,j+1}$ ;  $\mathbf{x}_{BI}$ : Boundary intercept;  $\mathbf{x}_{IP}$ : Image point;  $\mathbf{x}_{IP2}$ : Second image point;  $\mathbf{x}_{IP2}^*$ : Shifted second image point;  $\mathbf{x}_{QIP\Lambda}$ : quadrant intersection point for stencil size of  $\Lambda$ ;  $\vec{n}$ : local surface unit normal; Dashed red region: stencil size of 2 for  $\mathbf{X}_{i,j}$ ; Dashed green region: stencil size of 2 for  $\mathbf{X}_{i,j+1}$ ; Solid orange line:  $\Gamma$ . For plotting purposes for the ghost-cell  $\mathbf{X}_{i,j}$  the distance  $\|\mathbf{x}_{BI} - \mathbf{x}_{IP2}\|_2 < 3\Delta l_h$ .

| Method | Maximum Stencil Size | Exp. Convergence Order |             |
|--------|----------------------|------------------------|-------------|
|        |                      | Dirichlet IBC          | Neumann IBC |
| $p=2$  |                      |                        |             |
| Q      | 2                    | 2                      | 1           |
| QGS    | 2                    | 2                      | 1           |
| QGSO   | 2                    | 2                      | 1           |
| QIS    | 2                    | 2                      | 1           |
| QISS1  | 1                    | 2                      | 1           |
| $p=3$  |                      |                        |             |
| Q      | 3                    | 3                      | 2           |
| QGS    | 3                    | 3                      | 2           |
| QGSO   | 3                    | 3                      | 2           |
| QIS    | 3                    | 3                      | 2           |
| QISS1  | 2                    | 3                      | 2           |

Table 2: Maximum stencil sizes and expected order of convergence for the proposed quadratic ghost-cell methods with second and third-order Lagrange interpolations ( $p=2$  and 3, respectively) for the image points.

- L: linear method [1] (stencil size of 2),
- LGS: ghost-cell linear square shift method (stencil size of 1),
- LIS: image point linear square shift method (stencil size of 1),
- Q: quadratic ghost point (stencil size of 2),
- QO: quadratic ghost point with different interpolation indices for  $\mathbf{x}_{IP}$  and  $\mathbf{x}_{IP2}$  (stencil size of 2) if  $\mathbf{x}_{IP}$  and  $\mathbf{x}_{IP2}$  are in a stencil size of 1,
- QX: quadratic ghost point with  $X \in \{GS, IS\}$  (stencil size of 2),
- QGSO: quadratic ghost point with different interpolation indices for  $\mathbf{x}_{IP}$  and  $\mathbf{x}_{IP2}$  (stencil size of 2),
- QISS1: quadratic ghost point with image point shift for a maximum stencil size of 1 (stencil size of 1).

For sake of clarity and compactness, the results for a select set of representative methods are presented and discussed with appropriate comments on the results of the remaining methods. The set of representative methods depends on the analytical solution of the Poisson problem and the immersed boundary. It should be noted that BiCGStab linear solver in the *hypre* library [53, 54] is used for all the verification and validation test cases currently considered. The PFMG and BoomerAMG preconditioners are used for methods with a stencil size of 1 and 2, respectively.

As the analytical solution to equation (3) with appropriate boundary conditions and source field can be determined, the  $L^\infty$  and  $L^2$  norms of the error fields are evaluated and follow,

$$L^\infty(\Phi_e) = \max(|\Phi_e|) \quad \forall (i, j) \in C_i, \quad L^2(\Phi_e) = \sqrt{\sum_{i,j} |\Phi_e|^2 V_{i,j}} \quad \forall (i, j) \in C_i, \quad (22)$$

where  $\Phi_e = \hat{\Phi}_{i,j} - \Phi_{i,j}$  is the error field and  $V_{i,j}$  is the inner volume of an inner-cell, i.e. only the part of an inner-cell that is located inside  $\Omega_i$ . As the order of convergence for the  $L^\infty$  and  $L^2$  norms are the same for the numerical simulations for a scalar field only the former norms is used. For the simulations for a vector field both norms are considered.

The numerical simulations have a computational domain of  $\Omega = [-1, 1]^\varsigma$  and  $\Omega = [0, 1]^\varsigma$ , where  $\varsigma$  is the number of spatial dimensions, for numerical simulations with parabolic and trigonometric analytical solutions, respectively. Dirichlet boundary conditions are used for the  $x$ -axis domain boundaries and Neumann boundary conditions are used for the remaining domain boundaries. Figure 9 shows the immersed boundaries  $\Gamma$ s are the canonical circle and sphere with a radius  $r = 0.325L_x$ , where  $L_x$  is the length of the  $x$ -axis domain edge, and the more complex, with convex and concave corners, flower-shaped geometries, denoted as *flower*, that follow

- 2D [19, 43]:  $(0.02\sqrt{5}, 0.02\sqrt{5}) + (0.5 + 0.2\sin(5\theta))\mathbf{e}_r \quad \forall \theta \in [0, 2\pi]$ ,
- 3D:  
 $(x^2 + y^2 + z^2 = r^2) -$   
 $((x \pm r)^2 + y^2 + z^2 = r_f^2) - (x^2 + (y \pm r)^2 + z^2 = r_f^2) - (x^2 + y^2 + (z \pm r)^2 = r_f^2),$

where  $r_f = r/2$  and the centers of the immersed boundaries are at the centers of the computational domains. The Cartesian grid sizes considered are  $(16\nu)^\varsigma$ , where  $\nu = 2^{n-1}$  and  $n$  is the grid number in the grid convergence studies (i.e. first grid:  $n = 1$ , second grid:  $n = 2$ , etc.).

## 5.1 Dirichlet IBCs

Dirichlet IBCs for parabolic and trigonometric analytical solutions are taken into account for the current series of verification and convergence studies. Calculating and keeping the appropriate values of  $R_{i,j}$  in equation (3) to remove all non-IBM truncation errors, denoted as *numerical correction*, is necessary for a complete analysis of the accuracy and convergence of IBMs [43], and will therefore be pursued. For sake of clarity, the results for a select set of representative immersed boundaries for either a parabolic or a trigonometric analytic solution are presented and discussed in this section.

### 5.1.1 Parabolic Solution

One of the analytical solutions to the 3D Poisson problem follows

$$\phi(\mathbf{x}) = (1 + x)^2, \quad f(\mathbf{x}) = 2, \quad \forall(\mathbf{x}) \in \Omega_i \in \mathbb{R}^3, \quad (23)$$

given that

$$\begin{aligned} \phi(\mathbf{x}) &= (1 + x)^2 & \forall(\mathbf{x}) \in \Gamma, \\ \phi(-1, y, z) &= 0, \quad \phi(1, y, z) = 4 & \forall(y, z) \in [-1, 1], \\ \frac{\partial \phi}{\partial n}(x, -1, z) &= 0, \quad \frac{\partial \phi}{\partial n}(x, 1, z) = 0 & \forall(x, z) \in [-1, 1], \\ \frac{\partial \phi}{\partial n}(x, y, -1) &= 0, \quad \frac{\partial \phi}{\partial n}(x, y, 1) = 0 & \forall(x, y) \in [-1, 1], \end{aligned} \quad (24)$$

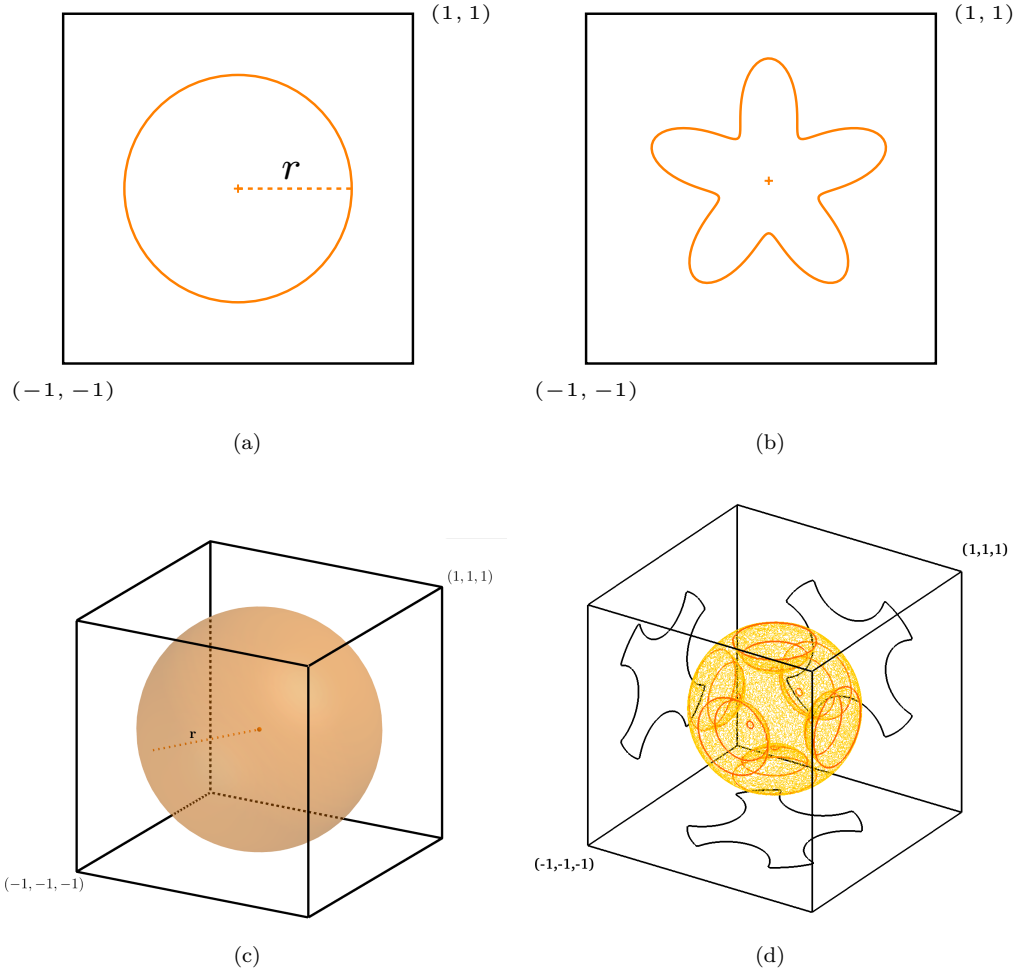


Figure 9: Computational domain for (a) circle, (b) 2D flower, (c) sphere, and (d) 3D flower immersed boundaries  $\Gamma$ s for (a,b) 2D and (c,d) 3D verification test problems with a parabolic analytical solution. Solid orange line/surface:  $\Gamma$ ;  $r$ : radius.

where numerical corrections are applied to the  $x$ -axis domain boundary conditions [43]. The analytical solution for the corresponding 2D Poisson problem follows equation (23) with the appropriate 2D source term (e.g.  $f(x, y) = 2$ ) and boundary conditions.

### 5.1.2 Trigonometric Solution

A second analytical solution to the Poisson problem is

$$\begin{aligned}\phi(\mathbf{x}) &= \sin(\pi x)\cos(2\pi y), \quad f(\mathbf{x}) = -5\pi^2\sin(\pi x)\cos(2\pi y) & \forall(\mathbf{x}) &\in \Omega_i \in \mathbb{R}^2, \\ \phi(\mathbf{x}) &= \sin(\pi x)\cos(2\pi y)\cos(2\pi z), \quad f(\mathbf{x}) = -9\pi^2\sin(\pi x)\cos(2\pi y)\cos(2\pi z) & \forall(\mathbf{x}) &\in \Omega_i \in \mathbb{R}^3,\end{aligned}\tag{25}$$

given that

$$\begin{aligned}\phi(\mathbf{x}) &= \sin(\pi x)\cos(2\pi y) & \forall(\mathbf{x}) &\in \Gamma \in \mathbb{R}^2, \\ \phi(0, y) &= 0, \quad \phi(1, y) = 0 & \forall(y) &\in [0, 1], \\ \frac{\partial\phi}{\partial n}(x, 0) &= 0, \quad \frac{\partial\phi}{\partial n}(x, 1) = 0 & \forall(x) &\in [0, 1], \\ \phi(\mathbf{x}) &= \sin(\pi x)\cos(2\pi y)\cos(2\pi z) & \forall(\mathbf{x}) &\in \Gamma \in \mathbb{R}^3, \\ \phi(0, y, z) &= 0, \quad \phi(1, y, z) = 0 & \forall(y, z) &\in [0, 1], \\ \frac{\partial\phi}{\partial n}(x, 0, z) &= 0, \quad \frac{\partial\phi}{\partial n}(x, 1, z) = 0 & \forall(x, z) &\in [0, 1], \\ \frac{\partial\phi}{\partial n}(x, y, 0) &= 0, \quad \frac{\partial\phi}{\partial n}(x, y, 1) = 0 & \forall(x, y) &\in [0, 1],\end{aligned}\tag{26}$$

where numerical corrections are not needed for any of the domain boundary conditions.

### 5.1.3 Reduce Stencil Size to 1

Figure 10 shows the  $L^\infty$  norms of  $\Phi_e$  for various immersed boundaries for the Poisson problem with parabolic and trigonometric analytical solutions for the LGS and LIS methods and, as expected, they have a second-order limiting behavior. As seen from Figure 10(a), the LGS and LIS methods are more accurate than the L method, yield a more consistent second-order limiting behavior (especially for  $L^\infty$ ), and may be used interchangeably (i.e. negligible differences in the accuracy of the results). This similarity is attributed to the similar impact of the interpolation truncation errors of the ghost point in the LGS method and Dirichlet IBCs for the LIS method. For the LIS method  $\mathbf{X}_{i,j} = \mathbf{x}_{GP}$  and, therefore, uses one Lagrange interpolation less than the LGS method, but as  $\Delta l_1'' + \Delta l_2'' > \Delta l'$  the interpolation error associated with the Dirichlet IBCs is larger for the LIS method than the LGS method.

As seen from Figure 10(b), for the sphere immersed boundaries the improvements in accuracy in the  $L^\infty$  norms previously seen are increased and reduced, respectively. This behavior is not unique to the sphere immersed boundaries and is characteristic to all comparisons between 2D and 3D verification cases as it is also observed in the comparison of the error norms between the 2D and 3D flower immersed boundaries for a parabolic analytical solution (not shown). As such the LGS and

LIS methods yield results with significantly smaller maximum errors and have a maximum stencil size of 1.

Figure 10(c) shows that for a 3D flower immersed boundary with a trigonometric analytical solution the LGS and LIS methods only slightly improve the accuracy of the  $L^\infty$  norm, and yield a  $L^\infty$  norm with a more consistent second-order limiting behavior. This behavior is not unique to the 3D flower immersed boundary and is present for all comparisons between parabolic and trigonometric analytical solutions. It should be noted that despite the limited accuracy improvements of the LGS and LIS methods for the 3D flower immersed boundary for a trigonometric analytical solution, these methods have a maximum stencil size of 1.

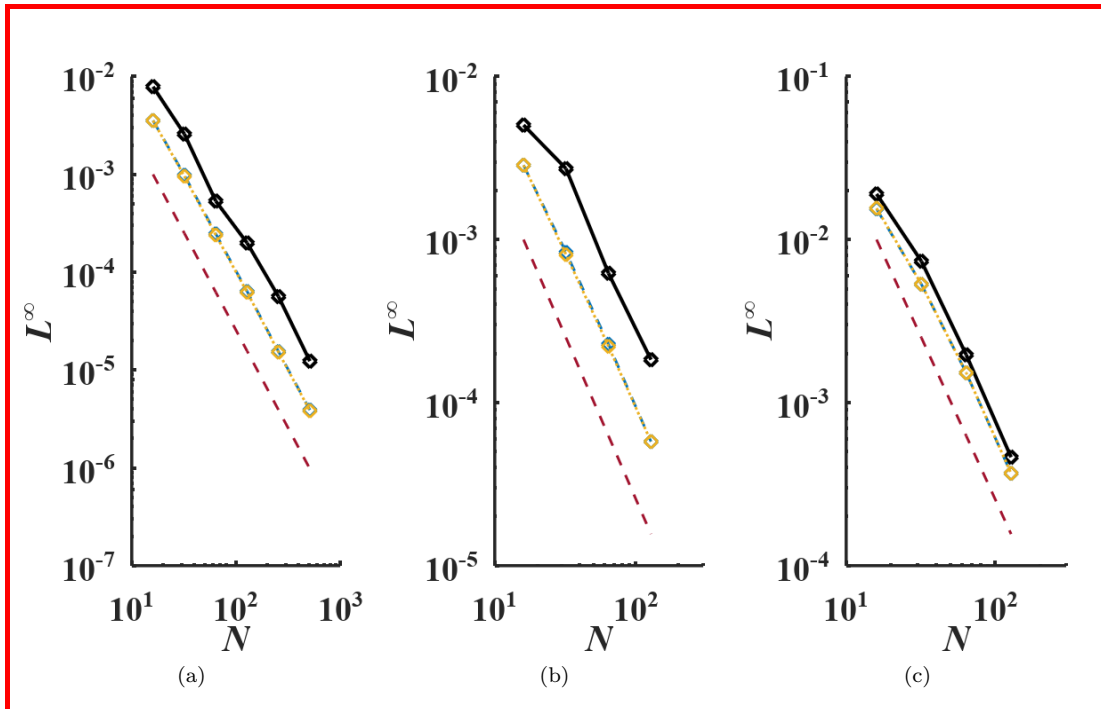


Figure 10:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a) 2D flower, (b) sphere, and (c) 3D flower immersed boundary with Dirichlet IBC for a (a,b) parabolic and (c) trigonometric analytical solution. Black solid line: L; Blue dashed line: LGS; Orange dotted line: LIS; Red dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis.

*Conclusion:* Although for Dirichlet IBCs the LGS and LIS methods result in, at best, significantly smaller error norms, and, at worst, negligible improvements these methods tend to yield error norms with a more consistent second-order limiting behavior, compared to the L method, and have a maximum stencil size of 1, whereas the L method has a maximum stencil size of 2.

#### 5.1.4 Improved Accuracy with the Quadratic Method

In this section the improvements to the accuracy of the numerical solutions obtained with the proposed square shifting methods for various immersed boundaries for Poisson problems with parabolic

and trigonometric analytical solutions are presented.

**QX Methods** Figure 11 shows the  $L^\infty$  norms of  $\Phi_e$  for various immersed boundaries for a Poisson problem with parabolic and trigonometric analytical solutions for the Q, QGS, and QIS methods (denoted as the QX methods) and, as expected, have a second-order limiting behavior. As seen from Figure 11(a), for the same stencil size of 2 the QX methods are more accurate than the L method, and similar to the errors norms for the LGS and LIS methods, the QGS and QIS methods yield more consistent second-order limiting behaviors (especially for  $L^\infty$ ) and may be used interchangeably. As seen by comparing the QX methods in Figures 11(a) and 11(b), the Q method is least adept at smoothing out the less consistent second-order convergence of the L method, yields the largest errors norms, and cannot be used interchangeably with the QGS or QIS methods.

The trends observed in Figures 11(a) and 11(b) are also observed for all immersed boundaries and for the parabolic and trigonometric analytical solutions except for the 3D flower immersed boundary for a parabolic analytical solution, shown in Figure 11(c). For this verification case the QX methods, which have the same stencil size of 2 as the L method, are more accurate than the L method, yield a slightly more consistent second-order behavior, and may be used interchangeably.

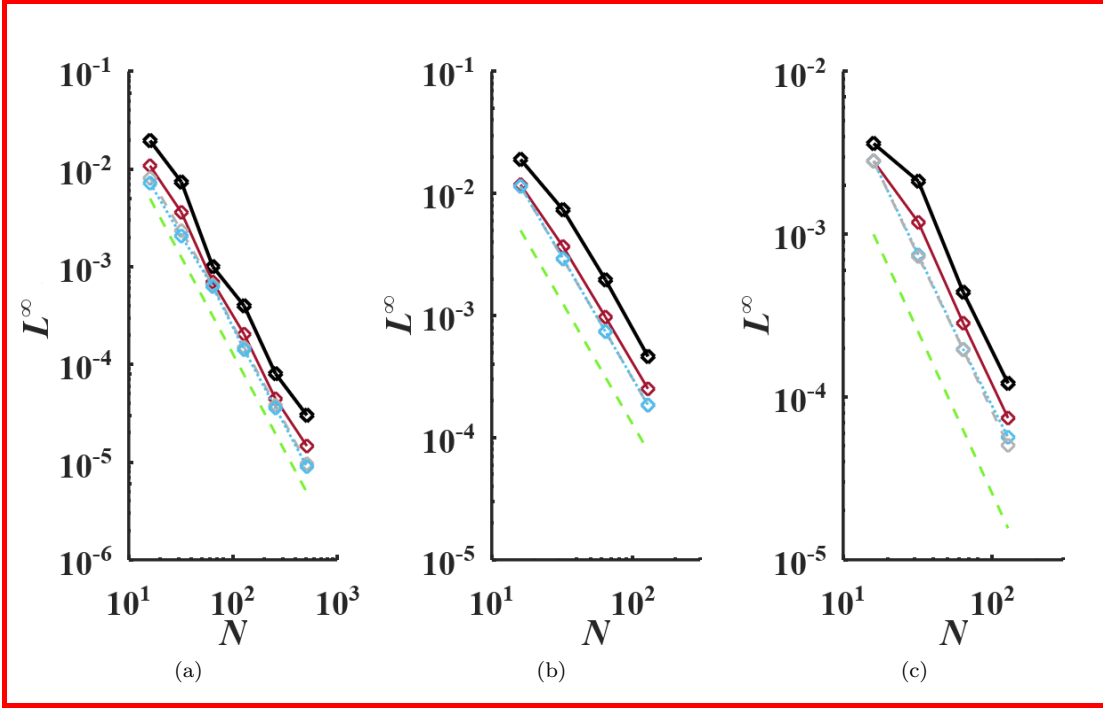


Figure 11:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a) circle, (b) sphere, and (c) 3D flower immersed boundary with Dirichlet IBC for a (a,b) trigonometric and (c) parabolic analytical solution. Black solid line: L; Red solid line: Q; Blue dotted line: QGS; Grey dashed line: QIS; Green dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis. Blue dotted line and grey dashed line are superimposed on each other in (b) and (c).

**Different Image Points Interpolation Sets** Figure 12(a) shows the  $L^\infty$  norms of  $\Phi_e$  for a circle immersed boundary for a Poisson problem with a parabolic analytical solution for QX and QGSO methods, where the image points have different sets of interpolation indices. As seen by comparing the Q and QO methods, and the QGS and QGSO methods, the QGSO methods do not results in a more accurate solution and as they may be used interchangeably with the QX methods all comparison in Section 5.1.4 are applicable to the QGSO methods.

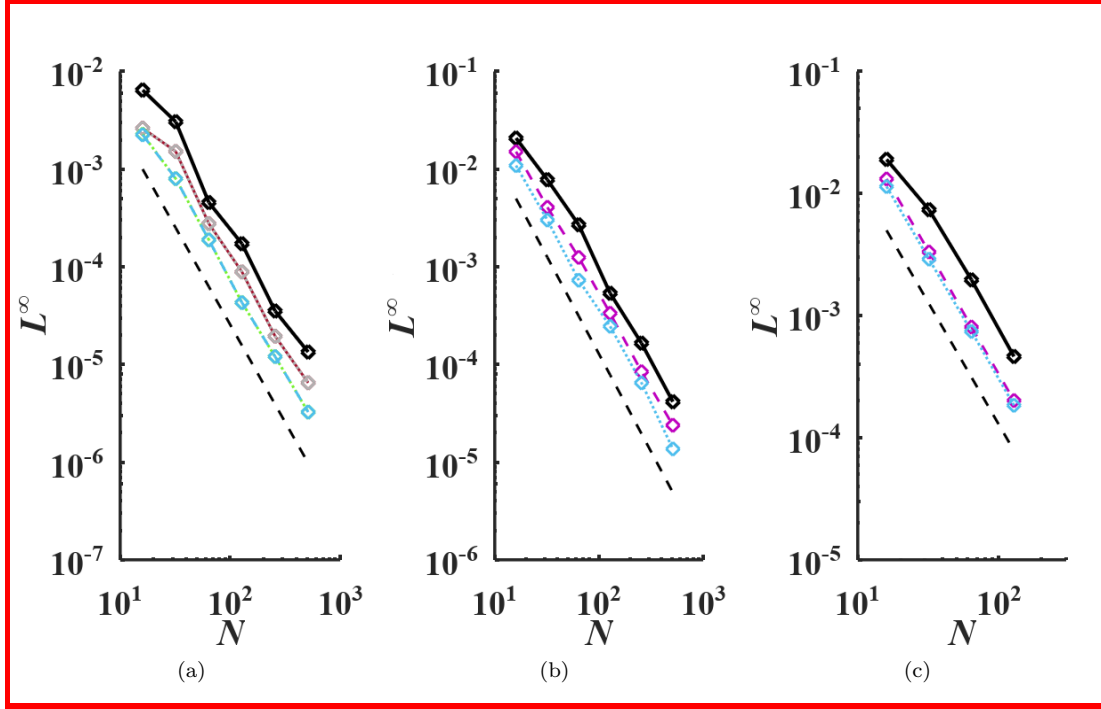


Figure 12:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a) circle, (b) 2D flower, and (c) sphere immersed boundary with Dirichlet IBC for a (a) parabolic and (b,c) trigonometric analytical solution. Black solid line: L; Red solid line: Q; Grey dotted line: QO; Blue dashed line: QGS; Green dotted line: QGSO; Blue dotted line: QIS; Purple dashed line: QISS1; Black dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis.

**Quadratic Method with Stencil Size of 1** Figures 12(b) and 12(c) show the  $L^\infty$  norms of  $\Phi_e$  for 2D flower and sphere immersed boundaries, respectively, for a Poisson problem with trigonometric analytical solution for the QIS and QISS1 methods. Although the QISS1 method with a maximum stencil size of 1 is more accurate and yields a more consistent second-order limiting behavior compared to the L method, it is marginally less accurate than the QIS method with a maximum stencil size of 2. It should be noted that the QISS1 method is a viable alternative to the QIS method as the slightly smaller error norms of the latter, compared to the former, is accompanied by a doubling of the stencil size.

### 5.1.5 Third-Order Lagrange Interpolation

As third-order Lagrange ( $p=3$ ) interpolations extend the stencil size of second-order Lagrange interpolations from 1 to 2 their use with IBMs with a stencil size of 2 is strongly discouraged, i.e. they extend the stencil size from 2 to 3. To prevent these additional performance penalties related to the stencil size of 3,  $p=3$  interpolations should only be pursued with IBMs that have a maximum stencil size of 1, such as the linear square shift method and QISS1. Although the use of  $p=3$  with these IBMs extends their maximum stencil size to 2 (the same as the L method) their increased accuracy still characterizes them as improvements of the L method.

Figure 13 shows the  $L^\infty$  norms of  $\Phi_e$  for a circle and sphere immersed boundary for a Poisson problem with a parabolic and trigonometric analytical solution for the LGS method with  $p=2$  and  $p=3$ . As expected, the LGS method with third-order Lagrange interpolations also results in second-order convergence, as the truncation error on the order of  $\max(O(\Delta t_h^2), O(\Delta h^3))$ , for both errors norms and yields more accurate results than the LGS method with  $p=2$ .

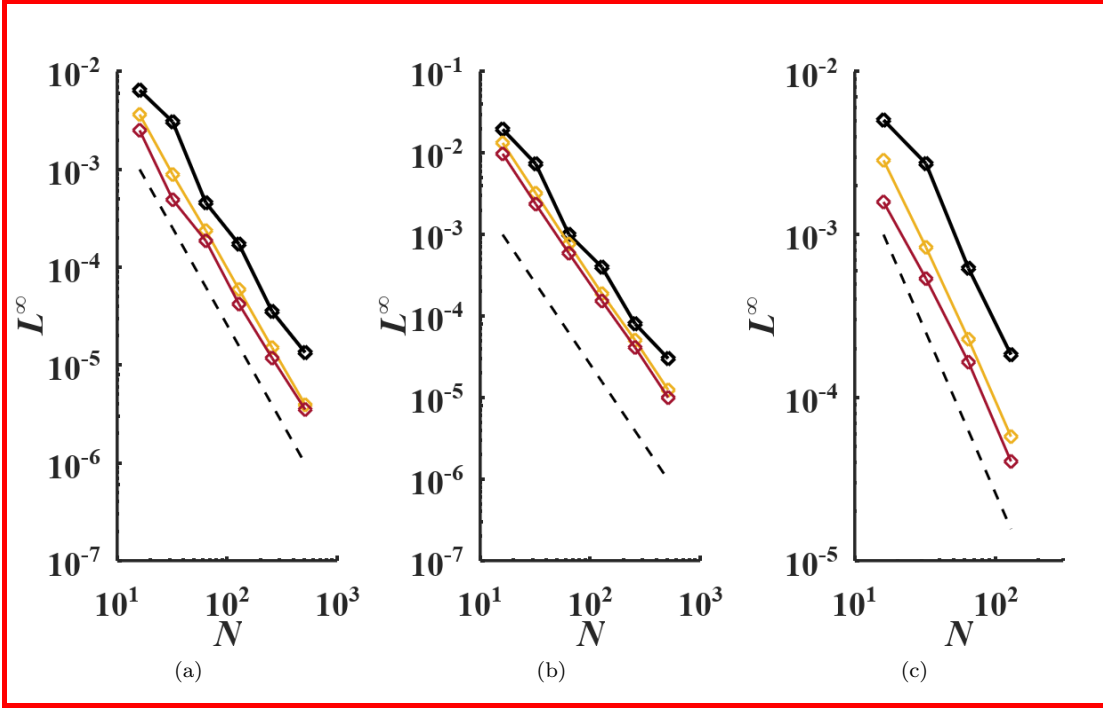


Figure 13:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a,b) circle and (c) sphere immersed boundary with Dirichlet IBC for (a,c) parabolic and (b) trigonometric analytical solution. Black solid line: L; Orange solid line: LGS with  $p=2$ ; Red solid line: LGS with  $p=3$ ; Black dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis.

Although the  $L^\infty$  norms have a second-order convergence, the numerical error field for the parabolic analytical solution, shown in Figure 12, is not on the order of machine epsilon due to the linear interpolation used at the domain boundary conditions and the second-order Lagrange interpolations ( $p=2$ ) used for the ghost and image points. However, for the Poisson problem with

the parabolic analytical solution, the combined use of the QISS1 method, third-order Lagrange interpolations ( $p=3$ ), and extending the quadratic method with second-order Lagrange interpolations ( $p=2$ ) to the domain boundaries yields error fields with values on the order of machine epsilon. By also considering the Poisson problem with the trigonometric analytical solution, shown in Figure 14, it can be concluded the QISS1 method and  $p=3$  for equation (20) not only significantly increase the accuracy regardless of the Poisson analytical solution, but also improves the order of convergence of the IBM to third-order (appropriate numerical corrections are used to isolate the IBM truncation errors). This behavior is expected as equation (20) now has a truncation error on the order of  $\max(O(\Delta l_h^3), O(\Delta h^3))$ .

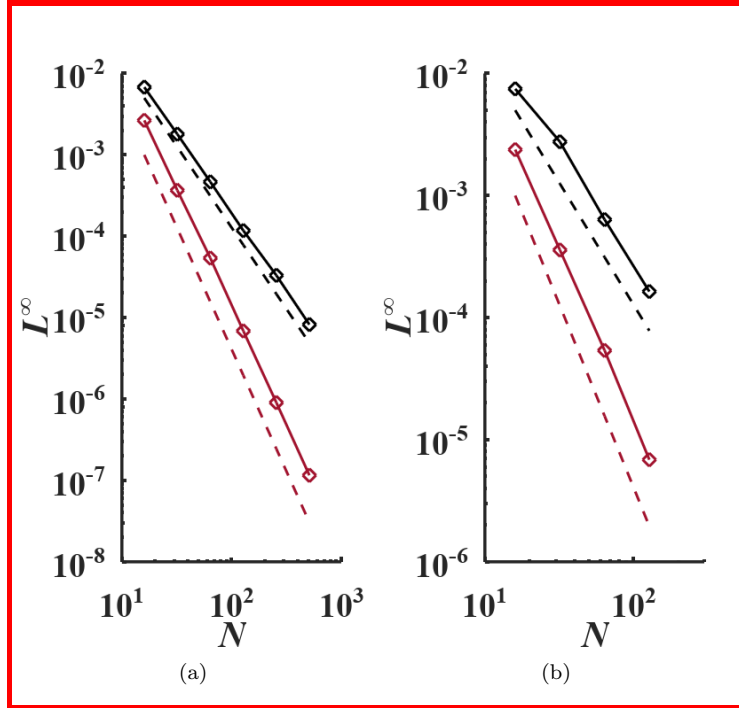


Figure 14:  $L^\infty$  norms of  $\Phi_e$  for a (a) circle and a (b) sphere immersed boundary with Dirichlet IBC and trigonometric analytical solution. Black line:  $p=2$  ; Red line:  $p=3$ ; Black dashed line: second order convergence; Red dashed line: third order convergence;  $N$ : number of cells in the  $x$ -axis.

**Conclusion** For Dirichlet IBCs and a maximum stencil size of 1, the proposed shifted linear methods (LGS and LIS) result in a numerical solution with the smallest  $L^\infty$  norms for all immersed boundaries and analytical solutions currently considered, except for sphere immersed boundary with trigonometric analytical solution wherein the QISS1 method is slightly more accurate. These methods are also more accurate than the standard linear method and, as they have a smaller stencil size, yield more computationally efficient band matrices.

For Dirichlet IBCs and a maximum stencil size of 2, the proposed quadratic shifted methods (QGS and QIS) result in a numerical solution with the smallest  $L^\infty$  norms for all current verification

cases. Given that the standard linear and QX methods have the same maximum stencil size of 2, the latter methods increase the accuracy of the solution without any significant performance penalties. It should be noted that methods that use different interpolation sets (QGSO) have negligible differences with the QX methods. As expected the QGS and QIS methods are more accurate than the LGS and LIS methods for all verification cases currently considered. By increasing the maximum stencil size of the QISS1 method from 1 to 2, through the use of third-order Lagrange interpolations ( $p=3$ ), a more accurate numerical solution with an improved order of convergence of the  $L^\infty$  norms of three is obtained with the same stencil size as the standard linear method.

Table 3 summarizes the maximum stencil sizes and order of convergences of the various proposed methods for Dirichlet IBCs for parabolic and trigonometric analytical solutions for the 2D and 3D Poisson problems.

| Method           | Maximum Stencil Size | Measured Order of Convergence |
|------------------|----------------------|-------------------------------|
| One Image Point  |                      |                               |
| L ( $p=2$ )      | 2                    | 2                             |
| LGS ( $p=2$ )    | 1                    | 2                             |
| LGS ( $p=3$ )    | 2                    | 2                             |
| LIS ( $p=2$ )    | 1                    | 2                             |
| Two Image Points |                      |                               |
| Q ( $p=2$ )      | 2                    | 2                             |
| QGS ( $p=2$ )    | 2                    | 2                             |
| QGSO ( $p=2$ )   | 2                    | 2                             |
| QIS ( $p=2$ )    | 2                    | 2                             |
| QISS1 ( $p=2$ )  | 1                    | 2                             |
| QISS1 ( $p=3$ )  | 2                    | 3                             |

Table 3: Maximum stencil sizes and order of convergences for the proposed methods for Dirichlet IBCs.

## 5.2 Neumann IBCs

Neumann IBCs for parabolic and trigonometric analytical solutions are also taken into account for the current series of verification and convergence studies. Similar to Dirichlet IBCs, numerical correction is taken into account to emphasise the accuracy of the IBMs currently considered.

### 5.2.1 Parabolic Solution

The analytical solution of the current 3D Poisson problem follows

$$\phi(\mathbf{x}) = (1 + x)^2, \quad f(\mathbf{x}) = 2, \quad \forall(\mathbf{x}) \in \Omega_i, \quad (27)$$

given that

$$\begin{aligned}
\frac{\partial \phi}{\partial n}(\mathbf{x}) &= \frac{2x(1+x)}{\sqrt{x^2+y^2+z^2}} \quad \forall(\mathbf{x}) \in \Gamma, \\
\phi(-1, y, z) &= 0, \quad \phi(1, y, z) = 4 \quad \forall(y, z) \in [-1, 1], \\
\frac{\partial \phi}{\partial n}(x, -1, z) &= 0, \quad \frac{\partial \phi}{\partial n}(x, 1, z) = 0 \quad \forall(x, z) \in [-1, 1], \\
\frac{\partial \phi}{\partial n}(x, y, -1) &= 0, \quad \frac{\partial \phi}{\partial n}(x, y, 1) = 0 \quad \forall(x, y) \in [-1, 1],
\end{aligned} \tag{28}$$

where numerical corrections only need to be applied to the  $x$ -axis domain boundary conditions [43]. The analytical solution for the corresponding 2D Poisson problem follows equation (28) with the appropriate 2D source term and boundary conditions (e.g.  $\partial \phi(\mathbf{x})/\partial n = 2x(1+x)/\sqrt{x^2+y^2}$ ).

### 5.2.2 Trigonometric Solution

A second analytical solution to the Poisson problem is

$$\begin{aligned}
\phi(\mathbf{x}) &= \sin(\pi x)\cos(2\pi y), \quad f(\mathbf{x}) = -5\pi^2 \sin(\pi x)\cos(2\pi y) \quad \forall(\mathbf{x}) \in \Omega_i \in \mathbb{R}^2, \\
\phi(\mathbf{x}) &= \sin(\pi x)\cos(2\pi y)\cos(2\pi z), \quad f(\mathbf{x}) = -9\pi^2 \sin(\pi x)\cos(2\pi y)\cos(2\pi z) \quad \forall(\mathbf{x}) \in \Omega_i \in \mathbb{R}^3,
\end{aligned} \tag{29}$$

given that

$$\begin{aligned}
\frac{\partial \phi}{\partial n}(\mathbf{x}) &= \pi \cos(\pi x)\cos(2\pi y)n_x - \\
&\quad 2\pi \sin(\pi x)\sin(2\pi y)n_y \quad \forall(\mathbf{x}) \in \Gamma \in \mathbb{R}^2, \\
\phi(0, y) &= 0, \quad \phi(1, y) = 0 \quad \forall(y) \in [0, 1], \\
\frac{\partial \phi}{\partial n}(x, 0) &= 0, \quad \frac{\partial \phi}{\partial n}(x, 1) = 0 \quad \forall(x) \in [0, 1], \\
\frac{\partial \phi}{\partial n}(\mathbf{x}) &= \pi \cos(\pi x)\cos(2\pi y)\cos(2\pi z)n_x - \\
&\quad 2\pi \sin(\pi x)\sin(2\pi y)\cos(2\pi z)n_y - \\
&\quad 2\pi \sin(\pi x)\cos(2\pi y)\sin(2\pi z)n_z \quad \forall(\mathbf{x}) \in \Gamma \in \mathbb{R}^3, \\
\phi(0, y, z) &= 0, \quad \phi(1, y, z) = 0 \quad \forall(y, z) \in [0, 1], \\
\frac{\partial \phi}{\partial n}(x, 0, z) &= 0, \quad \frac{\partial \phi}{\partial n}(x, 1, z) = 0 \quad \forall(x, z) \in [0, 1], \\
\frac{\partial \phi}{\partial n}(x, y, 0) &= 0, \quad \frac{\partial \phi}{\partial n}(x, y, 1) = 0 \quad \forall(x, y) \in [0, 1],
\end{aligned} \tag{30}$$

where  $n_x$ ,  $n_y$ , and  $n_z$  are the local surface unit normals in the  $x$ ,  $y$ , and  $z$ -direction, respectively, and numerical corrections are not needed for any of the domain boundary conditions.

For an appropriate comparison with the results obtained with the first-order LIS method for Neumann IBCs, second-order Lagrange interpolations ( $p=2$ ) for the ghost and image points are

considered. As seen from equation (7), for Neumann IBCs a first-order limiting behavior is expected for second-order Lagrange interpolations.

### 5.2.3 Reduce Stencil Size to 1

Figure 15 shows the  $L^\infty$  norms of  $\Phi_e$  for a circle and sphere immersed boundary for a Poisson problem with the parabolic analytical solution for the LGS and LIS methods, and, as expected, have a first-order limiting behavior. Similar to the results for Dirichlet IBCs, the LGS and LIS methods may be used interchangeably (i.e. negligible differences in the accuracy of the results). The LGS and LIS methods also yield the same  $L^\infty$  norms compared to the L method. It should be noted that although the increase in accuracy obtained with the linear square shift methods for the parabolic analytical solution with Neumann IBCs is smaller than those obtained with their Dirichlet IBCs counterpart, the maximum stencil size of 1 of these methods is preferred over the maximum stencil size of 2 of the L method.

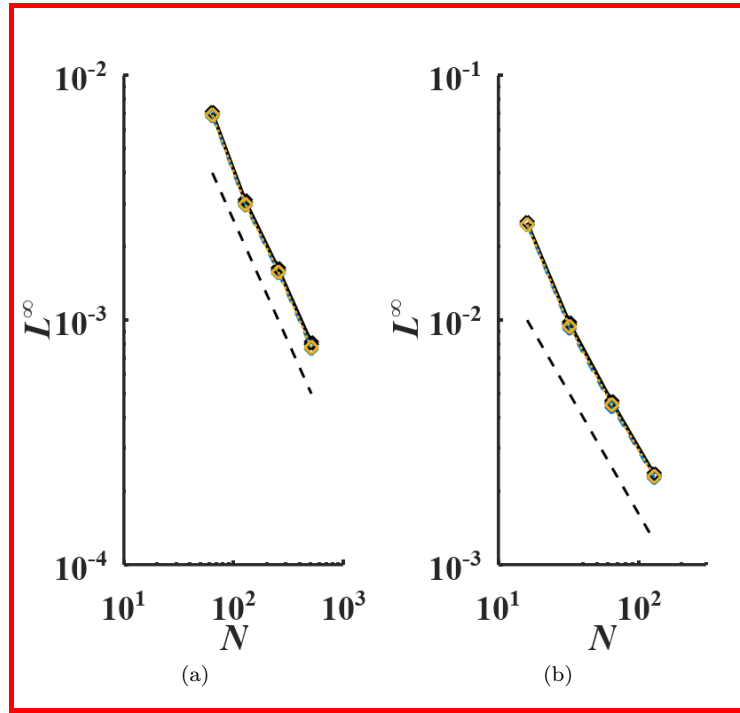


Figure 15:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a) circle and a (b) sphere immersed boundary with Neumann IBC. Black solid line: L; Blue dashed line: LGS; Orange dotted line: LIS; Black dashed line: first order convergence;  $N$ : number of cells in the  $x$ -axis.

Figure 16 shows that for a circle and a sphere immersed boundary for a Poisson problem with a trigonometric analytical solution the  $L^\infty$  norms of  $\Phi_e$  for the LGS and LIS methods have between first and second-order limiting behavior. Unlike the behavior for a parabolic analytical solution with Neumann IBCs, for a trigonometric analytical solution the LGS and LIS methods are more accurate than the L method, increase the order of convergence from 1 to approximately 1.5 for

a circle immersed boundary, and yield a more consistent first-order limiting behavior for a sphere immersed boundary (especially the LGS method). Although the LGS and LIS methods may only be used interchangeably for a circle immersed boundary, the differences in the errors norms between the two methods for a sphere immersed boundary are limited. The superconvergence seen in Figure 16(a) is not yet explained and it is therefore more prudent to retain an overall order of convergence of 1, as seen in the other test cases and in accordance with the truncation errors in equations (12) and (16).

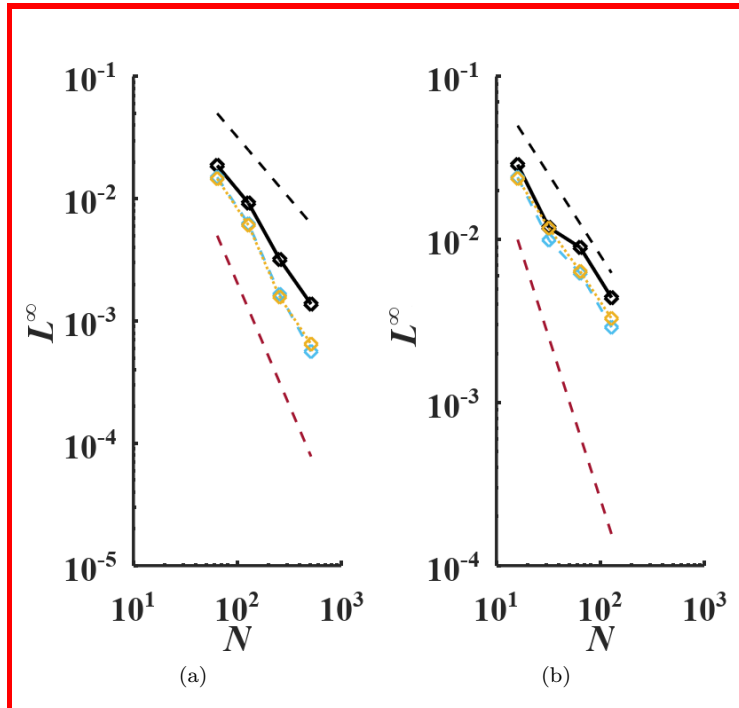


Figure 16:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a) circle and a (b) sphere immersed boundary with Neumann IBC and trigonometric analytical solution. Black solid line: L; Blue dashed line: LGS; Orange dotted line: LIS; Black dashed line: first-order convergence; Red dashed line: second order convergence;  $N$ : number of cells in the  $x$ -axis.

#### 5.2.4 Improved Accuracy with the Quadratic Method

In this section the improvements to the accuracy of the numerical solutions obtained with the proposed square shifting methods for various immersed boundaries for Poisson problems with parabolic and trigonometric analytical solutions are presented.

**QX Methods** Similar to the linear square shift methods for Neumann IBCs, the QX methods yield the same  $L^\infty$  norm as the L method. As a result, the  $L^\infty$  norms of  $\Phi_e$  for the circle and sphere immersed boundaries for a Poisson problem with the parabolic analytical solution for the

QX methods with Neumann IBCs have a first-order limiting behavior. The limited improvement in the accuracy of the results despite using the quadratic method is attributed to the large first-order truncation error of the second-order Lagrange interpolations for Neumann IBCs which masks any accuracy gains associated with the quadratic method. It should be noted that as the grid size increases the QGS method yields slightly more accurate results than the QIS method (and by extension the Q method).

Figure 17 shows the  $L^\infty$  norms of  $\Phi_e$  for a circle and a sphere immersed boundary for a Poisson problem with a trigonometric analytical solution for the Q, QGS, and QIS methods and have a first-order limiting behavior, except for the QGS method which increases the order of convergence from 1 to 1.6. Unlike the behavior observed for a parabolic analytical solution with Neumann IBCs, for a trigonometric analytical solution the QX methods may not be used interchangeably as the QGS method is more accurate than the Q and QIS methods. The superconvergence of the QGS method seen in Figure 17 is not yet explained.

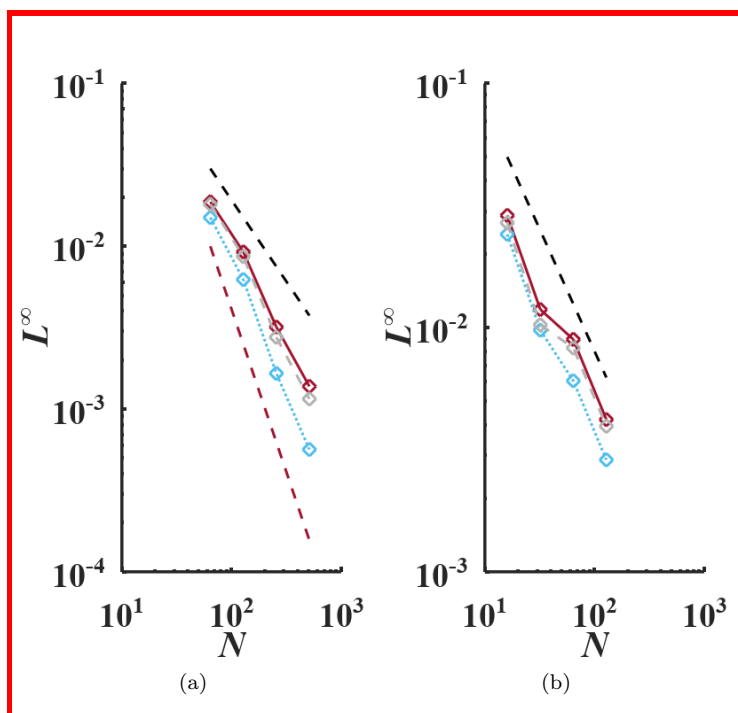


Figure 17:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a) circle and a (b) sphere immersed boundary with Neumann IBC and trigonometric analytical solution. Black solid line: L; Red solid line: Q; Blue dotted line: QGS; Grey dashed line: QIS; Black dashed line: first-order convergence; Red dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis. The black and red solid line are superimposed on each other in (a) and (b).

Similar to the results for Dirichlet IBCs, for Neumann IBCs with a parabolic and trigonometric analytical solution the QGS methods do not yield more accurate solutions and as they may be used interchangeably with the QX methods all comments on the latter methods are applicable to

the former methods.

**Quadratic Method with Stencil Size of 1** For Neumann IBCs with a parabolic analytical solution the QISS1 method do not results in a more accurate solution and may be used interchangeably with the QX and QGSO methods.

### 5.2.5 Third-Order Lagrange Interpolation

As seen in Section 5.1.5, the use of third-order Lagrange ( $p=3$ ) interpolations for IBMs with a maximum stencil size of 1 only increases the accuracy of results for Dirichlet IBCs as the leading term in the truncation error is related to second-order IBCs. However, as seen from equations (10), for Neumann IBCs the leading term in the truncation errors for the IBMs with a maximum stencil size of 1 is related to the order of interpolation used for the image points.

Figure 18 shows the  $L^\infty$  norms of  $\Phi_e$  for a circle and sphere immersed boundary for a Poisson problem with a parabolic and trigonometric analytical solution for the LGS method with  $p=2$  and  $p=3$ . As expected, the LGS method with third-order Lagrange interpolations with its maximum stencil size of 2 has a second-order convergence for both error norms and also yields significantly more accurate results than the LGS method with  $p=2$ .

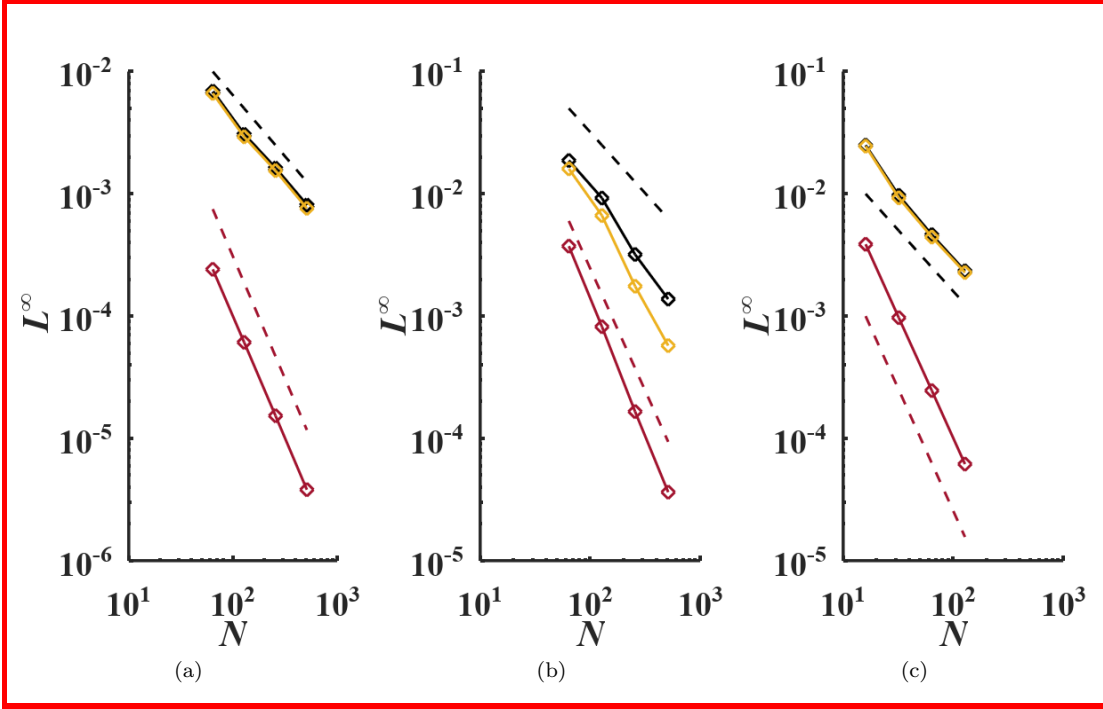


Figure 18:  $L^\infty$  norms of  $\Phi_e$  for various IBMs for a (a,b) circle and (c) sphere immersed boundary with Neumann IBC for (a,c) parabolic and (b) trigonometric analytical solution. Black solid line: L; Orange solid line: LGS with  $p=2$ ; Red solid line: LGS with  $p=3$ ; Black dashed line: first order convergence; Red dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis.

Similar to the Dirichlet IBCs, the combined use of QISS1,  $p=3$  for equation (20), and extending the quadratic method with second-order Lagrange interpolations to the domain boundaries yields error fields with maximum values on the order of machine epsilon for the parabolic analytical solution.

Figure 19 shows the  $L^\infty$  norms of  $\Phi_e$  for a circle and a sphere immersed boundary for a Poisson problem with a trigonometric analytical solution for the QIS and QISS1 methods. The QISS1 method with second-order Lagrange interpolations ( $p=2$ ) is more accurate than the QIS method and increases the order of convergence from 1 to 1.6. It should be noted that a more accurate solution with the QISS1 is expected as the distances between the ghost-cell and image points decreases, thereby decreasing the error associated with the interpolations and discretizations. As seen from equation (20) and shown in Figure 19, by extending the maximum stencil size of QISS1 from 1 to 2, through the use of  $p=3$ , the order of convergence of the error norms also increase from 1.6 to 2 for a trigonometric analytical solution.

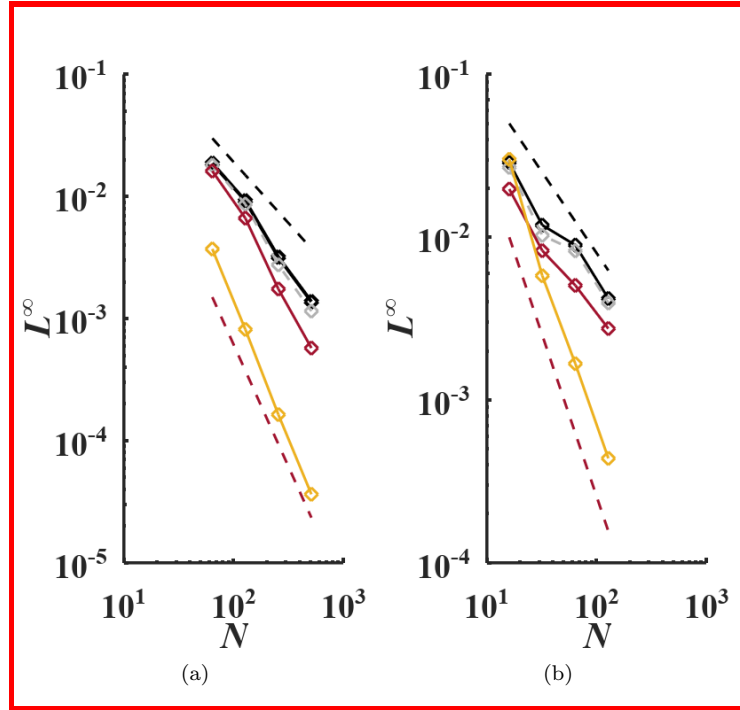


Figure 19:  $L^\infty$  norms of  $\Phi_e$  for a (a) circle and a (b) sphere immersed boundary with Neumann IBC and trigonometric analytical solution. Black line:  $L$ ; Grey dotted line: QIS; Red line: QISS1  $p=2$ ; Orange line: QISS1  $p=3$ ; Black dashed line: first-order convergence; Red dashed line: second-order convergence;  $N$ : number of cells in the  $x$ -axis.

**Conclusion** For Neumann IBCs and maximum stencil sizes of 1 and 2, the improvements in the  $L^\infty$  norms of the error field  $\Phi_e$  obtained with the proposed shifted and quadratic methods varies with the analytical solution of the Poisson test problem.

For a maximum stencil size of 1 and a parabolic analytical solution, the proposed shifted methods (LGS, LIS, and QISS1) result in little to no improvements in the  $L^\infty$  norms compared to the L method. However, for a trigonometric analytical solution the proposed shifted methods yield smaller  $L^\infty$  norms and increase the order of convergence compared to the standard linear method. Regardless of the similarity in numerical accuracy obtained for a parabolic analytical solution, these square shift methods have a maximum stencil size of 1 and thereby yield computational efficient band matrices.

For a maximum stencil size of 2 and a parabolic analytical, the proposed quadratic methods (QX and QGSO) also result in little to no improvements in the  $L^\infty$  norms compared to the standard linear method and may be used interchangeably. However, for a trigonometric analytical solution the proposed quadratic methods result in smaller error norms and an increase in the order of convergence compared to the standard linear method. As expected, the proposed QISS1 method and third-order Lagrange interpolations result in significant decreases in the values of the  $L^\infty$  norms and leads to second-order convergence.

Table 4 summarizes the maximum stencil sizes and order of convergences of the various proposed methods for Neumann IBCs for parabolic and trigonometric analytical solutions for the 2D and 3D Poisson problems.

| Method           | Maximum Stencil Size | Measured Order of Convergence |
|------------------|----------------------|-------------------------------|
| One Image Point  |                      |                               |
| L ( $p=2$ )      | 2                    | 1                             |
| LGS ( $p=2$ )    | 1                    | 1(1.5)                        |
| LGS ( $p=3$ )    | 2                    | 2                             |
| LIS ( $p=2$ )    | 1                    | 1(1.5)                        |
| Two Image Points |                      |                               |
| Q ( $p=2$ )      | 2                    | 1                             |
| QGS ( $p=2$ )    | 2                    | 1(1.5)                        |
| QGSO ( $p=2$ )   | 2                    | 1                             |
| QIS ( $p=2$ )    | 2                    | 1                             |
| QISS1 ( $p=2$ )  | 1                    | 1                             |
| QISS1 ( $p=3$ )  | 2                    | 2                             |

Table 4: Maximum stencil sizes and order of convergences for the proposed methods for Neumann IBCs. The order of convergence shown in parenthesis corresponds to a superconvergence encountered for a specific test case.

## 6 Numerical Simulations for a Vector Flow Field

In this section the results of numerical simulations for the 3D incompressible Navier-Stokes equations with constant density and viscosity for various verification and validation test cases are presented. The governing equations follow

$$\begin{aligned}
\frac{\partial \mathbf{u}}{\partial t} + \nabla \cdot (\mathbf{u} \otimes \mathbf{u}) &= -\nabla p + \nu \Delta \mathbf{u} + \mathbf{f}, & \text{in } \Omega_i, \\
\nabla \cdot \mathbf{u} &= 0, & \text{in } \Omega_i, \\
\mathbf{u} &= \mathbf{u}_D, & \text{on } \partial\Omega_D \cup \Gamma_D, \\
\nabla \mathbf{u} \cdot \mathbf{n} &= \mathbf{u}_N, & \text{on } \partial\Omega_N \cup \Gamma_N,
\end{aligned} \tag{31}$$

where  $\Omega_i \subset \mathbb{R}^3$ ,  $\mathbf{u}=(u, v, w)$  is the velocity flow field,  $p$  is the kinematic pressure,  $\mathbf{f}$  is a source flow field,  $\nu$  is the kinematic viscosity,  $\mathbf{u}_D$  is the Dirichlet domain boundary conditions, and  $\mathbf{u}_N$  is the Neumann domain boundary conditions. For sake of clarity, only the results for a subset of IBMs presented in previous sections are discussed.

The pressure-correction method of Timmermans *et al.* [55] on a staggered grid is used to solve the velocity/pressure coupling of the Navier-Stokes equations. Implicit second-order central difference is used for the non-linear advection and stress terms. Due to the current implicit advection scheme an additional immersed boundary extrapolation of the velocity field to the ghost-cells is required [43]. Similar to the verification cases considered in Section 5.2, second-order Lagrange interpolations ( $p=2$ ) for the ghost and image points are primarily considered. Using third-order Lagrange interpolations ( $p=3$ ) with the LGS or QISS1 methods is also considered.

## 6.1 Verification Test Cases

The verification test cases currently considered are the canonical 2D annular Couette flow and 3D pipe flow. As these flows have exact analytical solutions the following discussion focuses on both the  $L^\infty$  and  $L^2$  error norms of  $\mathbf{u}$  and pressure attained with the currently proposed methods compared to the L method.

### 6.1.1 Annular Couette Flow

The first verification case is annular Couette flow for inner and outer cylinders with a radii of  $R_i$  and  $R_o$  of 0.02 and 0.1, respectively. The computational domain is  $[-9/80, 9/80]^2$  with grid sizes of  $(16\nu)^2$  and with Dirichlet IBCs derived from their analytical solutions. The analytical solution of annular Couette flow follows

$$\begin{aligned}
\vec{u} &= \vec{u}_\theta \vec{e}_\theta, \\
u_\theta(r) &= \frac{Ar}{2} + \frac{B}{r}, \\
p(r) &= p_0 - \frac{(Ar)^2}{8} + AB \ln(r) - \frac{1}{2} \left( \frac{B}{r} \right)^2,
\end{aligned} \tag{32}$$

where  $r$  is the distance from the center of inner cylinder,  $p_0=0$ , and the constants A and B follow,

$$\begin{aligned}
A &= 2 \frac{\omega_o R_o^2 - \omega_i R_i^2}{R_o^2 - R_i^2}, \\
B &= (\omega_i - \omega_o) \frac{(R_i R_o)^2}{R_o^2 - R_i^2},
\end{aligned} \tag{33}$$

where the  $\omega_i=0.5$  rad and  $\omega_o=0$  rad are the angular velocities for the inner and outer concentric cylinders, respectively.

Figure 20 shows the  $L^\infty$  and  $L^2$  error norms of  $\mathbf{u}$  and pressure for various grid sizes and IBMs for annular Couette flow, wherein, as expected, all proposed methods yield more accurate results. Second-order convergence is obtained for the  $L^2$  error norms for  $\mathbf{u}$  and pressure. The unexpected convergence (i.e. stair-like behavior) seen for the  $L^\infty$  error norm of  $\mathbf{u}$  for the LGS, Q, and QGS methods is consistent with [43] and is characteristic to many of the methods based on the standard linear method for the current test case. As seen from the  $L^\infty$  error norm of pressure, the standard linear method reaches an error saturation which is significantly reduced with the LGS, Q, and QGS methods. The LGS, Q, and QGS methods also locally increase the order of convergence of the  $L^\infty$  error norm of pressure between grids  $N^2=64$  and  $N^2=256$ .

The QISS1 method with third-order Lagrange interpolations both improves the convergence behavior (i.e. smooths out the previously seen stair-like behavior) and increase the order of convergence for the  $L^\infty$  error norms of pressure and velocity to second-order whilst maintaining the same stencil size of 2 as the L method. It should also be noted that this method does not exhibit any of the error saturation observed with the standard linear method. Extending the use of third-order Lagrange interpolations to the LGS method also yields improved convergence behaviors - reduced error saturation -for the  $L^\infty$  error norm for both  $\mathbf{u}$  and pressure (compared to the LGS method with  $p=2$  - blue dashed line), whilst maintaining a stencil size of 2.

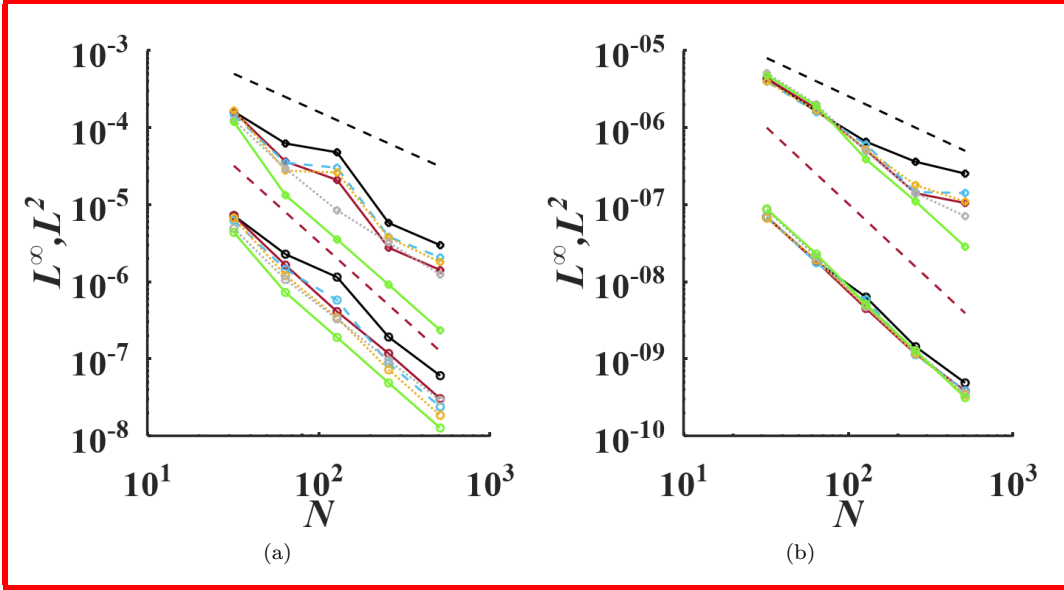


Figure 20:  $L^\infty$  and  $L^2$  norms of (a)  $\mathbf{u}$  and (b) pressure for various IBMs for annular Couette flow. Black solid line: L; Red solid line: LGS; Blue dashed line: Q; Orange dotted line: QGS; Grey dotted line: LGS with third-order Lagrange interpolations ( $p=3$ ); Green dotted line: QISS1 with  $p=3$ ;  $N$ : number of cells in the  $x$ -axis; Diamond symbols:  $L^\infty$  norm; Circle symbols:  $L^2$  norm. The  $L^2$  norms are shifted downwards by a factor of 10 for ease of reading. Black dashed line: first-order convergence; Red dashed line: second-order convergence.

### 6.1.2 Pipe Flow

The second verification case is laminar pipe flow parallel to the  $x$ -axis with a Reynolds number  $Re=2Ru_m/\nu=20$  and a radius  $R=3/4$ . The computational domain is  $[-1, 1]^3$  with grid sizes of  $(16\nu)^3$  and with Dirichlet IBCs derived from their analytical solutions. The analytical solution of pipe Poiseuille flow follows

$$\begin{aligned}\vec{u} &= \vec{u}_i \vec{e}_i, \\ u_x(y, z) &= u_m \left(1 - \frac{r^2}{R^2}\right), \\ p_x(x) &= p_0 - \frac{\partial p}{\partial x} x, \\ \frac{\partial p}{\partial x} &= -4u_m \frac{\nu}{R^2},\end{aligned}\tag{34}$$

where  $p_0=0$  is the initial pressure,  $u_m=1/(2R)$  is the maximum velocity,  $\nu=1/Re$  is the dynamic viscosity, and  $r^2=(y-y_c)^2+(z-z_c)^2$  is the distance to the axis of the pipe ( $x$ -axis).

Figure 21 shows the  $L^\infty$  and  $L^2$  error norms of  $\mathbf{u}$  and pressure for various grid sizes and IBMs for laminar pipe flow and as expected, with the  $L^\infty$  error norm, the L method has a second and first-order limiting behavior, respectively. Second-order convergence is obtained for pressure with the  $L^2$  error norm. It should be noted that the first-order convergence for the  $L^\infty$  norm of pressure is expected as it is also encountered for the canonical validation case of 2D channel Poiseuille flow without immersed boundaries. Also as expected, the LIS and QIS methods are more accurate than the L method and the  $L^\infty$  error norm of pressure has a slightly better order of convergence.

**Remark** As the analytical solution is parabolic, the combined use of QISS1, third-order Lagrange interpolations ( $p=3$ ), and extending the quadratic method with second-order Lagrange interpolations ( $p=2$ ) to the domain boundaries yields error fields with values close to machine epsilon whilst maintaining a stencil size of 2 as the L method.

## 6.2 Validation Test Cases

The validation test cases currently considered are the lid-driven cavity with an immersed cylinder, flow past a circular cylinder, flow past an isothermal and an isoflux heated circular cylinder, and flow past a sphere. As these flows do not have analytical solutions the following discussions primarily focus on the increased computational efficiency of the proposed methods for flows with more complex flow features.

### 6.2.1 Lid-Driven Cavity with an Immersed Cylinder

The first validation case is the lid-driven cavity with a stationary immersed cylinder case proposed by Cai *et al.* [56]. A circular cylinder at  $Re=1000$  with a diameter  $D=0.4L$  is placed in the middle of a square cavity with side length  $L=1$  and a grid size  $N^2=256^2$ . The boundary conditions for the domain boundaries for velocity are uniform flow  $\mathbf{u}=(1.0, 0.0)$  for the top wall and no-slip boundary conditions for the remaining boundary, while pressure increment has zero normal gradient for all domain boundaries. Appropriate Dirichlet and Neumann IBCs for  $\mathbf{u}$  and pressure increment, respectively, for no slip condition at the immersed boundaries are chosen. Figure 22 shows the

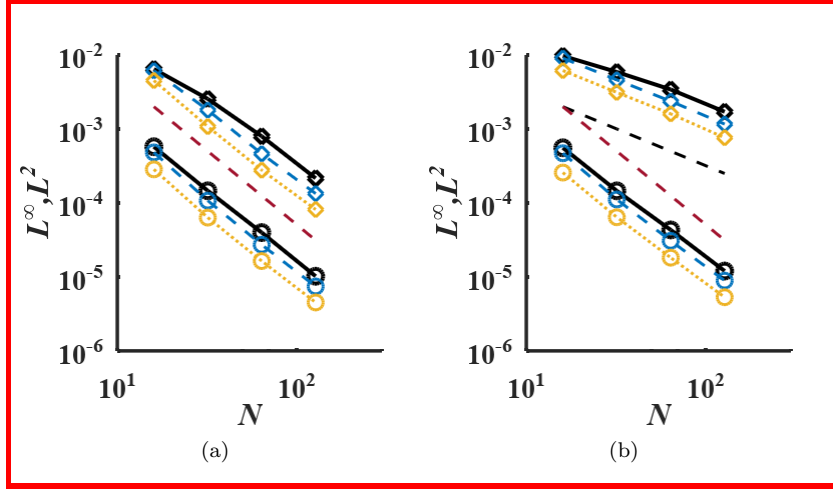


Figure 21:  $L^\infty$  and  $L^2$  norms of (a)  $\mathbf{u}$  and (b) pressure for various IBMs for laminar pipe flow at  $Re=20$ . Black solid line: L; Blue dashed line: LIS; Orange dotted line: QIS;  $N$ : number of cells in the  $x$ -axis; Diamond symbols:  $L^\infty$  norm; Circle symbols:  $L^2$  norm. The  $L^2$  norms are shifted downwards by a factor of 10 for ease of reading; Black dashed line: first-order convergence; Red dashed line: second-order convergence.

good agreement between the current  $u$  and  $v$ -velocity profiles along the  $y$  and  $x$ -direction centerline, respectively, for the LIS method with those of Cai *et al.* [56].

A lid-driven cavity with a rotating immersed boundary is also considered as part of the current validation test case. The numerical setup is identical to that for a stationary immersed boundary except for the angular velocity  $\omega=1$  rad of the circular cylinder and  $Re=5$ . Figure 23(a) shows the current  $u$  and  $v$ -velocity profiles along the  $y$  and  $x$ -direction centerline, respectively, and Figure 23(b) shows the distribution of the coefficient of pressure, as a function of  $\theta$ , along the surface of the circular cylinder for the L and QISS1 with third-order Lagrange interpolation ( $p=3$ ) methods. It should be noted that the reduced stencil size of 1 of LIS methods, compared to the stencil size of 2 of the L method, results in similar results as those presented in Figure 23.

To further highlight the improvements in accuracy and convergence order of the proposed LGS and QISS1 with  $p=3$  whilst maintaining the same stencil size of 2 as the L method, the  $L^\infty$  and  $L^2$  error norms of pressure are considered. As the current validation test case does not have an exact solution, the results obtained on a highly resolved grid  $N^2=512^2$  are used as the baseline when computing the error norms. The errors norms of velocity  $\mathbf{u}$  are not currently considered as the Dirichlet IBCs guarantee a second-order convergence as seen in Section 6.1. Figure 24 shows  $L^\infty$  and  $L^2$  error norms of pressure for the L method and, as expected, display first and in-between first and 1.5 order convergence, respectively. The results of the currently proposed LGS and QISS1 with  $p=3$  display an improved order of convergence and are significantly more accurate than those obtained with the L method. The LGS method with  $p=3$  has a 1.5 and 2nd order convergence for the  $L^\infty$  and  $L^2$  error norms, respectively, while the QISS1 with  $p=3$  displays a second-order convergence for both error norms.

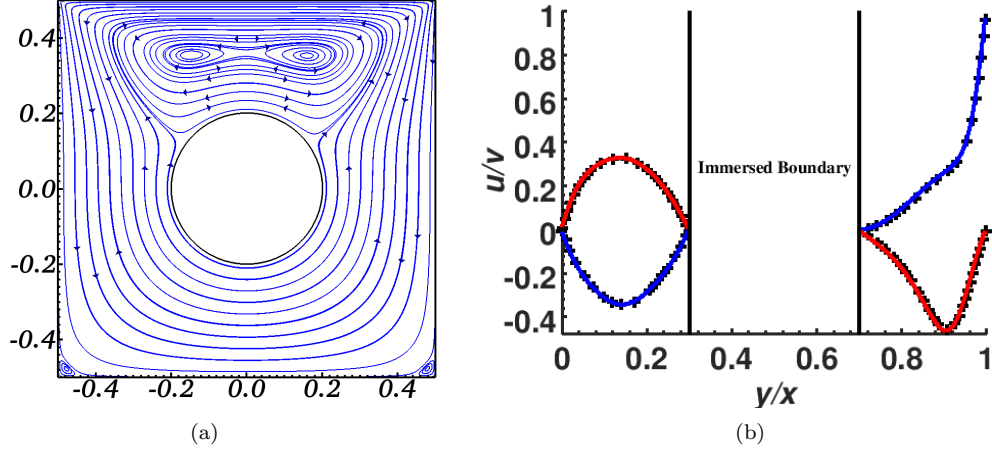


Figure 22: (a) Streamlines and (b) profiles of  $u$  and  $v$ -velocity along the  $y$  and  $x$ -direction centerline, respectively, for lid-driven cavity with a stationary immersed boundary at  $Re=1000$ . Blue line:  $u$ -velocity; Red line:  $v$ -velocity; Black +: Cai *et al.* [56].  $y$  and  $x$  in (b) correspond to  $r/L$ , where  $r$  is the Euclidean distance from  $(-0.5,0.0)$  or  $(0.0,-0.5)$  and  $L=1$  is the side length.

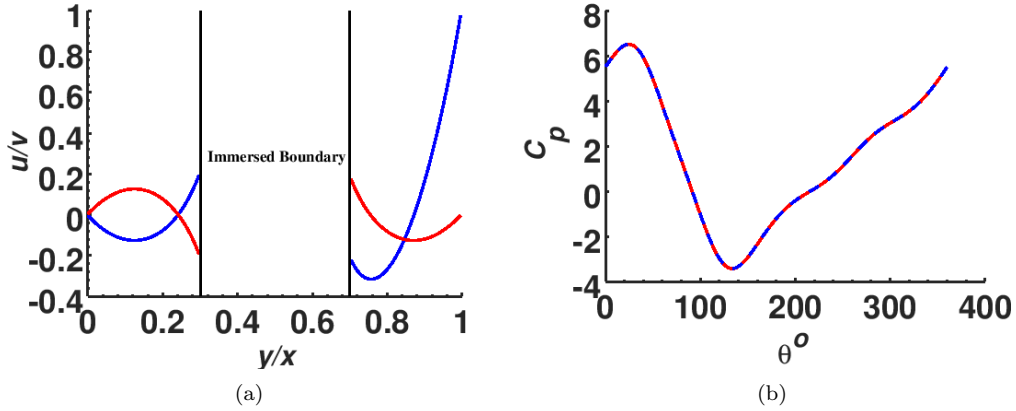


Figure 23: Profiles of (a)  $u$  and  $v$ -velocity along the  $y$  and  $x$ -direction centerline and (b) the distribution of the coefficient of pressure along the surface of the immersed boundary for lid-driven cavity with a rotating immersed boundary with an angular velocity  $\omega=1$  rad and a  $Re=5$ . (a) Blue line:  $u$ -velocity; Red line:  $v$ -velocity. (b) Blue line: L method; Red line: QISS1 method with third-order Lagrange interpolation ( $p=3$ ).

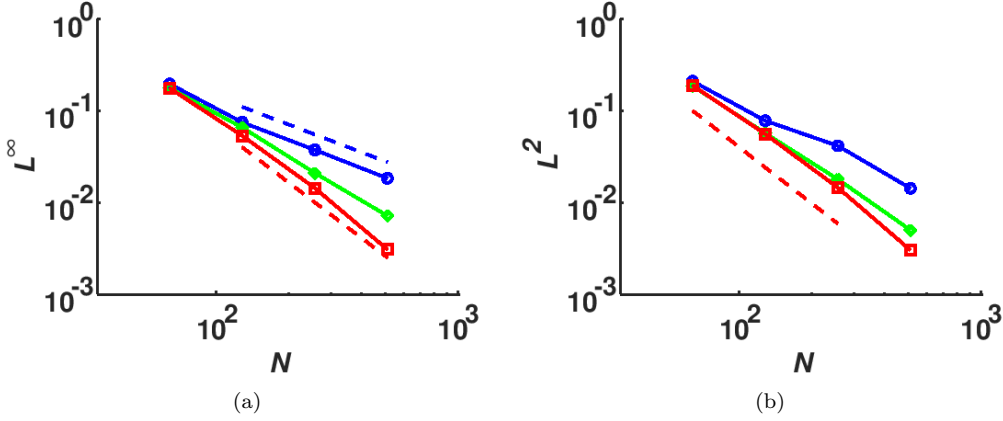


Figure 24: (a)  $L^\infty$  and (b)  $L^2$  norms of pressure for the L method, the LGS method with  $p=3$ , and the QISS1 method with  $p=3$  for lid-driven cavity with a rotating immersed boundary with  $\omega=1$  rad at  $Re=5$ . Blue solid line: L method; Green solid line: LGS method with  $p=3$ ; Red solid line: QISS1 method with  $p=3$ ; Blue dashed line:  $O(h)$ ; Red dashed line:  $O(h^2)$ ;  $N$ : number of cells in the  $x$ -axis.

### 6.2.2 Laminar Flow past a Circular Cylinder

The second validation case is steady laminar flow past a circular cylinder at  $Re=40$  with a diameter  $D=1.0$  placed at  $(x,y)=(15,11)D$  of a computational domain  $\Omega=[37.5D, 22D]$ . A non-uniform rectilinear grid of size  $1320 \times 720$  with a uniform Cartesian grid of size  $960 \times 480$  for the region around the circular cylinder enclosed by  $[-1.0, -1.0]$  and  $[3.0, 1.0]$  is used. Appropriate Dirichlet and Neumann IBCs for  $\mathbf{u}$  and pressure increment, respectively, for no slip condition at the immersed boundaries are chosen. The boundary conditions for the domain boundaries for velocity are a uniform flow  $\mathbf{u}=(1.0,0.0)$  at the inlet, zero-gradient at the outlet, and slip boundary condition for the remaining domain boundaries, while pressure increment has Dirichlet boundary conditions of zero for the outlet and zero normal gradient for the remaining domain boundaries. Table 5 shows the good agreement in the coefficient of drag and the non-dimensional wake bubble length  $L_w/D$ , where  $L_w$  is the dimensional wake bubble length, while Figure 25 shows the good agreement of the distribution of the coefficient of pressure, as a function of  $\theta$ , along the surface of the circular cylinder for steady flow at  $Re=40$ .

### 6.2.3 Laminar Flow past a Heated Circular Cylinder

The third validation case is steady laminar flow past an isothermal and an isoflux heated circular cylinder at  $Re=20$  and Prandtl number  $Pr=0.70$  with a diameter  $D=1.0$  placed at  $(x,y)=(15,11)D$  of a computational domain  $\Omega=[37.5D, 22D]$ . Non-uniform rectilinear grids of sizes  $880 \times 480$  with uniform Cartesian grid of sizes  $640 \times 320$  for the region around the circular cylinder enclosed by  $[-1.0, -1.0]$  and  $[3.0, 1.0]$  are used. The boundary conditions for  $\mathbf{u}$  and pressure increment are the same as those presented in Section 6.2.2. The boundary conditions for temperature at the immersed boundary is uniform temperature  $T=1$  and uniform heat flux  $\partial T/\partial n=1$  for the isothermal and isoflux cases, respectively, while a uniform temperature  $T=0$  is applied at the inlet and zero-

|                               | $C_D$ | $L_w/D$ |
|-------------------------------|-------|---------|
| Russel and Wang [57]          | 1.60  | 2.25    |
| Taira and Colonius [58]       | 1.54  | 2.30    |
| Matsumura and Jackson [59]    | 1.55  | 2.31    |
| Calhoun [60]                  | 1.62  | 2.18    |
| Xu and Wang [61]              | 1.66  | 2.21    |
| Berthelsen and Faltinsen [62] | 1.59  | 2.29    |
| Current(LIS)                  | 1.585 | 2.253   |

Table 5: Coefficient of drag  $C_D$  and non-dimensional wake bubble length  $L_w/D$  for steady flow past a circle at  $Re=40$ .

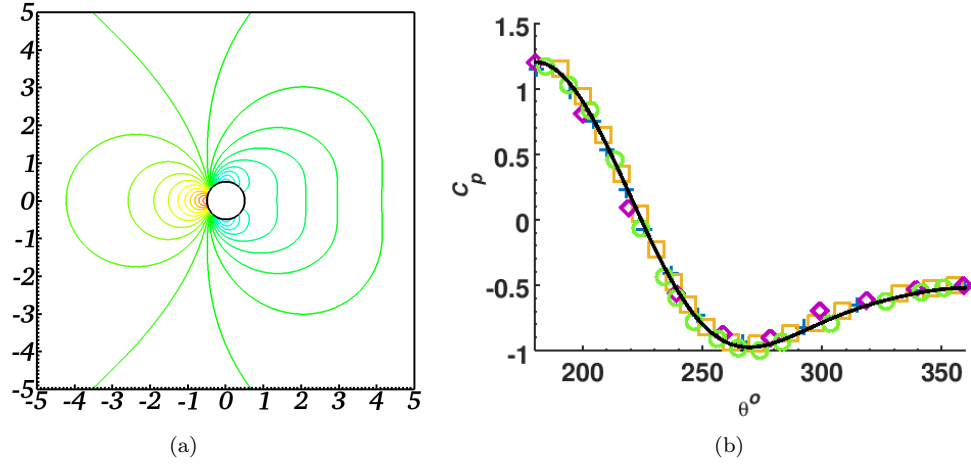


Figure 25: (a) Pressure contour lines and (b) normalized coefficient of pressure  $C_p$  distribution along the surface of a circular cylinder for steady flow at  $Re=40$ . Solid black line: Current results with the LIS method; Blue +: Dennis and Chang [63]; Orange square: Berthelsen and Faltinsen [62]; Purple diamond: Grove *et al.* [64]; Green o: Tseng and Ferziger [65].

gradient  $\partial T/\partial n$  is used for the remaining domain boundaries. Table 6 shows the good agreement in the average Nusselt number while Figure 27 shows the good agreement in the distribution of the local Nusselt number along the surface of the heated circular cylinder.

|                           | Isothermal | Isoflux |
|---------------------------|------------|---------|
| Luo <i>et al.</i> [45]    | 2.4336     | 2.7850  |
| Zhang <i>et al.</i> [66]  | 2.47       | 2.75    |
| Bharti <i>et al.</i> [67] | 2.4653     | 2.7788  |
| Dennis <i>et al.</i> [68] | 2.5216     | —       |
| Lange <i>et al.</i> [69]  | 2.4087     | —       |
| Soares <i>et al.</i> [70] | 2.4300     | —       |
| Ahmad and Qureshi [71]    | —          | 2.6620  |
| Current(LIS)              | 2.4272     | 2.7916  |

Table 6: Average Nusselt number  $\overline{Nu}$  for forced convection steady laminar flow past an isothermal and an isoflux circle at  $Re=20$  and  $Pr=0.70$ .

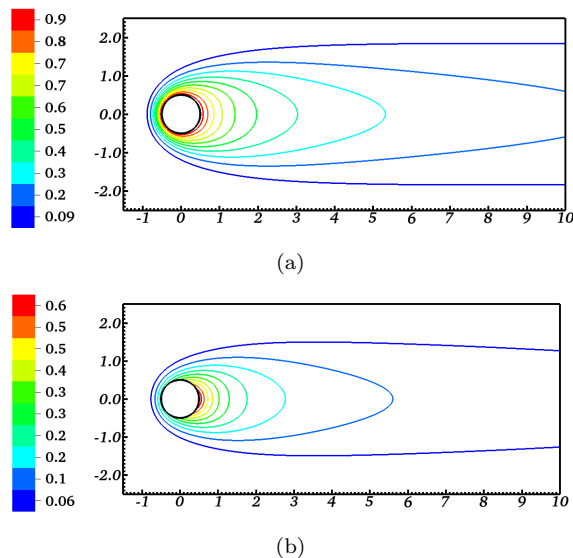


Figure 26: Temperature contour lines for forced convection steady laminar flow past an (a) isothermal and (b) isoflux at  $Re=20$ .

#### 6.2.4 Laminar Flow past a Sphere

The fourth validation case, shown in Figure 28, is steady laminar flow past a sphere at  $Re=50$ , 100, and 150 with a diameter  $D=1.0$  placed at  $(x,y,z)=(12.5,8.5,8.5)D$  of a computational domain  $\Omega=[31.25D, 17D, 17D]$ . A non-uniform rectilinear grid of size  $275 \times 150^2$  with a uniform Cartesian grid of size  $160 \times 80^2$  for the region around the sphere enclosed by  $[-1.0, -1.0, -1.0]$  and  $[3.0, 1.0, 1.0]$  is used for all Reynolds numbers considered. Appropriate Dirichlet and Neumann IBCs for  $\mathbf{u}$  and

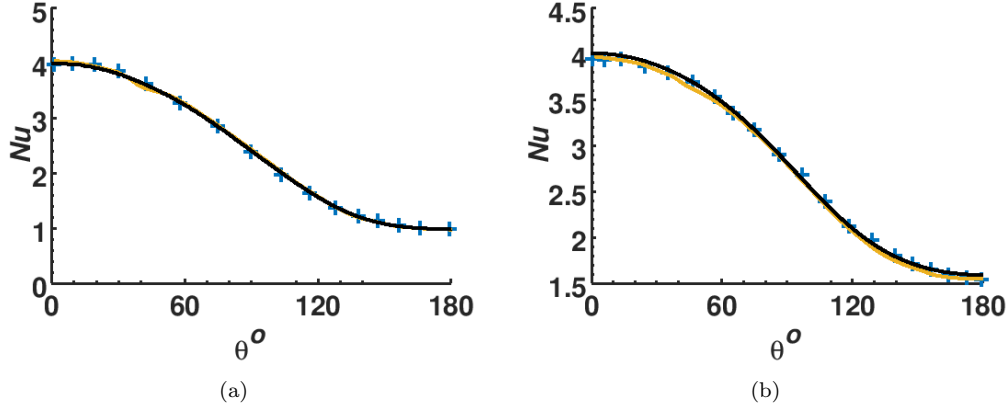


Figure 27: Local Nusselt number for forced convection steady laminar flow past an (a) isothermal and an (b) isoflux circle at  $Re=20$  and  $Pr=0.70$ . Blue +: Bharti *et al.* [67]; Orange line: Zhang *et al.* [66]; Black line: Current results.

pressure increment, respectively, for no slip condition at the immersed boundaries are chosen. The boundary conditions for the domain boundaries for velocity are a uniform flow  $\mathbf{u}=(1.0,0.0,0.0)$  at the inlet, zero-gradient at the outlet and slip boundary condition for the remaining domain boundaries, while pressure increment has Dirichlet boundary conditions of zero for the outlet and zero normal gradient for the remaining domain boundaries. Table 7 shows the good agreement in the coefficient of drag  $C_D$  and the non-dimensional wake bubble length  $L_w/D$ , where  $L_w$  is the wake bubble length. Although the results in Table 7 are for the LIS method, similar results are obtained with the L method.

| Reynolds Number                      | 50    |         | 100   |         | 150   |         |
|--------------------------------------|-------|---------|-------|---------|-------|---------|
|                                      | $C_D$ | $L_w/D$ | $C_D$ | $L_w/D$ | $C_D$ | $L_w/D$ |
| Mittal [72]                          | 1.57  | 0.44    | 1.09  | 0.87    | —     | —       |
| Johnson and Patel <i>et al.</i> [73] | 1.57  | 0.40    | 1.08  | 0.86    | 0.90  | 1.20    |
| Marella <i>et al.</i> [74]           | 1.56  | 0.39    | 1.06  | 0.90    | 0.85  | 1.19    |
| Current(LIS)                         | 1.59  | 0.40    | 1.09  | 0.86    | 0.89  | 1.18    |

Table 7: Coefficient of drag  $C_D$  and non-dimensional wake bubble length  $L_w/D$  for steady flow past a sphere at  $Re=50$ , 100, and 150.

### 6.3 Performance Analysis

In this section the increase in performance (i.e. smaller total run times and smaller memory requirements) of the proposed methods are presented. It should be noted although a small discussion on the performance of the presented methods is pursued, this topic is beyond the scope of the current paper.

When solving PDE implicitly the profile of the band matrix is governed by the stencil size of the discretization schemes used for the various partial differential terms. For instance, a 5 (7 in 3D)

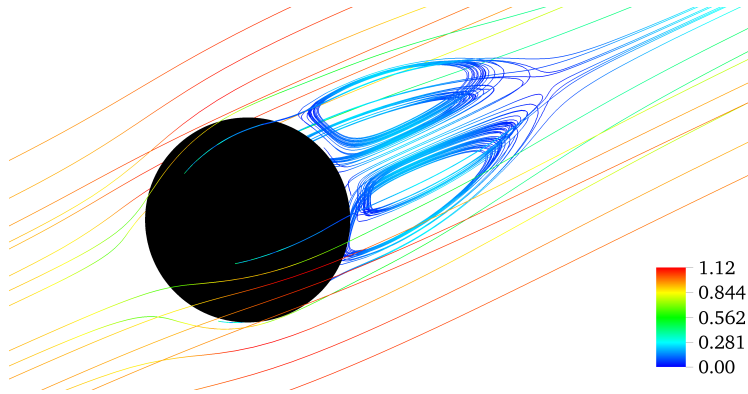


Figure 28: Streamlines coloured by velocity magnitude for steady laminar flow past a sphere immersed boundary at  $Re=150$ .

band matrix is associated to the standard 5 (7 in 3D) point stencil of the second-order centered difference scheme of the diffusion term. This eases the storage of the matrix since the relative position of each element of the matrix is the same regardless of the band it belongs to. In the *hypr* library [53,54], the *struct* or *sstruct* interfaces are dedicated to this approach and require the description of the stencil as input. This is in contrast to the algebraic interface which is based on an *ij* entrance (line/column) of each element in the matrix to fully describe the compressed sparse row (CSR) matrix file format. With a band matrix the matrix-vector product is both simplified and accelerated compared to the CSR approach which needs an array indirection. It should be noted that the latter approach is best suited for unstructured codes. As such, the Notus code relies on a the *hypr struct* interface for scalar equations and the *sstruct* interface for the Navier-Stokes equations. This approach also allows the use of the geometric multigrid preconditioners, such as the SMG [75] and PFMG [76] in the *hypr* library, which tend to be more efficient than the algebraic ones [43, 77–81].

For the immersed boundary methods and governing equations currently considered a stencil size of 1 leads to a 9 (27) band matrix in 2D (3D), while a stencil size of 2 leads to a 25 (125 in 3D) band matrix. In addition, in 3D the memory requirements are increase by - almost - a factor 5. Since the immersed boundaries are only present in a part of the domain, a large portion of the additionally required bands are filled with a value of 0. As such, keeping a stencil size of 1 overcomes this significant performance penalty. The impact of increasing the number of bands on the matrix-vector product is not negligible and given that this operation constitutes a large computing portion of Krylov subspace solver increases in the numbers of bands in a matrix should not be overlooked. Table 8 shows the total CPU times for various IBMs for the pipe flow test case with a grid size  $128^3$ . For the momentum equation, the LIS, LGS or QISS1 methods with a stencil size of 1 are  $\sim 2.5$  times faster than the standard linear method with a stencil size of 2. The effect of the CSR file format for the standard linear method has not been pursued since this solver interface is not currently available and as the current scope of the paper is to maintain the same stencil size as those required to discretize the PDE terms in the governing equations. It should be noted that the impact of a stencil size of 2 for the quadratic methods cannot be overlooked, especially for the QISS1 method with  $p=3$  and the momentum equation. As these methods have the same number of

| IBM         | Stencil Size | Total Wall Clock time [s] |     |     |
|-------------|--------------|---------------------------|-----|-----|
|             |              | A                         | B   | C   |
| L           | 2            | 8.1                       | 4.2 | —   |
| LGS         | 1            | 2.9                       | 1.1 | 2.2 |
| LIS         | 1            | 3.3                       | 1.1 | 2.2 |
| QIS         | 2            | 18.2                      | 4.1 | —   |
| QISS1 $p=3$ | 2            | 33.3                      | 4.3 | —   |
| QISS1       | 1            | 3.4                       | 1.1 | 2.2 |

Table 8: Total wall clock time and stencil size various IBMs for a single time iteration of a laminar pipe flow at  $Re=20$  with a grid size  $N^3=128^3$ . A: Momentum equation solved with the BiCGStab and the point Jacobi preconditioner; B: Correction step solved with the BiCGStab and the Boomer-AMG preconditioner; C: Correction step solved with the BiCGStab and the PFMG preconditioner.

bands in the matrix as the standard linear method it can be deduced that the quadratic methods have a strong effect on the matrix condition number. Finally, the proposed quadratic method QISS1 with a stencil size of 1 yields CPU times similar to those of the LIS and LGS methods.

To confirm some of this meaningful decreases in time for the proposed methods with a stencil size of 1, a speed-up of 3.1 is observed for the LIS method for laminar steady flow past a sphere at  $Re=50$ . For the currently considered 2D verification and validation test cases, a speed-up of  $\sim 1.7$  is observed for the LGS method for grid sizes of  $256^2$ .

## 7 Conclusion

Although IBMs with a stencil size of 2 for Cartesian grids, such as the linear method [1], are widely used, they pose significant constraints in the pursuit of smaller total run times, smaller memory requirements, increased accuracy, and increase order of convergence. To address these shortcomings the linear square shifting and the quadratic square shifting ghost-cell methods, and their various combinations are proposed. The proposed linear square shifting methods consistently yield a maximum stencil size of 1 by shifting the ghost point and, consequently, the image point, or solely the image point, towards the immersed boundary, whilst the quadratic square shifting ghost-cell methods derived from [3] increases the accuracy of the results through quadratic interpolations for the ghost-cell values whilst maintaining a maximum stencil size of 2. Lastly, the quadratic square shifting method with the first image point shift and with a maximum stencil size artificially increased from 1 to 2 through third-order Lagrange interpolations is also proposed to increase the order of convergence of Neumann immersed boundary conditions from first to second-order.

Numerical simulations of the canonical Poisson test problem with parabolic and trigonometric analytical solutions for various 2D and 3D immersed boundaries with Dirichlet and Neumann IBCs for nine combinations of the square shift and quadratic square shifting methods further emphasises the need for a maximum stencil size of 1 and more accurate interpolation methods for the ghost-cells. For Dirichlet IBCs the reduced stencil size of the linear square shift methods tends to yield more accurate results and improved second-order convergence when compared with the linear method. The accuracy of the results is further increased when the quadratic method is used in conjunction with the square shifting methods (i.e. QGS, QIS, etc.).

Although for Neumann IBCs the proposed methods yield smaller improvements in accuracy

and negligible improvements in the first-order convergence of the linear method for the parabolic analytical solution to the Poisson test problem, the reduced stencil size results in smaller run times. However, the combined use of the QISS1 method and third-order Lagrange interpolations for the image and ghost points yields more accurate results and error norms with second-order convergence while maintaining the same maximum stencil size of 2 as the linear method, which results in first-order convergence.

The numerical accuracy and computational improvements of the square shifting methods, quadratic square shifting methods, and the combinations of these methods are also observed for the velocity and pressure variables for various verification and validation test cases for the Navier-Stokes governing equations. For the verification test cases, the proposed methods yield more accurate results and either improve the convergence behavior or increase the order of convergence of the error norms. As seen from the various validation cases, the proposed methods are able to accurately capture the velocity, pressure, and temperature flow fields. In addition the combined use of the QISS1 method and third-order Lagrange interpolations for the image and ghost points results in second-order convergence for the pressure field with Neumann IBCs for a lid driven cavity with a rotating immersed cylinder. Similar to the verification test cases, the proposed methods with a maximum stencil size of 1 also yield speed-ups of at least 3 for 3D flows.

## Acknowledgements

We acknowledge the French National Research Agency for its support (ANR-17-CE07-0029-SUPERFON) and the MCIA (Mésocentre de Calcul Intensif Aquitaine) for the HPC resources.

## References

- [1] R. Mittal, H. Dong, M. Bozkurtas, F. Najjar, A. Vargas, and A. Von Loebbecke, “A versatile sharp interface immersed boundary method for incompressible flows with complex boundaries,” *Journal of computational physics*, vol. 227, no. 10, pp. 4825–4852, 2008.
- [2] S. Das, N. G. Deen, and J. Kuipers, “Direct numerical simulation for flow and heat transfer through random open-cell solid foams: Development of an ibm based cfd model,” *Catalysis Today*, vol. 273, pp. 140–150, 2016.
- [3] S. Das, A. Panda, N. Deen, and J. Kuipers, “A sharp-interface immersed boundary method to simulate convective and conjugate heat transfer through highly complex periodic porous structures,” *Chemical Engineering Science*, vol. 191, pp. 1–18, 2018.
- [4] C. S. Peskin, “Flow patterns around heart valves: a numerical method,” *Journal of computational physics*, vol. 10, no. 2, pp. 252–271, 1972.
- [5] R. Mittal and G. Iaccarino, “Immersed boundary methods,” *Annu. Rev. Fluid Mech.*, vol. 37, pp. 239–261, 2005.
- [6] W. Xiao, H. Zhang, K. Luo, C. Mao, and J. Fan, “Immersed boundary method for multiphase transport phenomena,” *Reviews in Chemical Engineering*, vol. 1, no. ahead-of-print, 2020.
- [7] B. E. Griffith and N. A. Patankar, “Immersed methods for fluid–structure interaction,” *Annual review of fluid mechanics*, vol. 52, pp. 421–448, 2020.

- [8] F. Sotiropoulos and X. Yang, “Immersed boundary methods for simulating fluid–structure interaction,” *Progress in Aerospace Sciences*, vol. 65, pp. 1–21, 2014.
- [9] S. Haeri and J. Shrimpton, “On the application of immersed boundary, fictitious domain and body-conformal mesh methods to many particle multiphase flows,” *International Journal of Multiphase Flow*, vol. 40, pp. 38–55, 2012.
- [10] W.-X. Huang and F.-B. Tian, “Recent trends and progress in the immersed boundary method,” *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*, vol. 233, no. 23-24, pp. 7617–7636, 2019.
- [11] J. U. Brackbill, D. B. Kothe, and C. Zemach, “A continuum method for modeling surface tension,” *Journal of computational physics*, vol. 100, no. 2, pp. 335–354, 1992.
- [12] V. R. Voller and C. Prakash, “A fixed grid numerical modelling methodology for convection-diffusion mushy region phase-change problems,” *International journal of heat and mass transfer*, vol. 30, no. 8, pp. 1709–1719, 1987.
- [13] J. Li, P. Agyakwa, and C. Johnson, “A fixed-grid numerical modelling of transient liquid phase bonding and other diffusion-controlled phase changes,” *Journal of materials science*, vol. 45, no. 9, pp. 2340–2350, 2010.
- [14] V. Arias, D. Bochkov, and F. Gibou, “Poisson equations in irregular domains with robin boundary conditions—solver with second-order accurate gradients,” *Journal of Computational Physics*, vol. 365, pp. 1–6, 2018.
- [15] A. Coco and G. Russo, “Second order finite-difference ghost-point multigrid methods for elliptic problems with discontinuous coefficients on an arbitrary interface,” *Journal of Computational Physics*, vol. 361, pp. 299–330, 2018.
- [16] D. Bochkov and F. Gibou, “Solving elliptic interface problems with jump conditions on cartesian grids,” *Journal of Computational Physics*, vol. 407, p. 109269, 2020.
- [17] R. Egan and F. Gibou, “xgfm: Recovering convergence of fluxes in the ghost fluid method,” *Journal of Computational Physics*, vol. 409, p. 109351, 2020.
- [18] J. Papac, A. Helgadottir, C. Ratsch, and F. Gibou, “A level set approach for diffusion and stefan-type problems with robin boundary conditions on quadtree/octree adaptive cartesian grids,” *Journal of Computational Physics*, vol. 233, pp. 241–261, 2013.
- [19] F. Gibou, R. P. Fedkiw, L.-T. Cheng, and M. Kang, “A second-order-accurate symmetric discretization of the poisson equation on irregular domains,” *Journal of Computational Physics*, vol. 176, no. 1, pp. 205–227, 2002.
- [20] F. Gibou and R. Fedkiw, “A fourth order accurate discretization for the laplace and heat equations on arbitrary domains, with applications to the stefan problem,” *Journal of Computational Physics*, vol. 202, no. 2, pp. 577–601, 2005.
- [21] F. Gibou and C. Min, “Efficient symmetric positive definite second-order accurate monolithic solver for fluid/solid interactions,” *Journal of Computational Physics*, vol. 231, no. 8, pp. 3246–3263, 2012.

- [22] M. Latige, T. Colin, and G. Gallice, “A second order cartesian finite volume method for elliptic interface and embedded dirichlet problems,” *Computers & Fluids*, vol. 83, pp. 70–76, 2013.
- [23] M. Oevermann, C. Scharfenberg, and R. Klein, “A sharp interface finite volume method for elliptic equations on cartesian grids,” *Journal of Computational Physics*, vol. 228, no. 14, pp. 5184–5206, 2009.
- [24] Y. Zhou, S. Zhao, M. Feig, and G.-W. Wei, “High order matched interface and boundary method for elliptic equations with discontinuous coefficients and singular sources,” *Journal of Computational Physics*, vol. 213, no. 1, pp. 1–30, 2006.
- [25] Y. Cheny and O. Botella, “The ls-stag method: A new immersed boundary/level-set method for the computation of incompressible viscous flows in complex moving geometries with good conservation properties,” *Journal of Computational Physics*, vol. 229, no. 4, pp. 1043–1076, 2010.
- [26] G. Dechristé and L. Mieussens, “A cartesian cut cell method for rarefied flow simulations around moving obstacles,” *Journal of Computational Physics*, vol. 314, pp. 465–488, 2016.
- [27] P. Brady and D. Livescu, “Foundations for high-order, conservative cut-cell methods: Stable discretizations on degenerate meshes,” *Journal of Computational Physics*, vol. 426, p. 109794, 2021.
- [28] H. Johansen and P. Colella, “A cartesian grid embedded boundary method for poisson’s equation on irregular domains,” *Journal of Computational Physics*, vol. 147, no. 1, pp. 60–85, 1998.
- [29] P. Schwartz, M. Barad, P. Colella, and T. Ligocki, “A cartesian grid embedded boundary method for the heat equation and poisson’s equation in three dimensions,” *Journal of Computational Physics*, vol. 211, no. 2, pp. 531–550, 2006.
- [30] D. Bochkov and F. Gibou, “Solving poisson-type equations with robin boundary conditions on piecewise smooth interfaces,” *Journal of Computational Physics*, vol. 376, pp. 1156–1198, 2019.
- [31] V. Kumar, A. Sharma, and R. Singh, “Central upwind scheme based immersed boundary method for compressible flows around complex geometries,” *Computers & Fluids*, vol. 196, p. 104349, 2020.
- [32] K. Menon and R. Mittal, “Flow physics and dynamics of flow-induced pitch oscillations of an airfoil,” *J. Fluid Mech*, vol. 877, pp. 582–613, 2019.
- [33] M. E. Khalili, M. Larsson, and B. Müller, “Immersed boundary method for viscous compressible flows around moving bodies,” *Computers & Fluids*, vol. 170, pp. 77–92, 2018.
- [34] M. D. Griffith, D. Lo Jacono, J. Sheridan, and J. S. Leontini, “Flow-induced vibration of two cylinders in tandem and staggered arrangements,” *Journal of Fluid Mechanics*, vol. 833, pp. 98–130, 2017.
- [35] J. Lee and D. You, “An implicit ghost-cell immersed boundary method for simulations of moving body problems with control of spurious force oscillations,” *Journal of Computational Physics*, vol. 233, pp. 295–314, 2013.

- [36] J. H. Seo, H. Bakhshaei, G. Garreau, C. Zhu, A. Andreou, W. R. Thompson, and R. Mittal, "A method for the computational modeling of the physics of heart murmurs," *Journal of Computational Physics*, vol. 336, pp. 546–568, 2017.
- [37] P. Balogh and P. Bagchi, "A computational approach to modeling cellular-scale blood flow in complex geometry," *Journal of Computational Physics*, vol. 334, pp. 280–307, 2017.
- [38] M. Bergmann and A. Iollo, "Bioinspired swimming simulations," *Journal of Computational Physics*, vol. 323, pp. 310–321, 2016.
- [39] H. Dong, M. Bozkurttas, R. Mittal, P. Madden, and G. Lauder, "Computational modelling and analysis of the hydrodynamics of a highly deformable fish pectoral fin," *Journal of Fluid Mechanics*, vol. 645, p. 345, 2010.
- [40] G. Liu, H. Dong, and C. Li, "Vortex dynamics and new lift enhancement mechanism of wing-body interaction in insect forward flight," *Journal of Fluid Mechanics*, vol. 795, p. 634, 2016.
- [41] A. Coco and G. Russo, "Finite-difference ghost-point multigrid methods on cartesian grids for elliptic problems in arbitrary domains," *Journal of Computational Physics*, vol. 241, pp. 464–501, 2013.
- [42] A. Coco, "A multigrid ghost-point level-set method for incompressible navier-stokes equations on moving domains with curved boundaries," *Journal of Computational Physics*, vol. 418, p. 109623, 2020.
- [43] J. Picot and S. Glockner, "Reduction of the discretization stencil of direct forcing immersed boundary methods on rectangular cells: The ghost node shifting method," *Journal of Computational Physics*, vol. 364, pp. 18–48, 2018.
- [44] R. Sandberg and L. Jones, "Direct numerical simulations of low reynolds number flow over airfoils with trailing-edge serrations," *Journal of Sound and Vibration*, vol. 330, no. 16, pp. 3818–3831, 2011.
- [45] K. Luo, Z. Zhuang, J. Fan, and N. E. L. Haugen, "A ghost-cell immersed boundary method for simulations of heat transfer in compressible flows under different boundary conditions," *International Journal of Heat and Mass Transfer*, vol. 92, pp. 708–717, 2016.
- [46] N. S. Dhamankar, G. A. Blaisdell, and A. S. Lyrantzis, "Implementation of a sharp immersed boundary method in a 3-d multi-block large eddy simulation tool for jet aeroacoustics," in *53rd AIAA Aerospace Sciences Meeting*, p. 0504, 2015.
- [47] C. Chi, B. J. Lee, and H. G. Im, "An improved ghost-cell immersed boundary method for compressible flow simulations," *International Journal for Numerical Methods in Fluids*, vol. 83, no. 2, pp. 132–148, 2017.
- [48] F. Auguste, G. Réa, R. Paoli, C. Lac, V. Masson, and D. Cariolle, "Implementation of an immersed boundary method in the meso-nh v5. 2 model: applications to an idealized urban environment," *Geoscientific Model Development*, vol. 12, no. 6, pp. 2607–2633, 2019.
- [49] A. Lemoine, S. Glockner, and J. Breil, "Moment-of-fluid analytic reconstruction on 2d cartesian grids," *Journal of Computational Physics*, vol. 328, pp. 131–139, 2017.

- [50] M. Coquerelle and S. Glockner, “A fourth-order accurate curvature computation in a level set framework for two-phase flows subjected to surface tension forces,” *Journal of Computational Physics*, vol. 305, pp. 838–876, 2016.
- [51] Notus, “Notus computational fluid dynamics code.” <https://notus-cfd.org/>, May 2019.
- [52] J. A. Mousel, “A massively parallel adaptive sharp interface solver with application to mechanical heart valve simulations,” *Ph. D thesis, The University of Iowa*, 2012.
- [53] R. D. Falgout and U. M. Yang, “hypre: A library of high performance preconditioners,” in *International Conference on Computational Science*, pp. 632–641, Springer, 2002.
- [54] R. D. Falgout, J. E. Jones, and U. M. Yang, “The design and implementation of hypre, a library of parallel high performance preconditioners,” in *Numerical solution of partial differential equations on parallel computers*, pp. 267–294, Springer, 2006.
- [55] L. Timmermans, P. Mineev, and F. Van De Vosse, “An approximate projection scheme for incompressible flow using spectral elements,” *International journal for numerical methods in fluids*, vol. 22, no. 7, pp. 673–688, 1996.
- [56] S.-G. Cai, A. Ouahsine, J. Favier, and Y. Hoarau, “Moving immersed boundary method,” *International Journal for Numerical Methods in Fluids*, vol. 85, no. 5, pp. 288–323, 2017.
- [57] D. Russell and Z. J. Wang, “A cartesian grid method for modeling multiple moving objects in 2d incompressible viscous flow,” *Journal of Computational Physics*, vol. 191, no. 1, pp. 177–205, 2003.
- [58] K. Taira and T. Colonius, “The immersed boundary method: a projection approach,” *Journal of Computational Physics*, vol. 225, no. 2, pp. 2118–2137, 2007.
- [59] Y. Matsumura and T. Jackson, “Numerical simulation of fluid flow through random packs of cylinders using immersed boundary method,” *Physics of Fluids*, vol. 26, no. 4, p. 043602, 2014.
- [60] D. Calhoun, “A cartesian grid method for solving the two-dimensional streamfunction-vorticity equations in irregular regions,” *Journal of computational physics*, vol. 176, no. 2, pp. 231–275, 2002.
- [61] S. Xu and Z. J. Wang, “An immersed interface method for simulating the interaction of a fluid with moving boundaries,” *Journal of Computational Physics*, vol. 216, no. 2, pp. 454–493, 2006.
- [62] P. A. Berthelsen and O. M. Faltinsen, “A local directional ghost cell approach for incompressible viscous flow problems with irregular boundaries,” *Journal of computational physics*, vol. 227, no. 9, pp. 4354–4397, 2008.
- [63] S. Dennis and G.-Z. Chang, “Numerical solutions for steady flow past a circular cylinder at reynolds numbers up to 100,” *Journal of Fluid Mechanics*, vol. 42, no. 3, pp. 471–489, 1970.
- [64] A. S. Grove, F. Shair, and E. Petersen, “An experimental investigation of the steady separated flow past a circular cylinder,” *Journal of Fluid Mechanics*, vol. 19, no. 1, pp. 60–80, 1964.

- [65] Y.-H. Tseng and J. H. Ferziger, “A ghost-cell immersed boundary method for flow in complex geometry,” *Journal of computational physics*, vol. 192, no. 2, pp. 593–623, 2003.
- [66] N. Zhang, Z. Zheng, and S. Eckels, “Study of heat-transfer on the surface of a circular cylinder in flow using an immersed-boundary method,” *International Journal of Heat and Fluid Flow*, vol. 29, no. 6, pp. 1558–1566, 2008.
- [67] R. P. Bharti, R. Chhabra, and V. Eswaran, “A numerical study of the steady forced convection heat transfer from an unconfined circular cylinder,” *Heat and mass transfer*, vol. 43, no. 7, pp. 639–648, 2007.
- [68] S. C. R. Dennis, J. Hudson, and N. Smith, “Steady laminar forced convection from a circular cylinder at low reynolds numbers,” *The Physics of Fluids*, vol. 11, no. 5, pp. 933–940, 1968.
- [69] C. Lange, F. Durst, and M. Breuer, “Momentum and heat transfer from cylinders in laminar crossflow,” *International Journal of Heat and Mass Transfer*, vol. 41, no. 22, pp. 3409–3430, 1998.
- [70] A. Soares, J. Ferreira, and R. Chhabra, “Flow and forced convection heat transfer in crossflow of non-newtonian fluids over a circular cylinder,” *Industrial & Engineering Chemistry Research*, vol. 44, no. 15, pp. 5815–5827, 2005.
- [71] R. Ahmad and Z. Qureshi, “Laminar mixed convection from a uniform heat flux horizontal cylinder in a crossflow,” *Journal of thermophysics and heat transfer*, vol. 6, no. 2, pp. 277–287, 1992.
- [72] R. Mittal, “A fourier–chebyshev spectral collocation method for simulating flow past spheres and spheroids,” *International journal for numerical methods in fluids*, vol. 30, no. 7, pp. 921–937, 1999.
- [73] T. Johnson and V. Patel, “Flow past a sphere up to a reynolds number of 300,” *Journal of Fluid Mechanics*, vol. 378, pp. 19–70, 1999.
- [74] S. Marella, S. Krishnan, H. Liu, and H. Udaykumar, “Sharp interface cartesian grid method i: an easily implemented technique for 3d moving boundary computations,” *Journal of Computational Physics*, vol. 210, no. 1, pp. 1–31, 2005.
- [75] P. N. Brown, R. D. Falgout, and J. E. Jones, “Semicoarsening multigrid on distributed memory machines,” *SIAM Journal on Scientific Computing*, vol. 21, no. 5, pp. 1823–1834, 2000.
- [76] S. F. Ashby and R. D. Falgout, “A parallel multigrid preconditioned conjugate gradient algorithm for groundwater flow simulations,” *Nuclear Science and Engineering*, vol. 124, no. 1, pp. 145–159, 1996.
- [77] U. M. Yang *et al.*, “Boomeramg: a parallel algebraic multigrid solver and preconditioner,” *Applied Numerical Mathematics*, vol. 41, no. 1, pp. 155–177, 2002.
- [78] U. Langer and D. Pusch, “Comparison of geometrical and algebraic multigrid preconditioners for data-sparse boundary element matrices,” in *International Conference on Large-Scale Scientific Computing*, pp. 130–137, Springer, 2005.

- [79] H. De Sterck, U. M. Yang, and J. J. Heys, “Reducing complexity in parallel algebraic multigrid preconditioners,” *SIAM Journal on Matrix Analysis and Applications*, vol. 27, no. 4, pp. 1019–1039, 2006.
- [80] A. H. Baker, R. D. Falgout, T. V. Koley, and U. M. Yang, “Scaling hypre’s multigrid solvers to 100,000 cores,” in *High-Performance Scientific Computing*, pp. 261–279, Springer, 2012.
- [81] E. H. Müller and R. Scheichl, “Massively parallel solvers for elliptic partial differential equations in numerical weather and climate prediction,” *Quarterly Journal of the Royal Meteorological Society*, vol. 140, no. 685, pp. 2608–2624, 2014.

### **Declaration of interests**

☒ The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐ The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

|  |
|--|
|  |
|--|

### **Declaration of interests**

☒ The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐ The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

|  |
|--|
|  |
|--|

### **Credit Author Statement**

**A.M.D. Jost:** Methodology, Software, Validation, Formal Analysis, Investigation, Visualization, Writing – Original Draft, Writing – Review & Editing

**S. Glockner:** Conceptualization, Formal Analysis, Software, Writing – Original Draft, Writing – Review & Editing, Supervision, Project administration, Funding acquisition

## Highlights

- New ghost-cell immersed boundary methods that reduce the discretization stencil.
- The methods increase the accuracy of the solution and improve the convergence.
- Second-order convergence for Neumann immersed boundary condition can be achieved.
- Proposed methods lead to smaller total run times and smaller memory requirements.
- Combining these methods and quadratic interpolation yields more accurate results.