



HAL
open science

Multi-response optimization of drying process parameters for *Laurus Nobilis*

Ahlem Soltani, Soufien Azzouz, Mohamed A El Cafsi, Daniel Goujot, Hédi Romdhana

► **To cite this version:**

Ahlem Soltani, Soufien Azzouz, Mohamed A El Cafsi, Daniel Goujot, Hédi Romdhana. Multi-response optimization of drying process parameters for *Laurus Nobilis*. *Journal of Applied Research on Medicinal and Aromatic Plants*, 2021, 22, pp.100302. 10.1016/j.jarmap.2021.100302 . hal-03320719

HAL Id: hal-03320719

<https://hal.inrae.fr/hal-03320719>

Submitted on 17 Jan 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - NoDerivatives 4.0 International License

Estimation of the mass diffusion and heat/mass transfer coefficients in bay leaves by using the inverse approach

Ahlem SOLTANI^a, Hédi ROMDHANNA^{b, c}, Daniel GOUJOT^{b, c}, Soufien AZZOUZ^a, Mohamed Afif ELCAFSI^a

^a Sciences Faculty of Tunis, Laboratory of Energy and Thermal and Mass Transfer (LETTM), University of Tunis El Manar, 2092 Tunis, Tunisia

^b AgroParisTech, UMR1145 Ingénierie Procédés Aliments, 1 Avenue Des Olympiades, F_91300, Massy, France.

^c INRA, UMR1145 Ingénierie Procédés Aliments, 1 Avenue Des Olympiades, F_91300, Massy, France.

Corresponding author: Ahlem SOLTANI

Tel: +33 6 58 17 04 87 / +216 28 01 69 10

E-mail: soltaniahlem25@gmail.com

Abstract

The thermal and mass transfer parameters are essential to predict the drying kinetics. Unfortunately, these properties are often unavailable in the literature, especially for food products. This work proposes a method for predicting transfer parameters based on the inverse modeling approach. The parameters to be optimized are the external transfer coefficients as well as the moisture diffusivity. The optimization problem consists to minimize the difference between predicted and measured drying kinetics. This study includes modeling and experimental works to predict and measure the drying kinetics. In this study, we are interested in convective drying with hot air and we have used laurel leaves as an example of a product. The predictive model includes coupled phenomena of heat and mass transfers. The experimental tests are carried out in a flow-through drying cell with monitoring of the water loss for different drying conditions (velocity, temperature, and relative humidity).

Thanks to the inverse modeling approach, three parameters are predicted: convective heat and mass transfer coefficients, and the moisture diffusivity. Thereafter, the obtained heat transfer values and moisture diffusivity parameters were implemented on a predictive model to simulate a thin layer of bay leaves for different drying air conditions. The direct model is validated on a set of various thin-layer drying kinetics.

Keywords

Air drying; inverse modelling; heat and mass transfer; Finite volume method; Parameter estimation;

Nomenclature

| | |
|------------------------------|-------------|
| Roman capital letters | |
| Bi | Biot number |

| | |
|----------------------------|--|
| C | Concentration of water vapor in air (kg/m ³) |
| CV | Control volume |
| C _p | Specific heat capacity (J/kg/K) |
| D | Effective moisture diffusivity (m ² /s) |
| D _a | Moisture diffusivity coefficient in the boundary layer (m ² /s) |
| M | Molar mass of water (18g/mol) |
| N | Number of control volumes |
| Nu | Nusselt number (-) |
| L | Width of the leave (m) |
| Le | Lewis number (-) |
| ODE | Ordinary differential equation |
| OF | Objective function (-) |
| P _v | Partial pressure of water vapor (Pa) |
| P_v^{sat} | Saturated pressure of water vapor (Pa) |
| Re | Reynolds number (-) |
| R _G | Gas constant (8.314 J/mol/K) |
| RH | Relative humidity of air (decimal) |
| S | Surface area of the solid (m ²) |
| T | Temperature (°C) |
| T _{réf} | Reference temperature (°C) |
| T ₀ | Initial temperature (°C) |
| V | Volume of the solid (m ³) |
| V _a | Air velocity (m/s) |
| X | Moisture content (kg water/kg dm) |
| Roman small letters | |
| a _w | Water activity (-) |
| dz | Infinitesimal thickness increment (m) |
| e | Thickness of the product (m) |
| h | Convection heat transfer coefficient (W/m ² /K) |
| i | i-th elementary volume |

| | |
|----------------------|--|
| k_m | Convection mass transfer coefficient (m/s) |
| \dot{m} | Mass flux density at surface kg/s/m ² |
| n | Number of data points |
| p_i | Constant coefficients of effective moisture diffusivity equation (-) |
| t | Drying time (s) |
| u | Internal energy (J/m ³) |
| z | distance from the center (m) |
| Greek letters | |
| α | Thermal diffusivity (m ² /s) |
| ΔH_v | Latent heat of water vaporization (J/kg) |
| Δz | Thickness of a compartment/volume (m) |
| λ | Thermal conductivity (W/m/K) |
| μ | Dynamic viscosity of air (kg/m/s) |
| ρ | Density (kg/m ³) |
| Subscripts | |
| a | Dry air |
| cal | calculated |
| dm | Dry matter |
| e | Eastside face of the CV |
| eq | Equilibrium, at end of drying |
| est | estimated |
| h | Heat transfer |
| i | Initial |
| m | Mass transfer |
| ∞ | Relative to the drying air |
| v | water vapor |
| w | Westside face of the CV |

1. Introduction

Hot air drying is one of the most common drying techniques used to remove moisture from agro-industrial and food products for preservation purposes and to produce quality material (Mujumdar, 2004).

During this process, numerous important modifications take place in the product such as biological, physicochemical, and structural changes that affect the final material quality. The drying mechanism is considered as a process of coupled energy and mass transfer occurring inside the product and at the boundary with drying air, and is affected by numerous parameters, such as the drying air conditions and the properties of the material. To better predict the drying behavior of the product, it is necessary to understand the physical mechanism governing the drying operation. Unfortunately some thermophysical properties are difficult to determine experimentally (e.g. moisture diffusion).

Drying is often considered very energy-consuming. Understanding and predicting thermal and mass transfer phenomena is essential to simulate and improve energy efficiency (Romdhana et al, 2016; Chriyat et al, 2017). Understanding and predicting the phenomena induced on the product to be dried is essential for controlling the product in its form, structure, taste, nutritional quality (Kumar et al, 2012; Aversa et al., 2007). Numerous studies on mathematical drying models available in the literature are divided into two principal categories: empirical and physical models.

On one hand, the empirical models are easiest to use, because the experimental drying data can be solved by regression analysis using a simple fit model such as logarithmic, exponential and quadratic function. Numerous works on empirical models have been published for different agro-industrial and food materials: for Jujube (Chen et al, 2015), rosemary leaves (Mghazli et al, 2017), bay laurel leaves (Ghnimi et al, 2016), apple pomace (Wang et al, 2007), etc. On this topic, various applications for these models have highlighted that they are only specific to the conditions and product under which it is applied (Erbay and Icier, 2010; Onwude et al., 2016c). Therefore, these models are not able to provide a physical description of the drying process because they are not based on the fundamental physical laws governing the mechanism of energy and mass transport inside the product (Ertekin and Firat, 2017; Chou et al, 2000).

On the other hand, the physical models are based on numerical solutions of mass and heat transport equations. The simulation of moisture and temperature distribution is based on scientific knowledge on the physical mechanisms governing the drying phenomena and explains how the operating conditions have effects on product properties. Unlike empirical models, the physical model can be used for a wide range of applications and drying conditions (Kumar et al, 2012; Lambert et al, 2015; Xanthopoulos et al, 2009). Physical models of drying can be developed in different ways. The first approach is a diffusive model for which only moisture content and temperature are determined and the diffusion coefficient is considered global (apparent) because vapor and liquid phases are not separated (Golestani et al, 2013;Kokolj et al.,

2017; Sadeghi et al., 2016; Tank et al., 2014). The second approach is a multiphasic model with liquid and vapor phases; for each phase, a diffusion coefficient is determined, the mass conservation is considered; the gas pressure can be also considered (Dissa et al, 2014; Nicolas et al., 2014; Purlis, 2019).

Models based on global (apparent) diffusion are classified into two types, namely conjugate and non-conjugate problems. Transfers in conjugate models can be governed by two coupled unsteady transfer equations, one for the surrounding fluid and the other for the product being dried (De Bonis et al., 2008; Lamnatou et al., 2009, 2010; Halder et al., 2012). These models have a high accurate quantification that can conduct to enhance the characterization and comprehension of the drying process, but the complexity of the non-linear partial differential equations makes the numerical solution complicated and computational very required. Non-conjugate models can be described by the heat and mass transport inside the material, not taking into account unsteady transport equations in the surrounding air,. In literature, numerous works studied the convective drying process of agricultural materials using non-conjugated physical models for its simplicity and reliability (Ateeque et al, 2014; Lemus-Mondaca et al, 2014; Villa-Corrales et al. 2010, Barati et al, 2011; 2012). In these approaches, knowledge of moisture transfert and heat/mass transfer coefficients at interface is required as input to the model and these cannot still be readily available because of their space, time, moisture and temperature-dependent variables.

Moisture diffusivity is the main variable in governing the diffusion of mass through the product during drying. It describes all possible processes of mass movement inside the material that is a mixture of surface diffusion, liquid diffusion, vapor diffusion, hydrodynamic flow and capillary flow (Kim and Bhowmik, 1995). Knowledge of this parameter is essential in moisture transfer processes modeling. Literature data of the latter parameter are not easily available on account of its variability upon numerous variables, such as moisture content, temperature, shrinkage, porosity and drying conditions. Hence, the analysis of the moisture transfer mechanism is dependent on the assumptions which are taken into account for the determination of the effective moisture diffusivity. According to literature data results, effective moisture diffusivity can be expressed as a function of one or several variables such as drying conditions and product properties (Zogzas et al, 1994). Numerous studies have investigated the impact of material temperature and moisture content on the effective moisture diffusivity coefficient. Silva et al, (2011) studied effective moisture diffusivity that was either constant or variable, in banana drying. They proved that the variability of the moisture diffusivity as a function of sample moisture content is more precise in predicting the drying kinetic than the constant moisture diffusivity. Most authors (Batista et al, 2007; Touil et al, 2014; Karim and

Hawladar, 2005) investigated that moisture diffusivity is expressed in term of moisture content, whereas others (Silva et al, 2013) found it as product temperature-dependent. Variation of the diffusivity coefficient depends on the product temperature and moisture content during drying. Silva et al, 2014; Chandra and Talukdar, (2010) proposed that the variation of the diffusivity coefficient depends on the product temperature and moisture content ($D=f(T, X)$) during drying. This latter assumption was confirmed by a comparison of drying kinetics with that predicted. Kumar et al. (2015) studied the impact of effective diffusivity as a function of moisture content (MDED), effective diffusivity as a function of product temperature (TDED), and their average on the drying kinetics of banana. They found that the first approach was more suitable to the final stage of drying and the second approach was more suitable to the initial stage of drying. Khan et al (2016) proposed a diffusion-based model considering both approaches of effective diffusivity for various fruits and vegetables. By comparing the simulation results with the experimental results, they concluded that the effective diffusivity depending on moisture content (Moisture Dependent Effective Diffusivity, MDED) is more precise for predicting kinetics in food drying than the effective diffusivity depending on product temperature (Temperature Dependent Effective Diffusivity, TDED).

Certain methods in the literature that estimate moisture diffusivity are based essentially on Fick's laws. Besides, the main methods to estimate moisture diffusivity (Zogzas et al., 1994) are explicit solutions to the mass transfer equation, analytical solutions, and numerical solutions.

On one hand, the analytical solution has been extensively used in food for estimation of effective diffusivity for various geometries, however under hypothesis like uniform initial moisture content, negligible shrinkage and external resistance, constant diffusivity and isothermal drying (Chen and Putranto, 2013).

On the other hand, the numerical solution has the potential to evaluate the moisture diffusivity. Generally, the moisture diffusivity as a function of product temperature or/and moisture content or other sample properties being integrated into the numerical model. The moisture diffusivity function is determined by fitting the simulation data to the experimental data, and by selecting values for function parameters that make a better fit. To find desired parameters, it is necessary to define an objective function (OF) which is the difference between computed and observed values. Fabbri et al. (2014) proposed an identification based on finite element models to identify the moisture diffusivity during the hydration process in various food products such as biscuit, salami and flatbread. To estimate the diffusivity of chicory root cubes, Balzarini et al. (2018) described the heat and mass transport during drying with identification based on a finite element

model. The moisture diffusivity was introduced in the model as a function of product temperature and moisture content. [Lambert et al \(2015\)](#) identified the effective moisture diffusivity for pellets on deep-layer drying kinetics, and validated it over a set of thin-layer drying kinetics. They found out that a mismatch between experimental and simulation data at the beginning of the kinetics can be explained from a wrong convective heat transfer coefficient. So, to correct this mismatch, it was essential to estimate the heat and mass transfer coefficient.

The models in this study are non-conjugate heat and mass transfer models. To resolve the heat equation and the equation of mass diffusion at the interface between air and product, convective transfer coefficients (CTC) were introduced as additional parameters at the boundary condition (air-product interface). So, the heat/mass transfer coefficients are required as input variables to the computation and these cannot be readily determined. In the literature, various approaches have been considered for the determination of the CTC such as: (i) Constant values or empirical correlations for simplified flow configurations such as flow around plates, and cylinders ([Oztop et al.2008](#); [Aversa et al. 2007](#)), (ii) time-dependent coefficients based on a zero-dimensional heat and mass balance ([Lemus- Mondaca et al. 2013](#);[Villa-Corrales et al. 2010](#)), (iii) optimization and regression analysis of experimental and numerical data, ([Maroulis et al., 1995](#); [Da Silva et al., 2014](#)) and (iv) flow field simulations using computational fluid dynamics (CFD) ([Kaya et al.2008](#); [Esfahani et al. 2014](#)). So far, no publications studies are identifying the heat/mass transfer coefficients and the effective moisture diffusivity as a function of product temperature and moisture content for bay leaves according to experiments. It was therefore considered to be worthwhile to estimate both thermophysical properties at the same time.

The main goal of this study is therefore to determine heat/mass transfer coefficients and the effective moisture diffusivity for predicting the drying kinetics for bay leaves by using a finite element model. This work includes four steps: (i) Experimental determination at the lab-scale of bay leaf properties and drying kinetics at constant conditions, (ii) Development of a non-conjugate model describing the heat and mass transfer mechanisms during drying of bay leaves with effective moisture diffusivity depending on temperature and moisture content and with evaporation rate as an additional term at the air product interface, (iii) Estimate the heat/mass transfer coefficients and effective moisture diffusivity for the product, reducing the differences between simulation results and experimental data and (iv) Comparison of the numerical results of mean moisture content versus time with the observation data over all thin-layer drying kinetics for

validation purposes, to understand the influence of the moisture diffusion and the external heat and mass transfer on the drying process.

2. Material and Methods

2.1 Sample preparation and drying experiments

Fresh bay leaves used in the drying experiments were collected during the autumn months, from the same tree in a local protected botanical (Mornag-Tunisia) and brought immediately to the laboratory. The samples were washed and kept in a refrigerator at 4°C until the drying trials. The drying process was performed at the laboratory scale using a vertical drying tunnel developed by the Laboratory for Energy, Heat and Mass Transfer (LETTM) at the Tunis Faculty of Sciences (Tunisia). This dryer includes a programmable control system to adjust drying air parameters at given setpoints. The overall layout of the drying tunnel is shown in [Figure 1](#) ([Hassini et al, 2007](#); [Azzouz et al, 2016](#)). Once the air drier was at a stable state, the product was placed in the drying chamber. For each experiment, a mass of 50.0 ± 0.1 g of fresh leaves was distributed uniformly over a stainless steel grid in a thin layer of about 3 cm. The grid loaded with the leaves was suspended on a digital balance. The convective drying experiment was based on a three factor face-centered central composite design (FCCCD) consisting of drying temperature (40-70°C), relative humidity (15-35%) and air velocity (1-3 m/s), with three levels for each parameter, as summarized in [Table 1](#). These ranges were chosen because it is known that they are large enough to contain conditions without an excessive effect on product quality ([Yagcioglu et al., 1999](#); [Demir et al., 2004](#); [Skrubis, 1982](#)). The mass of the product was weighed during the experiment using a digital balance with a range of 5 kg and accurate to 1 g, placed outside the drying chamber and recorded using a data logger. Drying experiments were pursued until the moisture content of the sample reached the equilibrium state, which was observed when two or three consecutive weighings did not indicate any significant variations or changes in value. Temperature, relative humidity and air velocity inside the pilot drying system were adjusted and controlled automatically. The measurement sensors and data recording and control system were coupled to a computer.

2.2 Model for heat and mass transfer

A physical model has been developed for a thin-layer of bay leaves during convective drying. This model is based on mass and energy conservation. To simplify the model, a number of assumptions are considered:

- The initial moisture content and temperature inside the laurel leaves samples are uniform.
- The water evaporation takes place only at the interface of the product.

- Thermophysical properties of the product are uniform and isotropic
- Shrinkage and chemical reactions are negligible.
- The mass and heat transfer are assumed unidirectional (through the thickness of the leave)

A first estimate of the thermal Biot number suggests that the resistance to thermal transfer in the bay leaf is negligible compared to the resistance in the boundary layer. Indeed the thermal Biot (Eq.1) is in a range of about 0.02 to 0.5 if we consider a thickness of ~2 mm, a thermal conductivity between 0.2 and 0.5 W/m/K (Jayalakshmy and Philip, 2010) and a heat transfer coefficient between 5 and 50 W/m²/K. To simplify the problem, it make sense to consider only the resistance to heat transfer in the boundary layer. This rapid dimensional analysis is difficult to apply for the mass transfer (Eq.2) since the internal diffusion coefficient (diffusivity) and external one (convective mass transfer coefficient) are unknown. So no simplification will be considered for mass transfer. The resistance to external and internal transfers are taken into account in the model.

$$Bi_h = \frac{h e}{\lambda}$$

(1)

$$Bi_m = \frac{k_m e}{D}$$

(2)

2.2.1 Mass conservation equation:

The variation of local moisture content is obtained by combining Fick's law with the microscopic mass balance in an infinitesimal control volume:

$$\frac{\partial X}{\partial t} = \nabla (D(X,T) \nabla X)$$

(3)

Assuming Cartesian symmetry, the differential equation for moisture transfer in Cartesian coordinate system becomes:

$$\frac{\partial X}{\partial t} = \frac{\partial}{\partial z} (D(X,T) \frac{\partial X}{\partial z})$$

(4)

2.2.2 Energy conservation equation

By neglecting resistance to internal heat transfer, the variation of internal energy is due to the supply of external energy by convection and by the moisture release in the form of water vapor.

$$V \cdot \frac{\partial u}{\partial t} = S \cdot h(T_{\infty} - T) - \dot{m} \cdot S \cdot (\Delta H_v - C_p v T)$$

(5)

By neglecting the shrinkage, the sensible internal energy u can be expressed as:

$$u = \rho C_p (T - T_{ref}) = \rho_{dm} (C_{p_{dm}} + X C_{p_w}) (T - T_{ref}) \quad (6)$$

2.2.3 Boundary and initial conditions:

At the beginning of the process ($t=0$), the moisture content and the product temperature are uniform: $X=X_0$ and $T=T_0$.

At open boundary (i.e interface between the product surface and the drying aid):

$$\left(\frac{\partial X}{\partial z} \right)_{z=e/2} = \dot{m} \quad (7)$$

At the center of the product:

$$\left(\frac{\partial X}{\partial z} \right)_{z=0} = 0 \quad (8)$$

The evaporation rate is expressed as function of the concentration of water vapor difference between the product surface and the drying air, and the mass transfer coefficient k_m (Mihoubi and Bellagi, 2009; Romdhana et al., 2015).

$$\dot{m} = k_m (C_{z=e/2} - C_{z=\infty})$$

(9)

By assuming ideal gas behavior for the gaseous phase, the concentration of water vapor close to the product surface and the concentration of water vapor within the drying medium are expressed respectively by Eqs.

(10-11):

$$C_{z=e/2} = \frac{M P_{v,z=e/2}}{R_G P_{v,z=e/2}^{sat} T_{z=e/2}} = a_w \frac{P_{v,z=e/2}^{sat}}{T_{z=e/2}}$$

(10)

$$C_{z=\infty} = \frac{M P_{v,\infty}}{R_G P_{v,\infty}^{sat} T_{\infty}} = RH \frac{P_{v,\infty}^{sat}}{T_{\infty}}$$

(11)

Finally, the evaporation rate can be expressed as:

$$\dot{m} = k_m \frac{M}{R_G} \left(a_w \frac{P_{v,z=\frac{e}{2}}^{sat}}{T_{z=\frac{e}{2}}} - RH \frac{P_{v,\infty}^{sat}}{T_\infty} \right)$$

(12)

2.3 Sorption isotherm measurement

Attention cette section ne présente pas une procédure de mesure, donc l'intitulé ne convient pas # **Sorption isotherm measurement** #

Tu dois absolument décrire ces mesures (avec la méthode des sels saturés) dans la section matériel et méthode

Il est préférable d'insérer un tableau avec les données brutes

Et ensuite tu peux parler du modèle empirique choisi

Desorption isotherms of bay leaves were performed using the gravimetric static method at three levels of temperature (50°C, 60°C and 70°C) and desorption cycle of water activity a_w was ranged from 0.5 to 0.88. Equilibrium moisture content (X_e), temperature and water activity (a_w) data were fitted according to four equations: Modified Henderson (Shigehisa, 2015), Karlsson Soininen (Karlsson and Soininen, 1982), Chung and Pfof (Chung and Pfof, 1967), Henderson (Henderson, 1952). The Karlsson Soininen equation was the best fitting of desorption isotherms with higher coefficient correlation $R^2=0,98$.

$$a_w = \exp \left(T \cdot \exp \left(-8.87 \cdot X_e - 11.79 \cdot \sqrt{X_e} + 0.37 \right) - \exp \left(-0.21 \cdot X_e - 1.49 \cdot \sqrt{X_e} + 5.12 \right) \right) \quad (13)$$

Where X_e is the equilibrium moisture content (kg water/kg.d.m), a_w is the water activity (-), and T is the product temperature (°C).

2.4 Estimation of effective moisture diffusivity and heat and mass Transfer Coefficient

In heat and mass transfer simulation, it is necessary to supply all thermophysical properties and parameters of drying air and product. Some product characteristics and properties are determined experimentally or from value published in literature such as (thickness, density, water activity, water content, etc.). Other physical properties are not readily available (effective moisture diffusivity, external coefficient of heat and mass transfer coefficients) because they depend on numerous parameters such as drying air conditions, water activity, water content and temperature product. The effective moisture diffusivity and the heat transfer coefficient of the sample are estimated by the reverse method by fitting a set of experimental kinetics data obtained in a thin layer and under various conditions of drying air: temperature is between 40 to 70°C, air relative humidity is between 15 to 35 % and air velocity is between 1 to 3 m/s. In this work, the equation of effective moisture diffusivity is a function of the product temperature and of the moisture content (Zogzas et al., 1996; Romdhana et al., 2015):

$$D(X, T_p) = p_0 \cdot \exp(-p_1 \cdot X + p_2 \cdot X \cdot T_p) \exp\left(\frac{-p_3}{T_p}\right)$$

(14)

Where p_0, p_1, p_2 and p_3 are constants.

The mass and heat transfer coefficients were related by the Chilton- Colburn analogy (Chilton & Colburn, 1934; Cengel and Ghajar 2011; Pasban et al., 2017). Thus, the mass transfer coefficient can be expressed by:

$$k_m = \frac{h}{\rho_a C_{pa} (Le)^{2/3}}$$

(15) Where Lewis number (Le) was defined as:

$$Le = \frac{\alpha_a}{D_a}$$

(16)

2.5 Heat transfer Calculation:

The empirical model of convective heat transfer coefficient in the surface of a product is based on a correlation Nusselt that is typically expressed as a function of Reynolds and Prandtl numbers in the laminar flow over sample plates (Karim and Hawlader., 2005; Golestani et al., 2013), were given in Eq.17:

$$Nu = 0.664 Re^{0.5} Pr^{0.33}$$

(17)

The Nusselt (Nu), Reynolds (Re) and Prandtl (Pr) numbers were expressed as:

$$Nu = \frac{h_h L}{\lambda_a}$$

(18)

$$Re = \frac{V_a L \rho_a}{\mu_a}$$

(19)

$$Pr = \frac{\mu_a C_{pa}}{\lambda_a}$$

(20)

2.6 Finite volume method:

To solve the previous partial differential equations (PDE) describing the heat and mass transfer in the drying process of a flat particle, it is useful to mesh the continuous computation area. Finite differences, finite elements and finite volumes are widely used as discretization methods. In this work, the finite volume method (FVM) is used to solve numerically the problem of heat and mass transfer. This approach is useful

for complex geometries (Webley and He, 2000). The 1D continuous domain is split into N finite control volumes CV_i with N-2 compartments of constant mesh sizes Δz and two boundary compartments (center and boundary layer) of mesh sizes $\Delta z/2$. The Eqs. 4 and 5 are integrated over each cell of the mesh. Each control volume has an east and a west (subscripts e and w) interfaces and a control volume center, are shown in Figure 2.

The finite interval Δz is defined as:

$$\Delta z = \frac{e}{2(N-1)}$$

(21)

For i between 1 and N, each CV_i is identified by its representative size defined as:

$$z_{ci} = (i-1)\Delta z \tag{22}$$

The interfaces of control volume (CV_i) are then:

$$z_{i,w} = z_{ci} - \frac{\Delta z}{2} \tag{23}$$

$$z_{i,e} = z_{ci} + \frac{\Delta z}{2}$$

(24)

The integral form of the mass conservation equation is discretized into N volume integrals in the physical space to obtain the following expressions:

$$\int_{z_{i,w}}^{z_{i,e}} \frac{\partial X}{\partial t} S dz = \int_{z_{i,w}}^{z_{i,e}} \frac{\partial}{\partial z} \left(D \frac{\partial X}{\partial z} \right) S dz$$

(25)

Il n'y a pas de dérivée spatiale de l'équation 5 donc ne nécessite pas une discrétisation par la méthode des volumes finis

$$\int ()$$

To simplify the problem, the moisture content is assumed uniform in a control volume (CV_i) and the internal energy is considered uniform in the global continuous domain, Eqs.25 and 26 become:

$$\frac{\partial X_i}{\partial t} = \frac{1}{z_{i,e} - z_{i,w}} \left[D_i \frac{\partial X_i}{\partial z} \right]_v$$

(27)

[()]A linear approximation of the mass flux is applied to determine the moisture content gradient at the interfaces of each CV_i, as follows:

$$\left. \frac{\partial X_i}{\partial z} \right| = \frac{X_{i+1} - X_i}{\Delta z}$$

(29)

$$\left. \frac{\partial X_i}{\partial z} \right| = \frac{X_i - X_{i-1}}{\Delta z}$$

(30)

Then, the moisture diffusivity at west and east interfaces are calculated by using a geometric mean between nodal points:

$$D_{i,w} = (D_{i-1}D_i)^{1/2}$$

(31)

$$D_{i,e} = (D_{i+1}D_i)^{1/2}$$

(32)

A system of N+1 first-order differential equations (ODEs) is obtained by substituting Eqs. 29 and 30 into Eq. 27 and using the initial and boundary conditions, as:

For i=1:

$$\frac{\partial X_1}{\partial t} = \frac{1}{\Delta z^2} D_{1,e} (X_2 - X_1)$$

(33)

For i=2.....N-1:

$$\frac{\partial X_i}{\partial t} = \frac{1}{z_{i,e} - z_{i,w}} (D_{i,e} \frac{X_{i+1} - X_i}{\Delta z} - D_{i,w} \frac{X_i - X_{i-1}}{\Delta z})$$

For i=N

Cette equation est fausse!!!! À vérifier

$$\frac{\partial u}{\partial t} = \frac{1}{(\frac{e}{2})} (h(T_\infty - T) - m(\Delta H_v + C_p T))$$

J'ai barré l'indice N de la temperature, car il n'a pas de sens puisque la temperature est uniforme, et moi j'ai mis Tp avec p comme product.

2.6 Numerical and optimization strategies:

These sets of ordinary differential equations (stiff systems) were solved in MATLAB® software at each node using ode15s solver that is a method based on backward differentiation formulas for stiff problems (Matlab program). At each step, the local error in the ith component of the solution was

determined with the relative and absolute error tolerances according to [Table 2](#). Therefore, the subroutine ‘fminsearch’ was used to estimate the moisture diffusivity parameters and the heat transfer coefficient. This latter function applies the Nelder–Mead simplex method to minimize the objective function (OF) value. The OF [Eq. \(34\)](#) is defined as the sum of the square of the errors between the simulated and experimental moisture content data. These parameters, once estimated, were employed to solve the model equations and determine moisture content fields in the drying particle.

$$OF = \sum_{i=1}^n (X_{\text{exp}} - X_{\text{sim}})^2 \quad (34)$$

Where n is the number of data points, X_{exp} is the experimental moisture content (kg water/kg.dm) and X_{sim} is the simulated moisture content (kg water/kg.dm).

3. Results and discussion


3.1 Estimation of moisture diffusivity coefficient

On dit qu'on calcule h à partir de la corrélation 17

et on estime D par la méthode inverse

je pense que l'estimation de h fragilise ce travail (car le tab 3 est un peu troublant)

The heat transfer coefficient by convection is estimated from correlation 17. The obtained values vary between 15, ~21 and 27 W/m²/K, respectively for air velocity values of 1, 2 and 3 m/s. For each velocity value the number of Pr varies very slightly (0.7 ~ 0.9). However, there is a net variation in the transfer coefficient as a function of the air flow around the sheet to be dried.

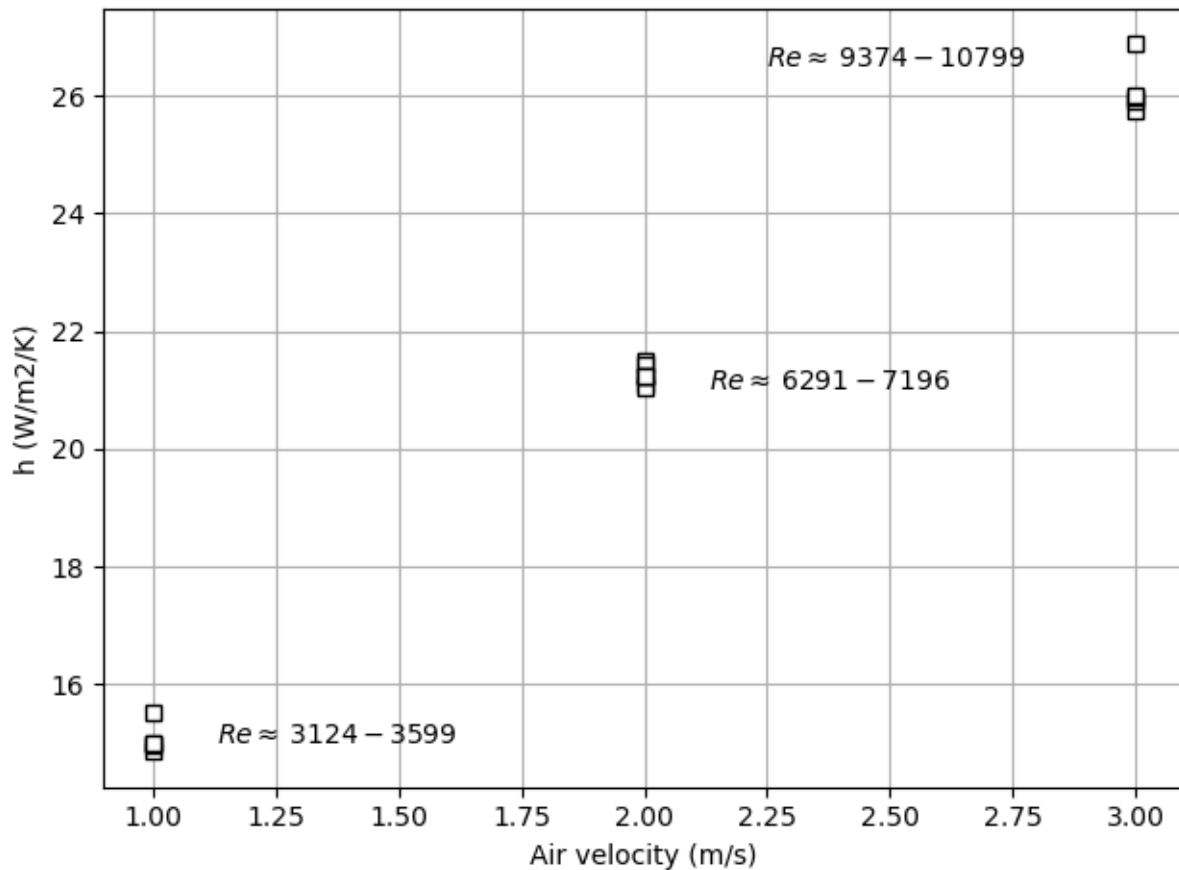

Figure? Calculation of heat transfer coefficient by convection ($Pr=0.73$ to 0.97)

These findings are in the range of those reported in literature for various products and drying conditions by optimization such as acai berry waste (fruit stone) from $47.78 \text{ W/m}^2/\text{C}$ at 42°C to 42.55 to $57 \text{ W/m}^2/\text{C}$ (Nagata et al. 2020), slice of potato, apple and carrot from 25 to $90 \text{ W/m}^2/\text{C}$ for air velocity range of 1 – 5 m/s and an air temperature range of 40 – 60°C under forced convection (Ratti and Crapiste. 1995), products with cylindrical shape from $15.2 \text{ W/m}^2/\text{K}$ at 47.9°C to 28.3 at 66.9°C (Silva et al. 2014) and others. Inspection of Table 3 indicates that the values of h_{est} are affected by the various drying air conditions. It can be noticed that the values of h_{est} increases with the rise in the air velocity and in the air temperature, since the higher in air velocity and air temperature raises the drying potential for the mass transfer and hence the drying rate. In contrast, the heat transfer coefficient diminishes with the rise in air relative humidity, because the greater in the latter parameter decelerate the drying capacity for the transport of moisture. The calculated heat transfer coefficient (h_{cal}) based on Nusselt correlation values ranged between 14.2 and $25.6 \text{ W/m}^2/\text{K}$ under various conditions (Table 3). It is seen that the h_{cal} is not sensitive to the variation in air temperature and in air relative humidity and in the physical properties of fluid. Comparing these findings with those estimated according to the inverse method, it is observed a wide variation between the both data. The reasons for this variation may be due to the dependence of h_{cal} only of air velocity, physical properties of air

(C_{pa} , ρ_a , λ_a and μ_a) and characteristics of the physical system, and does not take into account the non-regular product geometries, the operating conditions (T_a , RH_a) and transient characteristics of heat processes (Rahman and Kumar. 2006; Tolaba et al. 1988).

In this case, an exponential form of moisture diffusivity considering the moisture content and temperature dependence were tested. The initial moisture diffusivity parameters were selected on the base of those reported in literature (Zogzas et al., 1996; Romdhana et al, 2016). The identified global optimum values are:

$$D(X, T_p) = p_0 \cdot \exp(-p_1 \cdot X + p_2 \cdot X \cdot T_p) \exp\left(\frac{-p_3}{T_p}\right)$$

(33)

$$p_0 = 4.7496 \times 10^{-7} \mp 0.27 \times 10^{-7}$$

$$p_1 = 14.0918 \mp 0.0082$$

$$p_2 = 0.0482 \mp 0.0001$$

$$p_3 = 2.9133 \times 10^3 \mp 0,0166 \times 10^3$$

Thereafter, the moisture diffusivity parameters were implemented in the model on the base of the equation proposed beforehand. It is noted that the impact of the moisture content (parameter p_1) and of the temperature (parameter p_3) appears to be very important and the diffusivity tends to decrease with decreasing moisture content over time and with decreasing temperature. Moreover, the pre-exponential factor (p_0) seems to be very restricted. Similar results were reported also by (Lambert et al., 2015; He et al., 2019) who declared that the diffusivity follows the temperature and moisture content tend.

The values of moisture diffusivity coefficient calculated by Eq. (33) for bay leaf is ranged from 5.15×10^{-11} to $1.65 \times 10^{-9} \text{m}^2/\text{s}$. In this case, these values are comparable with the values of biological products between 10^{-11} and 10^{-9} (Saravacos and Maroulis, 2001; Panagiotou et al., 2004), disposable in the literature. Particularly, (Doymaz et al, 2011) and (Ghnimi et al, 2015) have determined moisture diffusivity coefficients by using the analytical solution of Fick's second law for bay leaf. The first author found values ranging from 9.38×10^{-12} to $2.07 \times 10^{-11} \text{m}^2/\text{s}$ in temperature ranging from 50 to 70°C and in constant air velocity 2 m/s, whilst for second author reported a variable value ranging from 1.21×10^{-10} to $5.27 \times 10^{-10} \text{m}^2/\text{s}$ in temperature varying from 45 to 70°C, in air relative humidity varying from 5 to 45% and at three air velocities 1, 1.5 and 2 m/s. Other authors were used the numerical solution of Fick's second law based on the inverse method to estimate the moisture diffusivity coefficient for others products such as Fabbri et al. (2014) reported a three moisture diffusivity values being 1.792×10^{-11} , 6.804×10^{-11} and $3.857 \times 10^{-12} \text{m}^2/\text{s}$ for flat bread, biscuits and salami respectively and Cevoli et al. (2020) mentioned a variable value from 2.61×10^{-10} ($T=25^\circ\text{C}$) to 7.95×10^{-8} ($T=178^\circ\text{C}$) m^2/s for cake baking.

The Biot numbers (Bi_h and Bi_m) are dimensionless quantities used to characterize controlling mechanisms in heat and mass transfer calculations. They are the ratio of the external and internal resistances to heat or mass flux. The knowledge of the both numbers during drying is very important to select an appropriate model. [Table 3](#) shows that the estimated heat transfer value is in a range of about 6 to 58.3 W/m²/K. Bi_m thermal Biot is less than 1. Several food products have a Bi_h less than one such as apple ([Golestani et al, 2013](#)) and wheat ([Giner et al., 2010](#)). The bay leaf is a poorly conductive ($\lambda_{max} \sim 0.5$) and it has a small thickness, so these product characteristics permitted to have a small value of a thermal Biot. In this condition, the thermal resistance at the surface of the product (convection resistance) exceeds the thermal resistance inside of the product (conductive resistance), this indicates that the temperature interior the material does not vary significantly in space (uniform temperature). This fact permitted to confirm the assumption which was used during the developed of the model "the internal conductive resistance can be neglected and it can be assumed that the product is isothermal". In accordance with the analogy between the transfer processes, the mass transfer Biot number (Bi_m) is an analogous dimensionless quantity to Bi_h and have the same role for mass transport as the thermal Biot number has for heat transport. [Table 3](#) shows that the Biot mass transfer is in a range of about 9.42×10^4 to 2.69×10^6 . It is noticed that the Bi_m is greater than one. This signifies that the "internal resistance to mass transfer" dominates the mass transfer process, and the "external resistance to mass transfer" can be neglected because it is small relative to the first term ([Parti, 1994](#)). The decrease in moisture content from the X_i to X_{eq} increased the mass transfer Biot number. In this study, it is also noticed that the mass transfer Biot number is much greater, however the thermal Biot number is very small. The mass transfer Biot number is six magnitudes greater than heat transfer. The disparities between the both numbers are the consequences of the relatively lower mass diffusivities in solid materials ([Zhang, 2013](#)).

3.2 Model validation

The developed physical model was validated by comparing the experimental data and model predictions. [Figures 3-7](#) displays the comparison of the measured values of moisture content with the predicted results. Mentioned figures shows that the present physical model can predict the temporal evolution of the mean moisture content with acceptable accuracy for a set of numerous thin layer drying kinetics under different drying conditions. This model takes into account the dependence on the air temperature, air relative humidity and air velocity, supplied an appropriate equation of effective moisture diffusivity [Eq. \(33\)](#) and estimated values of heat transfer coefficient ([Table 3](#)). The statistical indicators presented in [Table 3](#) are excellent to describe the mass and heat transfer. Particularly, the object function value for the trials is 0.8866

with a relative and absolute tolerance of 10^{-4} . It is illustrated that the experimental and simulation data are in good agreement. It can be also inferred that the simultaneous heat and mass transfer model taking into account the effective moisture diffusivity as a function of product temperature and moisture content, can adequately be employed to describe the drying kinetics of bay leaves during convective drying into the wide range of drying conditions. The mismatch observed between the simulated and experimental data, can be caused by the miss of taking into account the change of the product geometry and shape during drying and the variations of the food properties, in the present model simulations. The analysis of the transfer phenomena given here is based only on the study of the time evolution of average moisture content. [Figure 3](#) indicated that the repetition of drying kinetic for the center drying condition is found good repeatability with a difference not exceeding 6%. The results in [Figures 4-5](#) revealed that a larger quantity of water is removed in the higher air temperatures and velocities. This comportment is due to the reliance of the effective moisture diffusivity on temperature. It can be seen that an increase in differences temperature between air sample and stream corresponds to an increase in the heat flux to the inside of the sample and thus to higher moisture diffusivity. Furthermore, an increase in air velocity is coupled with an increase in heat transfer coefficient (Table 3), producing in turn to a higher temperature and thereby to an increased diffusivity and increased water removal. [Figure 6](#) shows that water removal is decreasing for increasing air relative humidity. Also, higher air relative humidity corresponds to a decrease in heat transfer coefficient (Table 3), accelerating in turn the decrease of temperature and thereby to the decrease of water removal. Finally, it can be inferred that both moisture content and temperature have an important influence on the evolution of diffusivity.

4. Conclusions

In this study, the physical model was developed based on a simultaneous heat and mass transfer to study the drying convective process of a thin layer of bay leaves. The heat transfer coefficient and the effective moisture diffusivity, as a function of moisture content and product temperature, were identified by inverse modeling approach. . When these estimated parameters were introduced in the direct numerical model simulating the thin layer of bay leaves, the minimum value of the distance between the simulated and experimental results was 0.8866. Moreover, the simulation results indicated a good agreement with the experimental data for a series of drying kinetics confirming that the physical model can be predicted the heat and mass transport phenomena during the drying. The benefits of the proposed reverse method are that the heat transfer coefficient may be identified and used and that the moisture diffusivity can be implemented as

a function of a desirable product property (temperature, shrinkage, moisture content...). Furthermore, this model is computationally efficient and thus it is for appropriate for optimizing the quality of the drying convective process.

Acknowledgments

The first author acknowledges the researchers Laboratory of Energy and Thermal and Mass Transfer (LETTM) and UMR1145 Ingénierie Procédés Aliments for their support and helpfulness.

Conflict of interest

The authors report no conflict of interest. The authors alone are responsible for the content and 333 writing of the paper.

References

- Ateeque, M.; Mishra, R.K.; Chandra Mohan, V.P.; Talukdar, P. Numerical modeling of convective drying of food with spatially dependent transfer coefficient in a turbulent flow field. *Int. J. Therm. Sci.* 2014, 78, 145–157. <https://doi.org/10.1016/j.ijthermalsci.2013.12.003>.
- Aversa, M.; Curcio, S.; Calabrò, V.; Iorio, G. An analysis of the transport phenomena occurring during food drying process. *J. Food Eng.* 2007, 78, 922–932. <https://doi.org/10.1016/j.jfoodeng.2005.12.005>.
- Azzouz, S.; Hermassi, I.; Toujani, M.; Belghith, A. Effect of drying temperature on the rheological characteristics of dried seedless grapes. *Food Bioprod. Process.* 2016, 100, 246–254. <https://doi.org/10.1016/j.fbp.2016.07.002>.
- Balzarini, M.F.; Reinheimer, M.A.; Ciappini, C.; Scienna, N.J. Mathematical model, validation and analysis of the drying treatment on quality attributes of chicory root cubes considering variable properties and shrinkage. *Food Bioprod. Process.* 2018, 111, 114–128. <https://doi.org/10.1016/j.fbp.2018.07.005>.
- Barati, E.; Esfahani, J.a. A new solution approach for simultaneous heat and mass transfer during convective drying of mango. *J. Food Eng.* 2011, 102 (4), 302–309. <https://doi.org/10.1016/j.jfoodeng.2010.09.003>.
- Barati, E.; Esfahani, J.A. Mathematical simulation of convective drying: Spatially distributed temperature and moisture in carrot slab. *Int. J. Therm. Sci.* 2012, 56, 86–94. <https://doi.org/10.1016/j.ijthermalsci.2012.01.003>.
- Batista, L.M.; da Rosa, C.A.; Pinto, L.A.A. Diffusive model with variable effective diffusivity considering shrinkage in thin layer drying of chitosan. *J. Food Eng.* 2007, 81(1), 127–132. <https://doi.org/10.1016/j.jfoodeng.2006.10.014>.

- Bird, R.B.; Stewart, W.E.; Lightfoot, E.N. *Transport Phenomena*. 2002, 2nd Ed, Wiley, New York.
- Cengel, Y.A. and Ghajar, A.J. *Heat and Mass Transfer: Fundamentals and Applications*. 2011.
- Chandra, M.V.P.; Talukdar, P. Three dimensional numerical modelling of simultaneous heat and moisture transfer in a moist object subjected to convective drying. *Int J Heat Mass Tran.* **2010**, *53*(21–22), 4638–4650. <https://doi.org/10.1016/j.ijheatmasstransfer.2010.06.029>.
- Chen, Q.; Bi, J.; Wu, X.; Yi, J.; Zhou, L.; Zhou, Y. Drying kinetics and quality attributes of jujube (*Zizyphus jujuba* Miller) slices dried by hot-air and short- and medium-wave infrared radiation. *LWT-Food Sci Technol.* 2015, *64* (2), 759-766. <https://doi.org/10.1016/j.lwt.2015.06.071>.
- Chen, S. S. and Spiro, M. Study of microwave extraction of essential oil constituents from plant materials. *J. of Microwave Power and Electromagnetic Energy.* 1994, *29*(4), 231-241.
- Chen, X.D.; Putranto, A. *Modelling Drying Processes: A Reaction Engineering Approach: A reaction engineering approach*. Cambridge UK: Cambridge University Press. 2013. <https://doi.org/10.1017/CBO9780511997846>.
- Chilton, T. H. and Colburn, A. P. Mass transfer (absorption) coefficients prediction from data on heat transfer and fluid friction. *Ind. Eng. Chem. Res.* **1934**, *26*, 1183-1187.
- Chou, S.K.; Chua, K.J.; Mujumdar, A.S.; Hawlader, M.N.A.; Ho, J.C. On the intermittent drying of an agricultural product. *Food and Bioproducts Processing.* 2000, *78*(4), 193–203. <https://doi.org/10.1205/09603080051065296>.
- Chriyat, Y.; Romdhana, H.; Esteban Decloux, M. Reducing Energy Requirement for Drying of Beet-Pulp: Simulation of Energy Integration Between Superheated Steam and Air Drying Systems. *Dry Technol.* 2017, *35*, 838-848. <https://doi.org/10.1080/07373937.2016.1220952>.
- Chung, D.S. and Pfoest, H.B. Adsorption and desorption of water vapour by cereal grains and their products, Part II. *Trans Am Soc Agric Eng (ASAE)*.1967, *10*(4),549–551.
- Da Silva, W.P.; Silva, C.M.D.P.S.; Gama, F.J.A.; e Silva, C.M.D.P.S. Estimation of thermo-physical properties of products with cylindrical shape during drying: the coupling between mass and heat. *J. Food Eng.* 2014, *141*, 65–73. <https://doi.org/10.1016/j.jfoodeng.2014.05.010>.
- De Bonis, M.V.; Ruocco, G. A generalized conjugate model for forced convection drying based on an evaporative kinetics. *J. Food Eng.* 2008, *89* (2), 232–240. <https://doi.org/10.1016/j.jfoodeng.2008.05.008>.

- Demir, V.; Gunhan, T.; Yagcioglu, A.K.; Degirmencioglu, A. Mathematical modelling and, the determination of some quality parameters of air-dried bay leaves. *Biosyst Eng.* 2004, 88 (4), 325–335. <https://doi.org/10.1016/j.biosystemseng.2004.04.005>.
- Dissa, A. O.; Compaore, A.; Tiendrebeogo, E.; Kouliadiati, J. An Effective Moisture Diffusivity Model Deduced from Experiment and Numerical Solution of Mass Transfer Equations for a Shrinkable Drying Slab of Microalgae *Spirulina*. *Dry Technol.* 2014, 32, 1231-1244.
- Erbay, Z.; Icier, F. A review of thin layer drying of foods: Theory, modeling, and experimental results. *Critical Reviews in Food Science and Nutrition.* 2010, 50(5), 441–464. <https://doi.org/10.1080/10408390802437063>.
- Ertekin, C.; Firat, M.Z. A comprehensive review of thin layer drying models used in agricultural products. *Crit. Rev. Food Sci. Nutr.* 2017, 57, 701-717. <https://doi.org/10.1080/10408398.2014.910493>.
- Esfahani, J.A.; Majdi, H.; Barati, E. Analytical two-dimensional analysis of the transport phenomena occurring during convective drying: apple slices. *J. Food Eng.* 2014, 123, 87–93. <https://doi.org/10.1016/j.jfoodeng.2013.09.019>.
- Fabbri, A.; Cevoli, C.; Troncoso, R. Moisture diffusivity coefficient estimation in solid food by inversion of a numerical model. *Food Res. Int.* 2014, 56, 63–67. <https://doi.org/10.1016/j.foodres.2013.12.002>.
- Ghnimi, T.; Hassini, L.; Bagane, M. Experimental study of water desorption isotherms and thin-layer convective drying kinetics of bay laurel leaves. *Heat Mass Transfer.* 2016, 52 (12), 2649-2659. <https://doi.org/10.1007/s00231-016-1770-0>.
- Giner, S. A.; Martín Torrez Irigoyen, R.; Cicuttín, S.; Fiorentini, C. The variable nature of Biot numbers in food drying. *J. Food Eng.* 2010, 101, 214–222. <https://doi.org/10.1016/j.jfoodeng.2010.07.005>.
- Golestani, R.; Raisi, A.; Aroujalian, A. Mathematical Modeling on Air Drying of Apples Considering Shrinkage and Variable Diffusion Coefficient. *Dry Technol.* 2013, 31, 40-51. <https://doi.org/10.1080/07373937.2012.714826>.
- Halder, A.; Datta, A.K. Surface heat and mass transfer coefficients for multiphase porous media transport models with rapid evaporation. *Food Bio prod. Process.* 2012, 90 (3), 475–490. <https://doi.org/10.1016/j.fbp.2011.10.005>.
- Hassini, L.; Azzouz, S.; Peczalski, R.; Belghith, A. Estimation of potato moisture diffusivity from convective drying kinetics with correction for shrinkage. *J. Food Eng.* 2007, 79, 47-56. <https://doi.org/10.1016/j.jfoodeng.2006.01.025>.

- He, Z.; Qian, J.; Qu, L.; Wang, Z., Yi, S. Simulation of moisture transfer during wood vacuum drying. *Results in Physics*. 2019, 12, 1299–1303. <https://doi.org/10.1016/j.rinp.2019.01.017>.
- Henderson S.M. A basic concept of equilibrium moisture content. *Agric Eng*. 1952, 33, 29–31.
- Jayalakshmy, M. S.; Philip, J. Thermophysical Properties of Plant Leaves and Their Influence on the Environment Temperature. *Int J Thermophys*. 2010, 31, 2295–2304. <https://doi.org/10.1007/s10765-010-0877-7>.
- Karim, M.A.; Hawlader, M.N.A. Mathematical modelling and experimental investigation of tropical fruits drying. *Int J Heat Mass Tran*. 2005, 48(23–24), 4914–4925. <https://doi.org/10.1016/j.ijheatmasstransfer.2005.04.035>.
- Karlsson, M and Soininen, M. The drying characteristics of a paper machine. In 3rd international drying symposium. 1982, 351–62.
- Kaya, A.; Aydin, O.; Dincer, I. Experimental and numerical investigation of heat and mass transfer during drying of Hayward kiwi fruits (*Actinidia Deliciosa* Planch). *J. Food Eng*. 2008, 88 (3), 323–330. <https://doi.org/10.1016/j.jfoodeng.2008.02.017>.
- Khan, M. I. H.; Kumar, C.; Joardder, M. U. H.; Karim, M. A. Determination of appropriate effective diffusivity for different food materials. *Dry technol*. 2016, vol 35, no 3, 335–346. <http://dx.doi.org/10.1080/07373937.2016.1170700>.
- Kim, S.S. and Bhowmik, S.R. Effective moisture diffusivity of plain yogurt undergoing microwave vacuum drying. *J. Food Eng*. 1995, 24: 137–148. [https://doi.org/10.1016/0260-8774\(94\)P1614-4](https://doi.org/10.1016/0260-8774(94)P1614-4).
- Kokolj, U.; Škerget, L.; Ravnik, J. A numerical model of the shortbread baking process in a forced convection oven. *Appl. Therm. Eng*. 2017, 111, 1304–1311. <https://doi.org/10.1016/j.applthermaleng.2016.10.031>.
- Kumar, C.; Karim, A.; Joardder, M.U.H.; Miller, G.J. Modeling heat and mass transfer process during convection drying of fruit. In 4th International Conference on Computational Methods, Gold Coast, Australia. 2012, November 25–28.
- Kumar, C.; Karim, A.; Saha, S.C.; Joardder, M.U.H.; Brown, R.J.; Biswas, D. Multiphysics modelling of convective drying of food materials. In Proceedings of the Global Engineering, Science and Technology Conference, Dhaka, Bangladesh. 2012, December 28–29.
- Kumar, C.; Millar, G. J.; Karim M. A. Effective Diffusivity and Evaporative Cooling in Convective Drying of Food Material. *Dry Technol*. 2015, 33, 227–237. <https://doi.org/10.1080/07373937.2014.947512>.

- Lambert, C.; Romdhana, H.; Courtois, F. Reverse methodology to identify moisture diffusivity during Air-Drying of Foodstuffs. *Dry Technol.* 2015, 33, 1076–1085. <https://doi.org/10.1080/07373937.2014.985792>.
- Lamnatou, C.; Papanicolaou, E.; Belessiotis, V.G.; Kyriakis, N. Finite-volume modelling of heat and mass transfer during convective drying of porous bodies – non-conjugate and conjugate formulations involving the aerodynamic effects. *Renew. Energy.* 2010, 35 (7), 1391–1402. <https://doi.org/10.1016/j.renene.2009.11.008>.
- Lemus-Mondaca, R.A.; Zambra, C.E.; Vega-Galvez, A.; Moraga, N.O. Coupled 3D heat and mass transfer model for numerical analysis of drying process in papaya slices. *J. Food Eng.* 2014, 116 (1), 109–117. <https://doi.org/10.1016/j.jfoodeng.2012.10.050>.
- Maroulis, Z.B.; Kiranoudis, C.T.; Marinos-Kouris, D. Heat and mass transfer modeling in air drying of foods. *J. Food Eng.* 1995, 26 (1), 113–130. [https://doi.org/10.1016/0260-8774\(94\)00040-G](https://doi.org/10.1016/0260-8774(94)00040-G).
- Mghazli, S.; Ouhammou M.; Hidar, N.; Lahnine, L.; Ildimam, A.; Mahrouz, M. Drying characteristics and kinetics solar drying of Moroccan rosemary leaves. *Renew. Energy.* 2017, 108, 303-310. <https://doi.org/10.1016/j.renene.2017.02.022>.
- Mihoubi, D and Bellagi, A. Drying-induced stresses during convective and combined microwave and convective drying of saturated porous media. *Dry Technol.* 2009, 27, 851–856.
- Mujumdar, A.S. Research and development in drying: Recent trends and future prospects. *Dry Technol.* 2004, 22(1–2), 1–26. <https://doi.org/10.1081/DRT-120028201>.
- Nagata, G. A.; Costa, T. V.; Perazzini, M. T. B.; Perazzini, H. Coupled heat and mass transfer modelling in convective drying of biomass at particle-level: Model validation with experimental data. *Renew. Energy.* 2020, 149, 1290-1299. <https://doi.org/10.1016/j.renene.2019.10.123>.
- Nicolas, V.; Salagnac, P.; Glouannec, P.; Ploteau, J.P.; Jury, V.; Boillereaux, L. Modelling heat and mass transfer in deformable porous media: application to bread baking. *J. Food Eng.* 2014, 130, 23–35. <https://doi.org/10.1016/j.jfoodeng.2014.01.014>.
- Onwude, D.I.; Hashim, N.; Janius, R.B.; Nawi, N.M.; Abdan, K. Modeling the thin-layer drying of fruits and vegetables: a review. *Compr. Rev. Food Sci. Food Saf.* 2016c, 15, 599-618. <https://doi.org/10.1111/1541-4337.12196>.

- Oztop, H.F.; Akpinar, E.K. Numerical and experimental analysis of moisture transfer for convective drying of some products. *Int. Commun. Heat Mass Transfer*. 2008, 35 (2), 169–177. <https://doi.org/10.1016/j.icheatmasstransfer.2007.06.005>.
- Panagiotou, N.M.; Krokida, M.K.; Maroulis, Z.B.; Saravacos, G.D. Moisture diffusivity: literature data compilation for foodstuffs. *Int. J. Food Prop.* 2004, 7, 273–299. <https://doi.org/10.1081/JFP-120030038>.
- Parti, M. Mass transfer Biot numbers. *Periodica polytechnic ser. Mech. Eng.* 1994, Vol 38, Nos. 2-9, PP. 109-122.
- Pasban, A.; Sadrnia, H.; Mohebbi, M.; Ahmad Shahidi, S. Spectral method for simulating 3D heat and mass transfer during drying of apple slices. *J. Food Eng.* 2017, 212, 201-212.
- Purlis, E. Modelling convective drying of foods: A multiphase porous media model considering heat of sorption. *J. Food Eng.* 2019 263,132–146. <https://doi.org/10.1016/j.jfoodeng.2019.05.028>.
- Rahman, N.; Kumar, S. Evaluation of convective heat transfer coefficient during drying of shrinking bodies. *Energy Convers. Manag.* 2006, 47, 2591–2601. <https://doi.org/10.1016/j.enconman.2005.10.025>.
- Ratti, C.; Crapiste, GH. Determination of heat transfer coefficients during drying of foodstuffs. *J Food Process Eng.* 1995,18:41–53. <https://doi.org/10.1111/j.1745-4530.1995.tb00353.x>.
- Romdhana, H.; Lambert, C.; Goujot, D.; Courtois, F. Model reduction technique for faster simulation of drying of spherical solid foods. *J. Food Eng.* 2015, 1-11. <https://doi.org/10.1016/j.jfoodeng.2015.09.021>.
- Romdhana, H.; Bonazzi, C.; Esteban Decloux, M. Computer aided process engineering for environmental efficiency: industrial drying of biomass, *Dry Technol.* 2016, 34, 1253-1269. <https://doi.org/10.1080/07373937.2015.1104348>.
- Sadeghi, F.; Hamdami, N.; Shahedi, M.; Rafe, A. Numerical modeling of heat and mass transfer during contact baking of flat bread. *Food Proc. Eng.* 2016, 39, 345–356. <https://doi.org/10.1111/jfpe.12227>.
- Saravacos, G.D.; Maroulis, Z.B. *Transport Properties of Foods*. 2001, Marcel Decker, New York.
- Shigehisa, T.; Inoue, T.; Kumagai, H. Mathematical model of water sorption isotherms of UBC. *Fuel Process Technol.* 2015,131, 133–41.
- Silva, W.P.; Silva, C.M.D.P.S.; Farias, V.S.O.; Gomes, J.P. Diffusion models to describe the drying process of peeled bananas: Optimization and simulation. *Dry Technol.* 2011, 30(2), 164–174. <https://doi.org/10.1080/07373937.2011.628554>.

- Silva, W.P.; Silva, C.M.D.P.S.; Gomes, J.P. Drying description of cylindrical pieces of bananas in different temperatures using diffusion models. *J. Food Eng.* 2013, 117(3), 417–424. <https://doi.org/10.1016/j.jfoodeng.2013.03.030>.
- Silva, W.P.; Hamawand, I.; Silva, C.M.D.P.S. A liquid diffusion model to describe drying of whole bananas using boundary-fitted coordinates. *J. Food Eng.* 2014, 137, 32–38. <https://doi.org/10.1016/j.jfoodeng.2014.03.029>.
- Silva, W.P.; Silva, C.M.D.P.S.; Gama F. J.A. Estimation of thermo-physical properties of products with cylindrical shape during drying: The coupling between mass and heat. *J. Food Eng.* 2014, 141(3), 65–73. <https://doi.org/10.1016/j.jfoodeng.2014.05.010>.
- Skrubis, B.G. The drying of bay leaves. *Perfumer and Flavorist.* 1982, 7, 37–40.
- Tank, A.; Chhanwal, N.; Indrani, D.; Anandharamakrishnan, C. Computational fluid dynamics modeling of bun baking process under different oven load conditions. *J. Food Sci. Technol.* 2014, 51, 2030–2037. <https://doi.org/10.1007/s13197-012-0736-6>.
- Tolaba, M.P.; Viollaz, P.E.; Suarez C. A mathematical model to predict the temperature of maize kernels during drying. *J Food Eng.* 1988, 8 (1),1–16. [https://doi.org/10.1016/0260-8774\(88\)90032-5](https://doi.org/10.1016/0260-8774(88)90032-5).
- Touil, A.; Chemkhi, S.; Zagrouba, F. Moisture diffusivity and shrinkage of fruit and cladode of *Opuntia ficusindica* during infrared drying. *J. Food Eng.* 2014, 1–9. <http://dx.doi.org/10.1155/2014/175402>.
- Versteeg, H.K.; Malalasekera, W. *An Introduction to Computational Fluid Dynamics: The Finite Volume Method.* Longman Scientific Technical Press, Addison Wesley Longman Ltd, London, UK. 1995.
- Villa-Corrales, L.; Flores-Prieto, J.J.; Xaman-Villasenor, J.P.; Garcia-Hernandez, E. Numerical and experimental analysis of heat and moisture transfer during drying of Ataulfo mango. *J. Food Eng.* 2010, 98 (2), 198–206. <https://doi.org/10.1016/j.jfoodeng.2009.12.026>
- Wang, Z.; Sun, J.; Liao, X.; Chen, F.; Zhao, G.; Wu, J.; Hu, X. Mathematical modeling on hot air drying of thin layer apple pomace. *Food Research International.* 2007, 40(1), 39–46. <https://doi.org/10.1016/j.foodres.2006.07.017>.
- Webley, P.A.; He, J. Fast solution-adaptive finite volume method for PSA/VSA cycle simulation; 1 single step simulation. *Comp. Chem. Eng.* 2000, 23 (11–12), 1701–1712.
- Xanthopoulos, G.; Yanniotis, S.; Lambrinos, Gr. Water Diffusivity and Drying Kinetics of Air Drying of Figs. *Dry Technol.*2009, 27,502–512. <https://doi.org/10.1080/07373930802686149>.

Yagcioglu, A.; Degirmencioglu, A.; Cagatay, F. Drying characteristics of bay leaves under different drying conditions. Proceedings of the 7th International Congress on Mechanization and Energy in Agriculture, pp. 1999, 565–569. Adana, Turkey, 26–27 May.

Zhang, L. Z. Chapter 1 - An Introduction to Conjugate Heat and Mass Transfer in Ducts. Conjugate Heat and Mass Transfer in Heat Mass Exchanger Ducts. 2013, 1-20. <https://doi.org/10.1016/B978-0-12-407782-9.00001-0>.

Zogzas, N.; Maroulis, Z.; Marinos-kouris, D. Moisture diffusivity data compilation in foodstuffs. Dry. Technol. 1996, 14, 2225-2253.

Tables:

Table 1. Convective drying conditions of the experiments (FCCCD)

| Run | Ta (°C) | RH (%) | Va (m/s) |
|-----------------|---------|--------|----------|
| 1 | 40 | 15 | 1 |
| 2 | 70 | 15 | 1 |
| 3 | 40 | 35 | 1 |
| 4 | 70 | 35 | 1 |
| 5 | 40 | 15 | 3 |
| 6 | 70 | 15 | 3 |
| 7 | 40 | 35 | 3 |
| 8 | 70 | 35 | 3 |
| 9 | 40 | 25 | 2 |
| 10 | 70 | 25 | 2 |
| 11 | 55 | 15 | 2 |
| 12 | 55 | 35 | 2 |
| 13 | 55 | 25 | 1 |
| 14 | 55 | 25 | 3 |
| 15 ^C | 55 | 25 | 2 |
| 16 ^C | 55 | 25 | 2 |
| 17 ^C | 55 | 25 | 2 |

^C Center point.

Table 2. The value of different Thermo physical Properties and the statistical indicators

| Property | Value or equation |
|----------|-------------------|
|----------|-------------------|

| | |
|--|---|
| Thickness | 2.10 ⁻³ m |
| Characteristic length | 0.07 m |
| Density of bay Laurel leaves | 830 kg/m ³ (Measured) |
| Initial temperature | 20°C |
| specific heat capacity of dry matter | 3.580 J.kg ⁻¹ .K ⁻¹ (S. S. Chen and M. Spiro) |
| specific heat capacity of liquid water | 4180 J.kg ⁻¹ .K ⁻¹ |
| Latent heat of vaporization | 2.357 10 ⁶ J. kg ⁻¹ |
| Coefficient of mass transfer by convection | Chilton- Colburn analogy (Chilton & Colburn, 1934) |
| Coefficient of heat transfer by convection | Equation 17 |
| Water activity | Karlsson Soininen equation (Karlsson and Soininen, 1982) |
| Effective moisture diffusivity | The present work |
| number of volumes of finite volume | 20 |
| Absolute tolerance | 10 ⁻⁴ |
| Relative tolerance | 10 ⁻⁴ |
| Thermal conductivity of air | CoolProp (C++ library) |
| Density of air | CoolProp (C++ library) |
| Specific heat capacity of air | CoolProp (C++ library) |
| Dynamic viscosity of air | CoolProp (C++ library) |
| Mass diffusivity of air-vapor | CoolProp (C++ library) |
| Thermal diffusivity of air | CoolProp (C++ library) |
| Wet bulb Temperature | Psychrometric Diagram viewer 3.5.0 |
| OF | 0.886 |

Table 3. Heat convective transfer coefficient and the Biot number of mass transfer.
at different drying conditions.

| Run | Ta (°C) | RH (%) | Va (m/s) | h_{est} (w/m ² /K) supprimer cette colonne | h_{cal} (w/m ² /K) supprimer cette colonne | $t_m(X_0, T_{wb}) \times 10^3$ | $t_m(X_{eq}, T_{wb}) \times 10^3$ |
|-----------------|---------|--------|----------|---|---|--------------------------------|-----------------------------------|
| 1 | 40 | 15 | 1 | 7.2 | 14.8 | 5.6 | 6.10 |
| 2 | 70 | 15 | 1 | 33.5 | 14.5 | 5.91 | 1.54 |
| 3 | 40 | 35 | 1 | 6 | 14.7 | 2.71 | 3.89 |
| 4 | 70 | 35 | 1 | 14.5 | 14.2 | 0.94 | 4.42 |
| 5 | 40 | 15 | 3 | 8.5 | 25.6 | 6.61 | 7.20 |
| 6 | 70 | 15 | 3 | 58.3 | 25.1 | 10.1 | 26.9 |
| 7 | 40 | 35 | 3 | 6.8 | 25.5 | 3.07 | 4.44 |
| 8 | 70 | 35 | 3 | 19 | 24.5 | 1.21 | 5.88 |
| 9 | 40 | 25 | 2 | 7 | 20.9 | 3.97 | 5.11 |
| 10 | 70 | 25 | 2 | 23.6 | 20.3 | 2.33 | 8.68 |
| 11 | 55 | 15 | 2 | 15.6 | 20.8 | 5.63 | 9.54 |
| 12 | 55 | 35 | 2 | 8 | 20.5 | 1.33 | 2.75 |
| 13 | 55 | 25 | 1 | 7.8 | 14.6 | 1.88 | 3.92 |
| 14 | 55 | 25 | 3 | 12.8 | 25.3 | 3.08 | 6.50 |
| 15 ^C | 55 | 25 | 2 | 9.3 | 20.6 | 2.20 | 4.54 |
| 16 ^C | 55 | 25 | 2 | 9.3 | 20.6 | 2.25 | 4.69 |
| 17 ^C | 55 | 25 | 2 | 9.3 | 20.6 | 2.19 | 4.69 |

Figures:

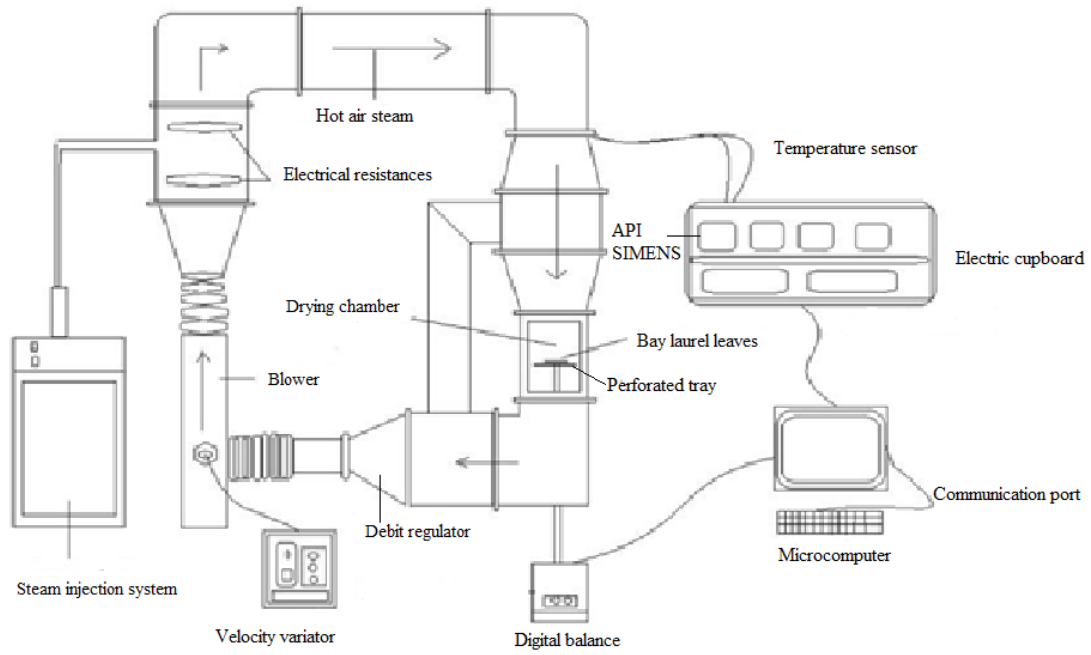


Figure 1. Overall layout of the experimental dryer.




Figure 2. Schematic of finite volume method discretization of calculation domain.

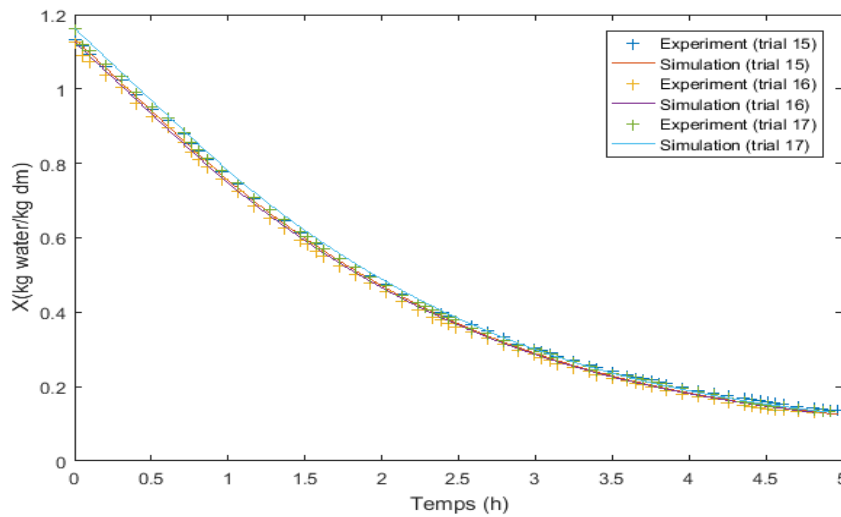


Figure 3. Repetition of drying curve at the center point ($T=55^{\circ}\text{C}$, $\text{RH}=25\%$, $V_a=2\text{ m/s}$)

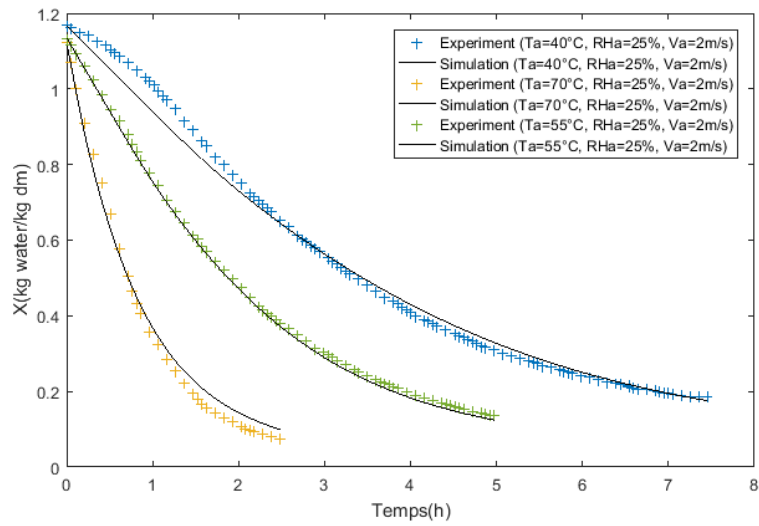


Figure 4. Comparison of temporal evolution of mean moisture content with simulation data at different drying air temperatures.

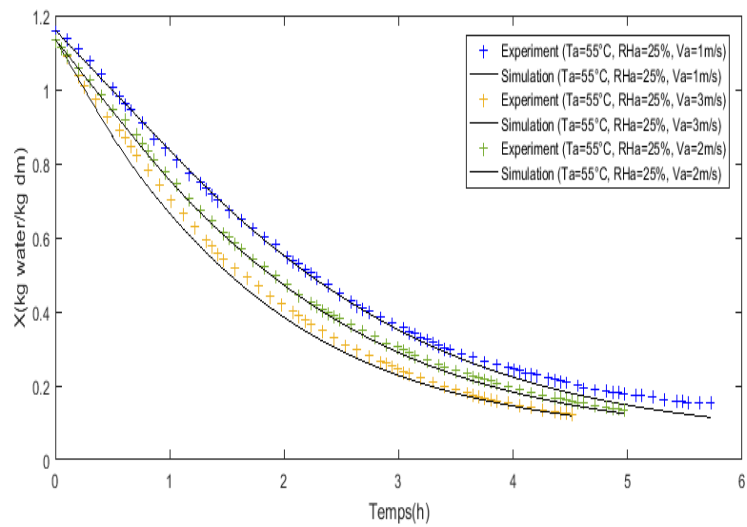


Figure 5. Comparison of temporal evolution of mean moisture content with simulation data at different drying air velocities.

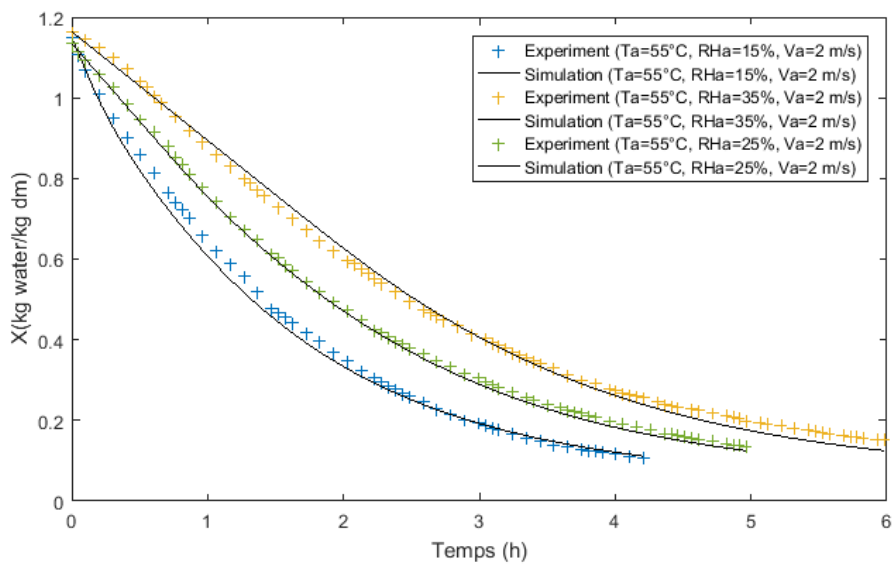


Figure 6. Comparison of temporal evolution of mean moisture content with simulation data at different drying air relative humidity.

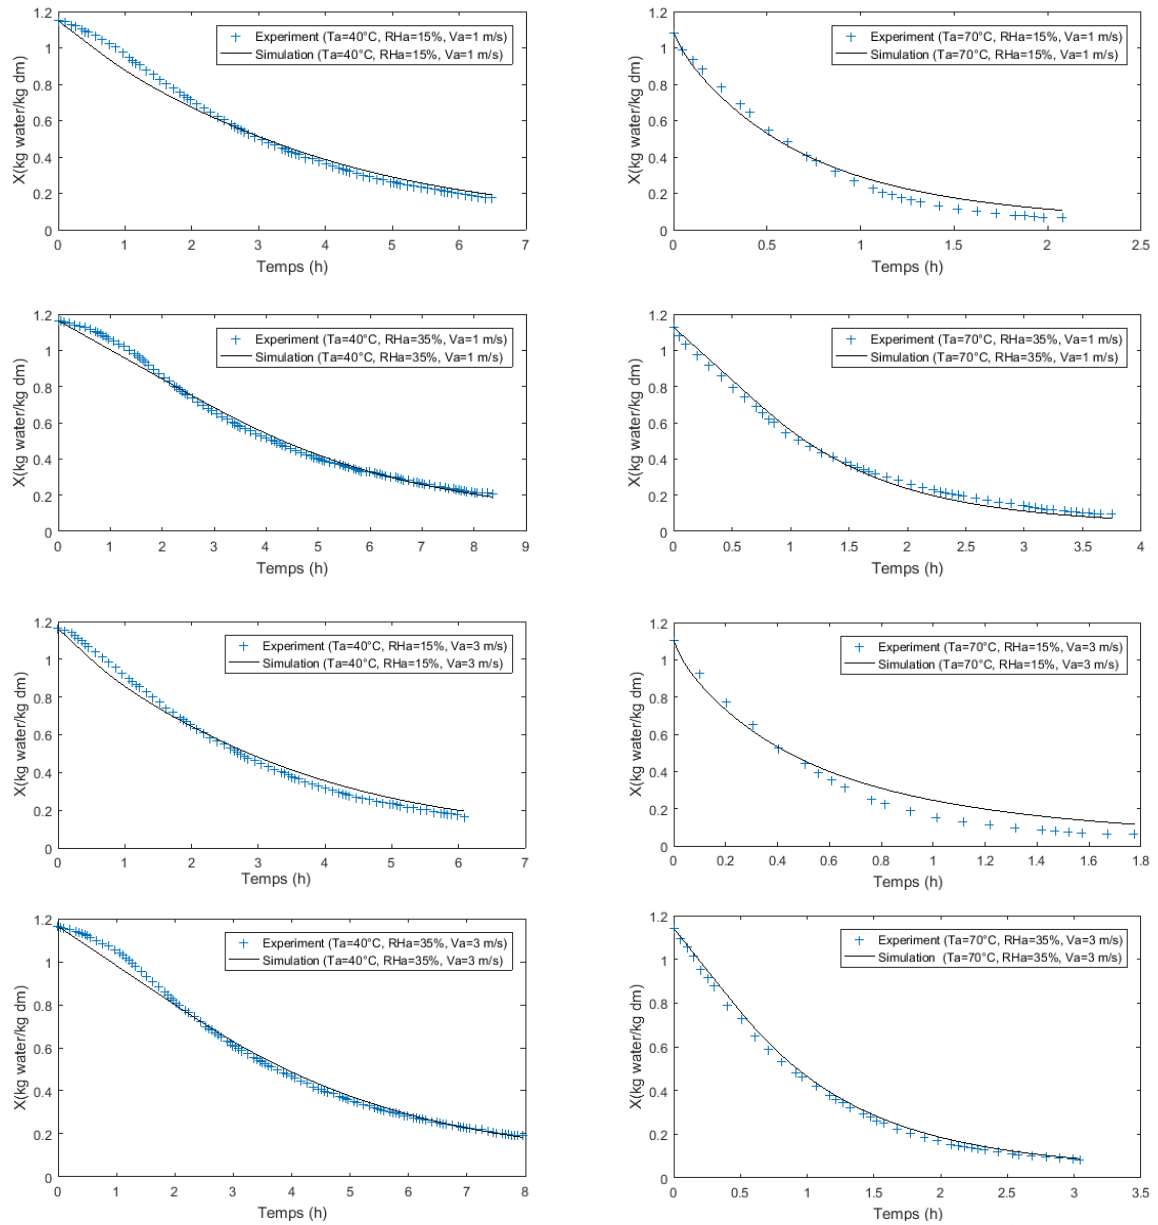


Figure 7. Comparison of simulated and experimental results of drying kinetics of bay leaves (Trials 1-8).