



Drought and flood risk assessment of the Seine basin reservoir management under climate change

David Dorchies, Jean-Claude Bader, Laura Nunez Torres, Olivier Delaigue,
Guillaume Thirel

► To cite this version:

David Dorchies, Jean-Claude Bader, Laura Nunez Torres, Olivier Delaigue, Guillaume Thirel. Drought and flood risk assessment of the Seine basin reservoir management under climate change. IAHS-2022 Scientific Assembly, May 2022, Montpellier, France. 10.5194/iahs2022-105 . hal-03696260

HAL Id: hal-03696260

<https://hal.inrae.fr/hal-03696260>

Submitted on 21 Jun 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.


L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

➤ Drought and flood risk assessment of the Seine basin reservoir management under climate change

David Dorchies, Jean-Claude Bader, Laura Nunez Torres, Olivier Delaigue,
Guillaume Thirel

➤ How to provide robust decision guidance to reservoir managers challenging conflicting objectives?

The case of the Seine lakes protecting for both floods and droughts

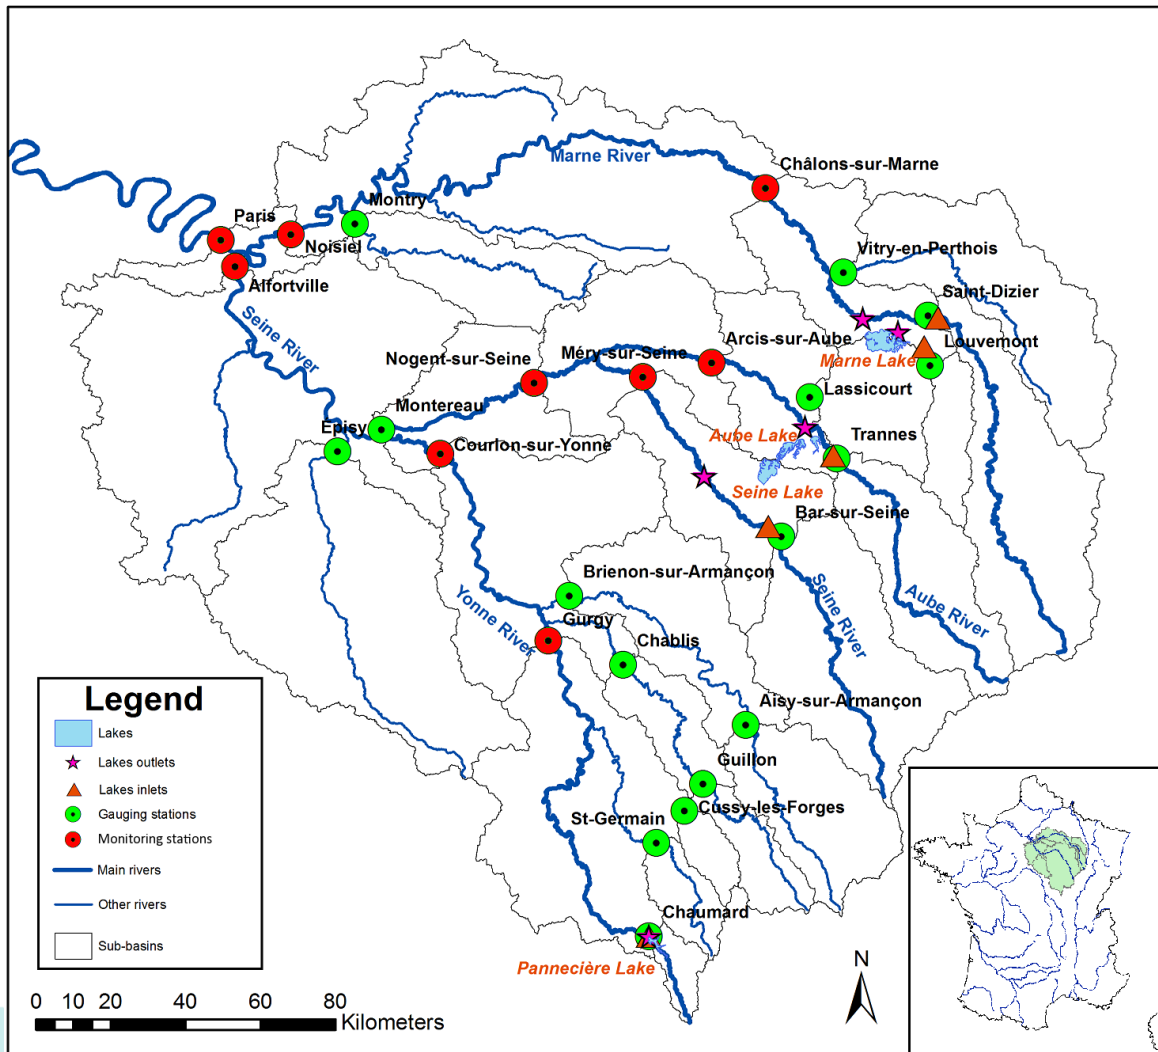

Manager objectives: maintain the flow at monitoring stations (●) between 2 extremes:

- Thresholds for high flows:
 - 3rd: exceptionally flooded areas
 - 2nd: frequently flooded areas
 - 1st: bankfull discharge
- Thresholds for low flows (based on water use restriction thresholds):
 - 1st: vigilance
 - 2nd: alert
 - 3rd: reinforced alert
 - 4th: crisis

➤ How to provide robust decision guidance to reservoir managers challenging conflicting objectives?

The manager must balance between **Proactive** and **Reactive** Decisions...

Proactive (be ready for a future event) vs **Reactive** (Coping with an event)

Floods


Reactive decision:
laminating the flood



filling the reservoir



INRAE

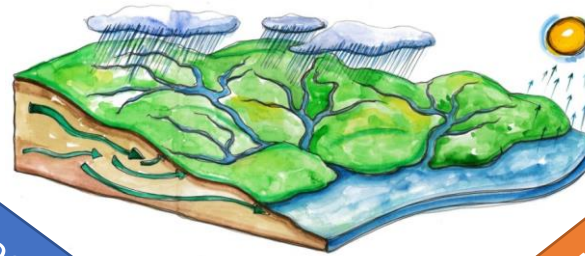

Droughts

Reactive decision:
supplying the river



emptying the reservoir



➤ How to provide robust decision guidance to reservoir managers challenging conflicting objectives?

The usual way (for scientists): **the multi-objective optimizer**



“ A very limited uptake of optimization tools by the water resource managers because:

- limited understanding of the benefits and scope of the optimization
- adopting excessively complex methodologies may generate practical problems that do not compensate for the benefits
- lack of trust in the realism of models that leads to discarding optimization results

” (Pianosi et al. 2020)

➤ How to provide robust decision guidance to reservoir managers challenging many conflicting objectives?


From many objective decision... to a decision based on risk prioritization

The manager wants to minimize the risk to fail objectives...
... but not all at the same time because some less important objectives can undermine more important ones

This means that the manager has to prioritize between acceptable and unacceptable risks for each objective depending on the situation

How to get decisions that the manager can justify in the complex context of many conflicting objectives ?

A dashboard of the risks of future failure for each objective, taking into account the state of the system and the climate, would enable the manager to regain control of the decision-making process

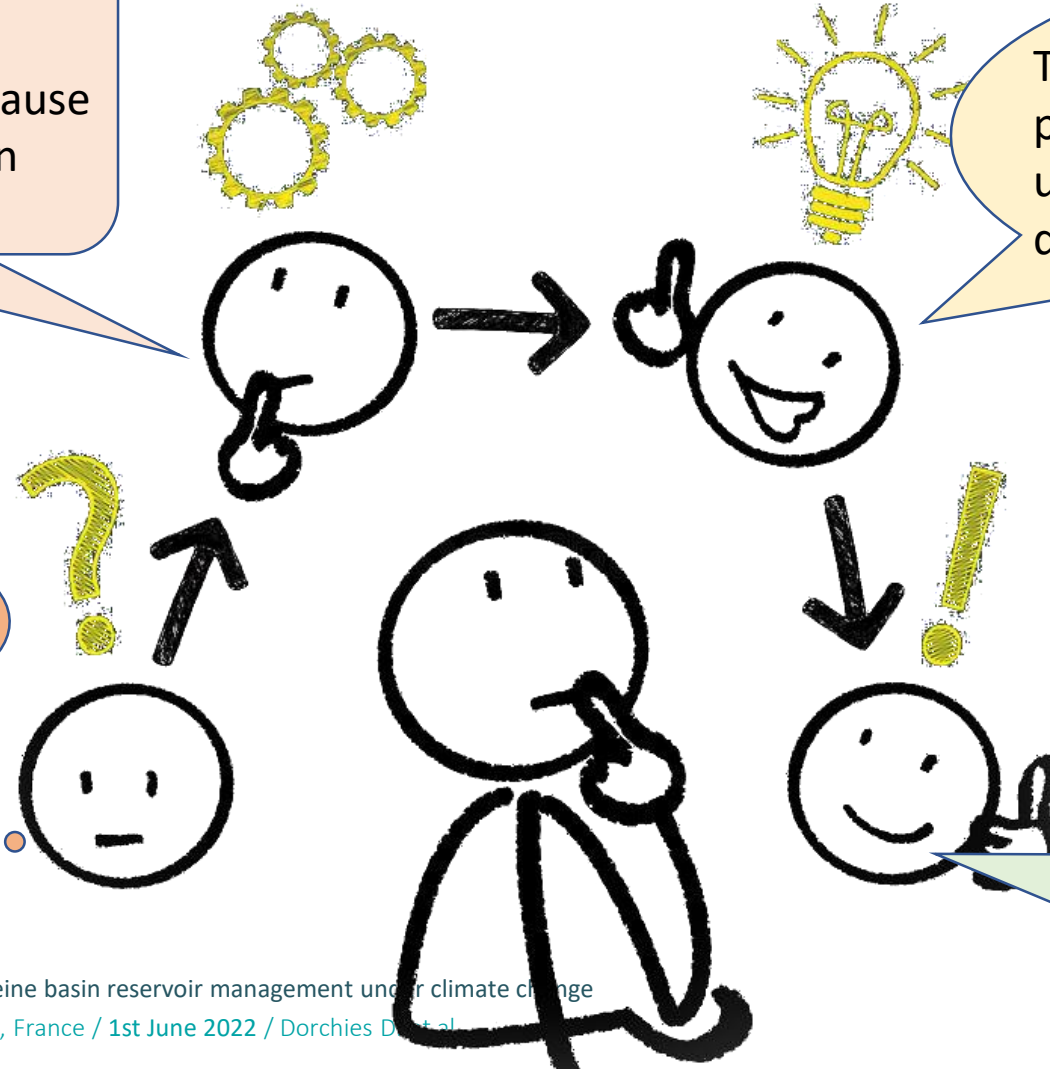

➤ From single objective optimization... to many objective risk assessment

How to compute optimal proactive decisions for a given objective?

The problem is solved by dynamic programming:

- Modeling the minimum reservoir release (resp. filling) in reverse time for proactively handling flood (resp. drought) events


The model uses:

- A daily naturalized flows available at each monitoring station and at the reservoirs,
- a lag hydraulic routing model
- constraint sets (physical constraints and local management rules such as minimum biological flow...)

315 optimizations performed
(9 monitoring stations x 7 thresholds x 5 constraint sets)

Example:


Optimal release of the 4 reservoirs before the 1910 flood in Paris to maintain the flow under the 2nd high flow threshold (1600 m³/s)

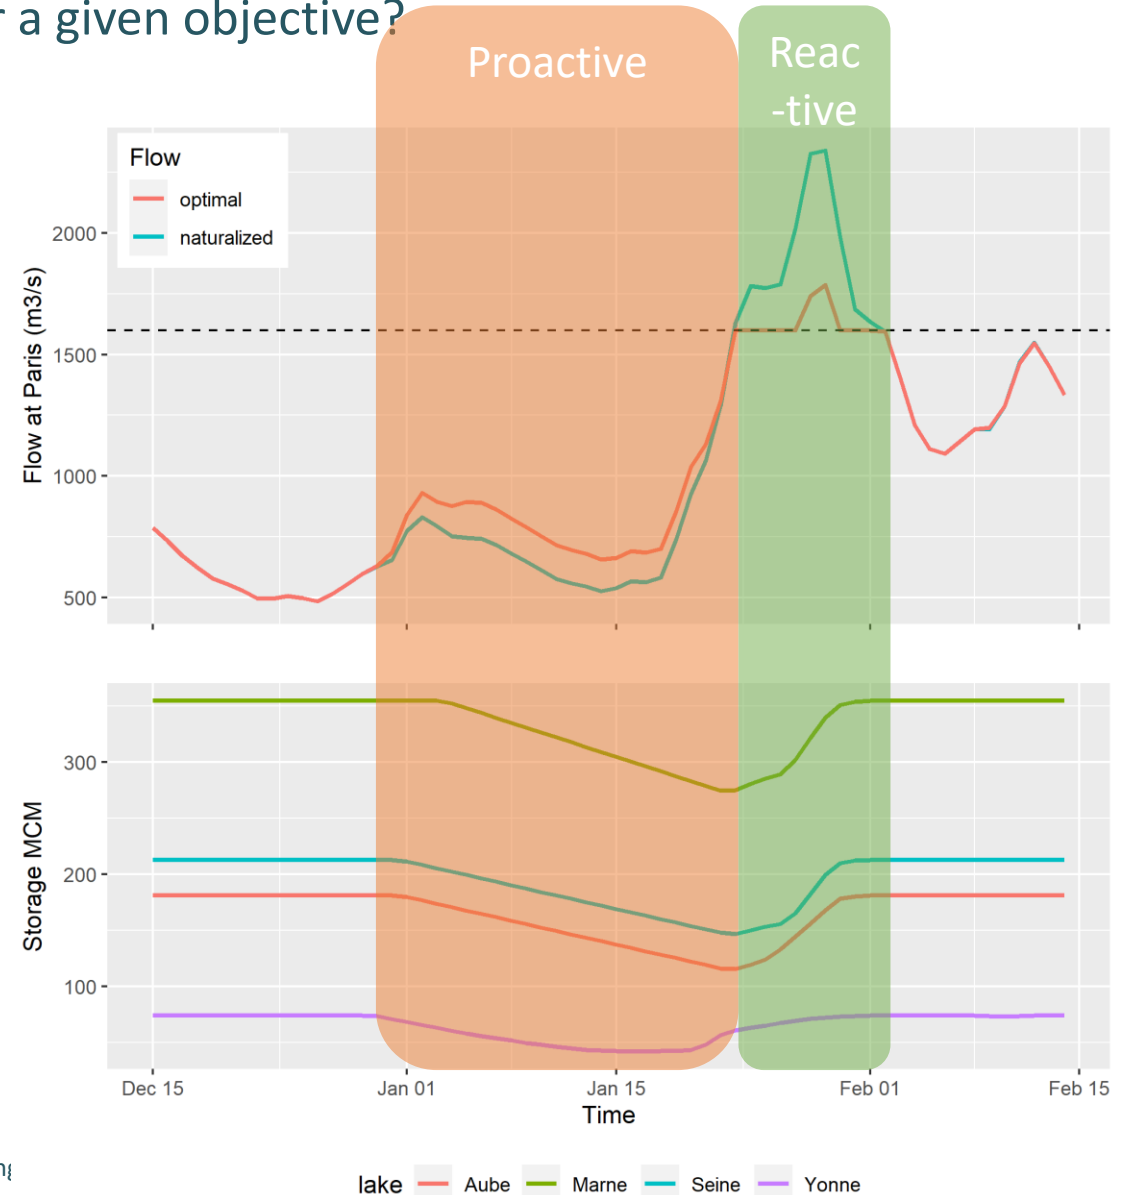

➤ From single objective optimization... to many objective risk assessment



How to convert optimal filling curves into risk assessment curves?

The risk assessment is based on evaluation of return period of extreme events by calculating optimal filling curves from daily naturalized flows

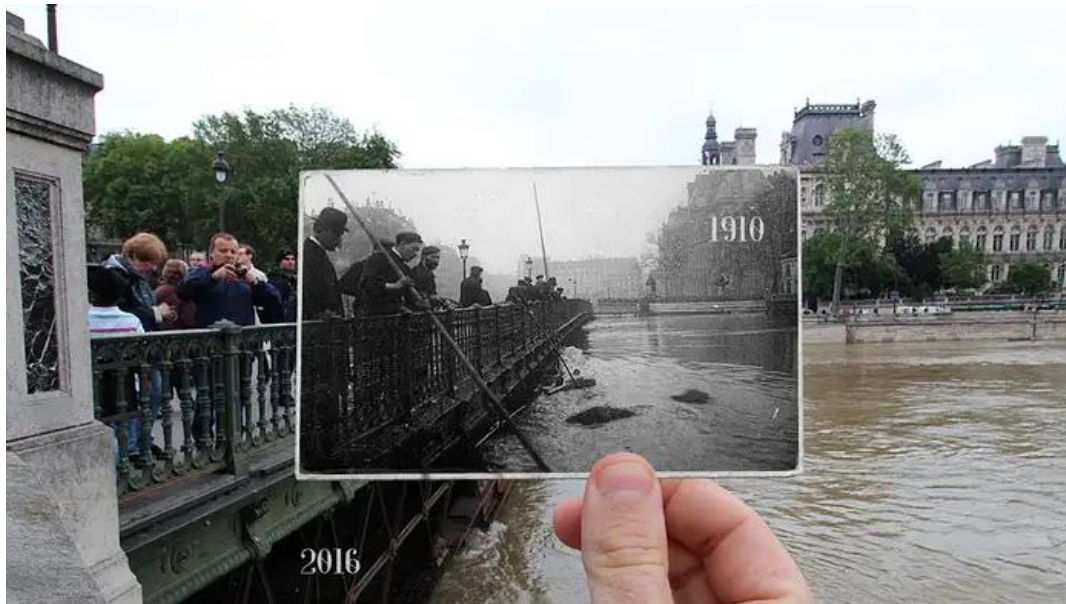

Credit: Julien Knez (<https://kultt.fr>)

Example of optimal minimum volume in Lake Yonne to achieve the objective of a minimum flow of 12,5 m³/s at Gurgy (1900-2009)

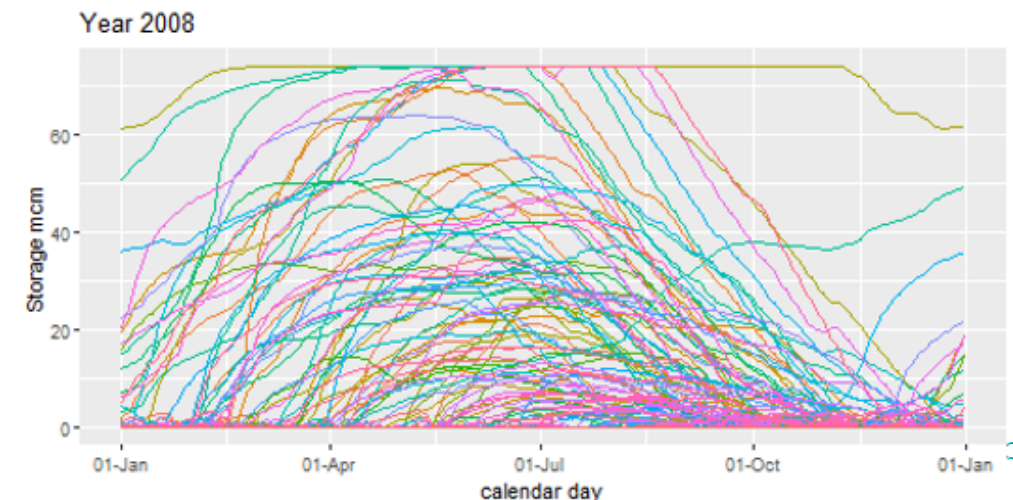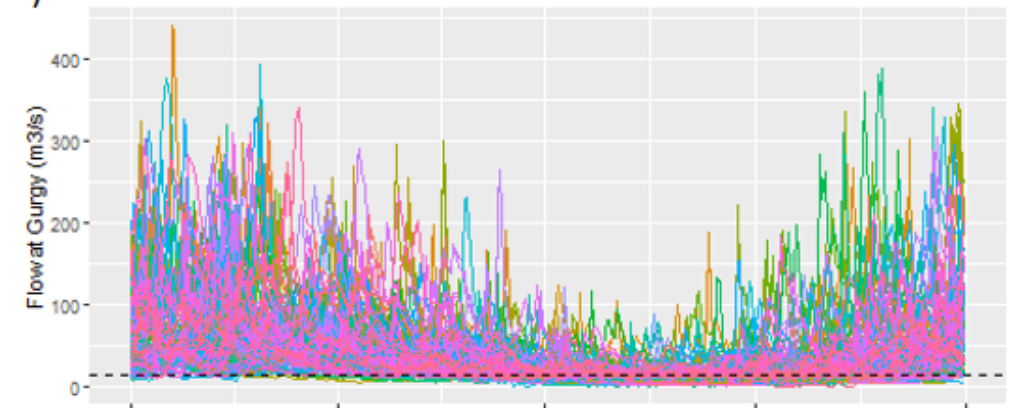


INRAE

Drought and flood risk assessment of the Seine basin reservoir management under climate change
Scientific Assembly of the IAHS, Montpellier, France / 1st June 2022 / Dorchies D. et al.


➤ From single objective optimization... to many objective risk assessment

How to convert optimal filling curves into risk assessment curves?

Sorted curves gives minimum (resp. maximum) stored volume associated with the probability of failing to achieve a future drought (resp. flood) event

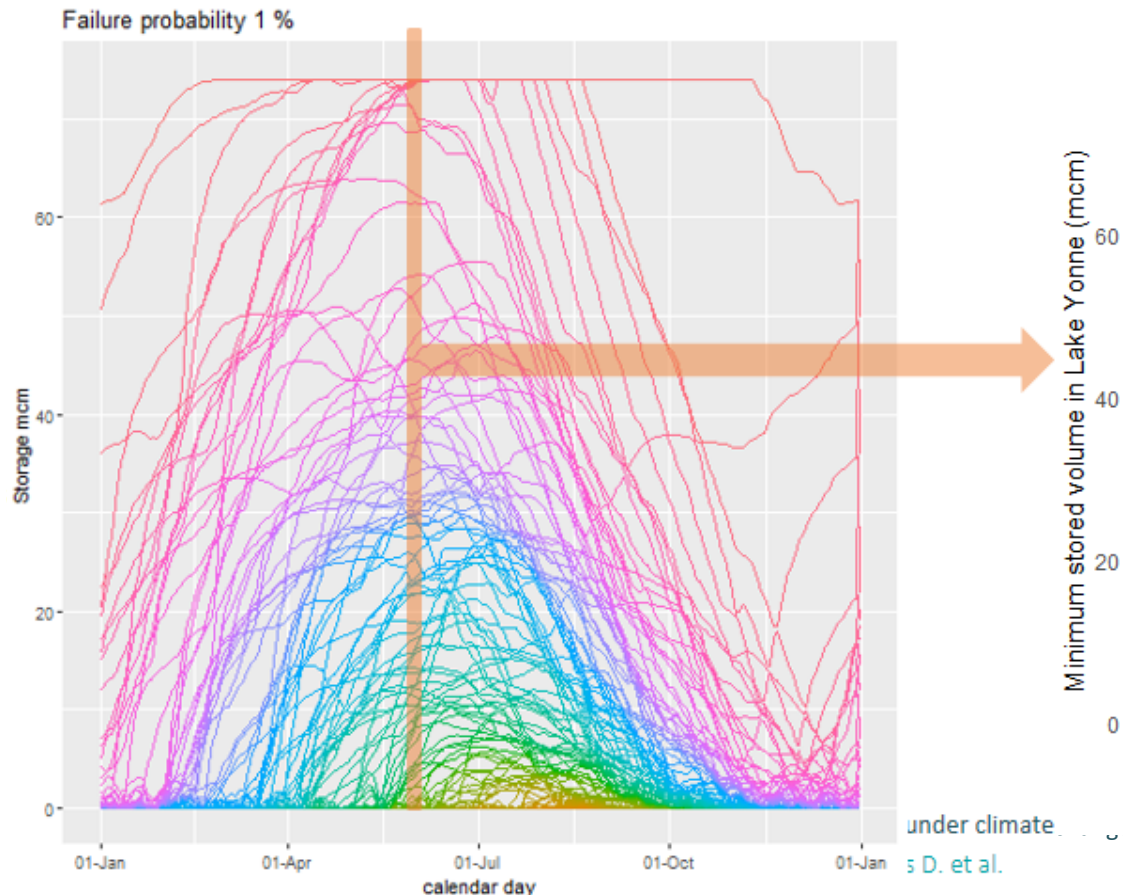



For each calendar day, we obtain the probability of future failure of the objective associated to the current stored volume (1900-2009)

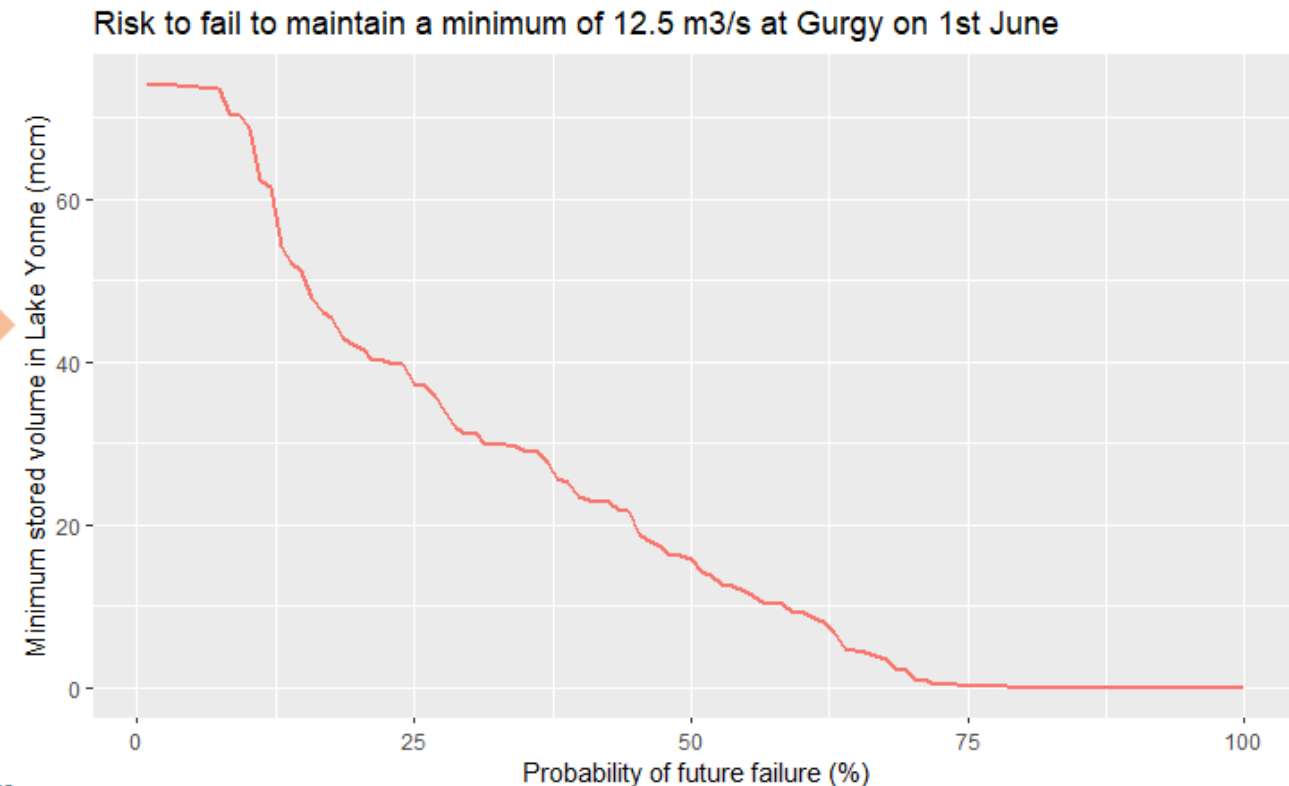

➤ From single objective optimization... to many objective risk assessment

Towards an interactive risk assessment dashboard: <http://irmara.g-eau.fr>

All results of single objective optimizations are stored in a database where failure risk probabilities are available for all objectives:

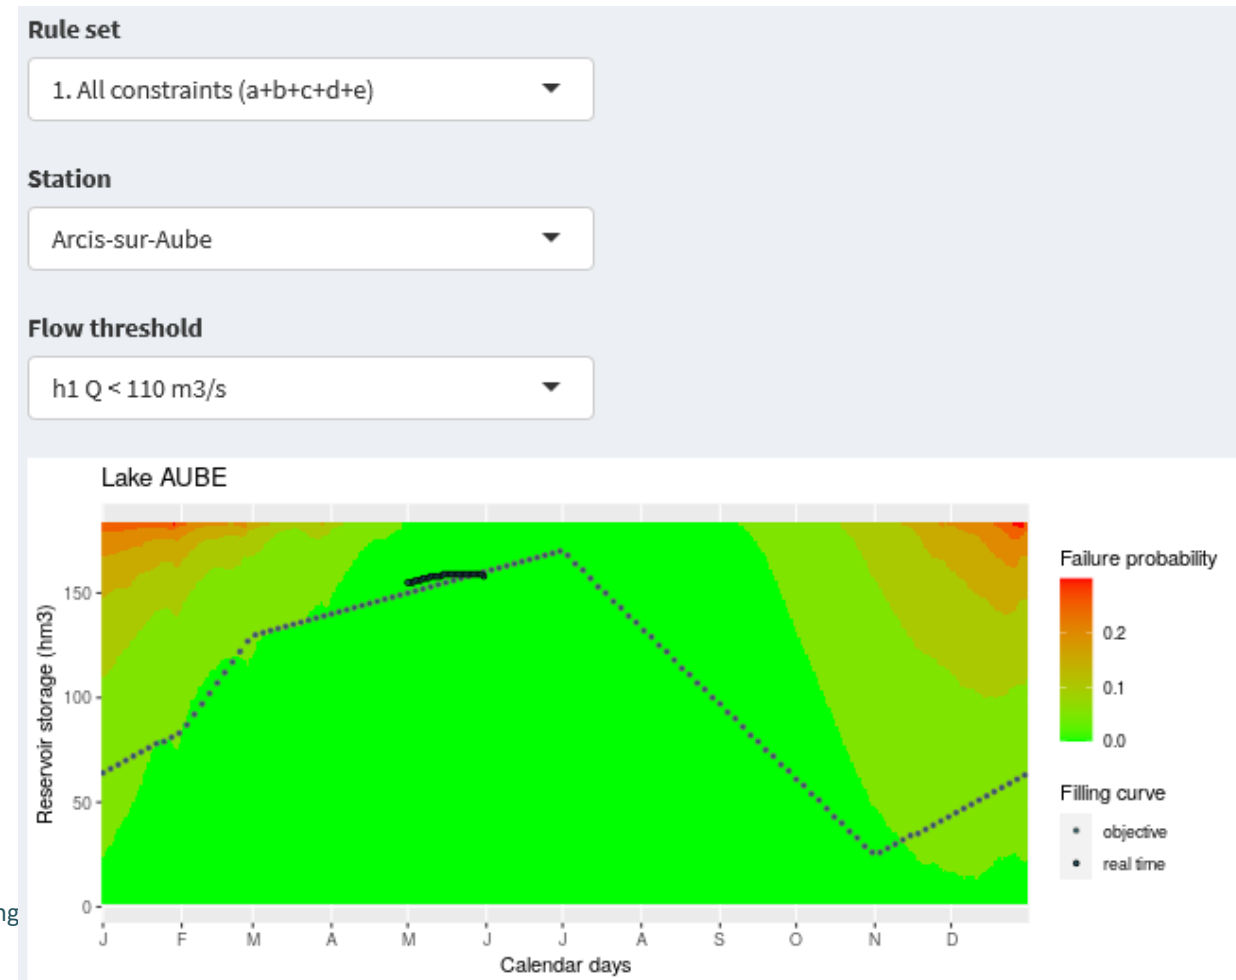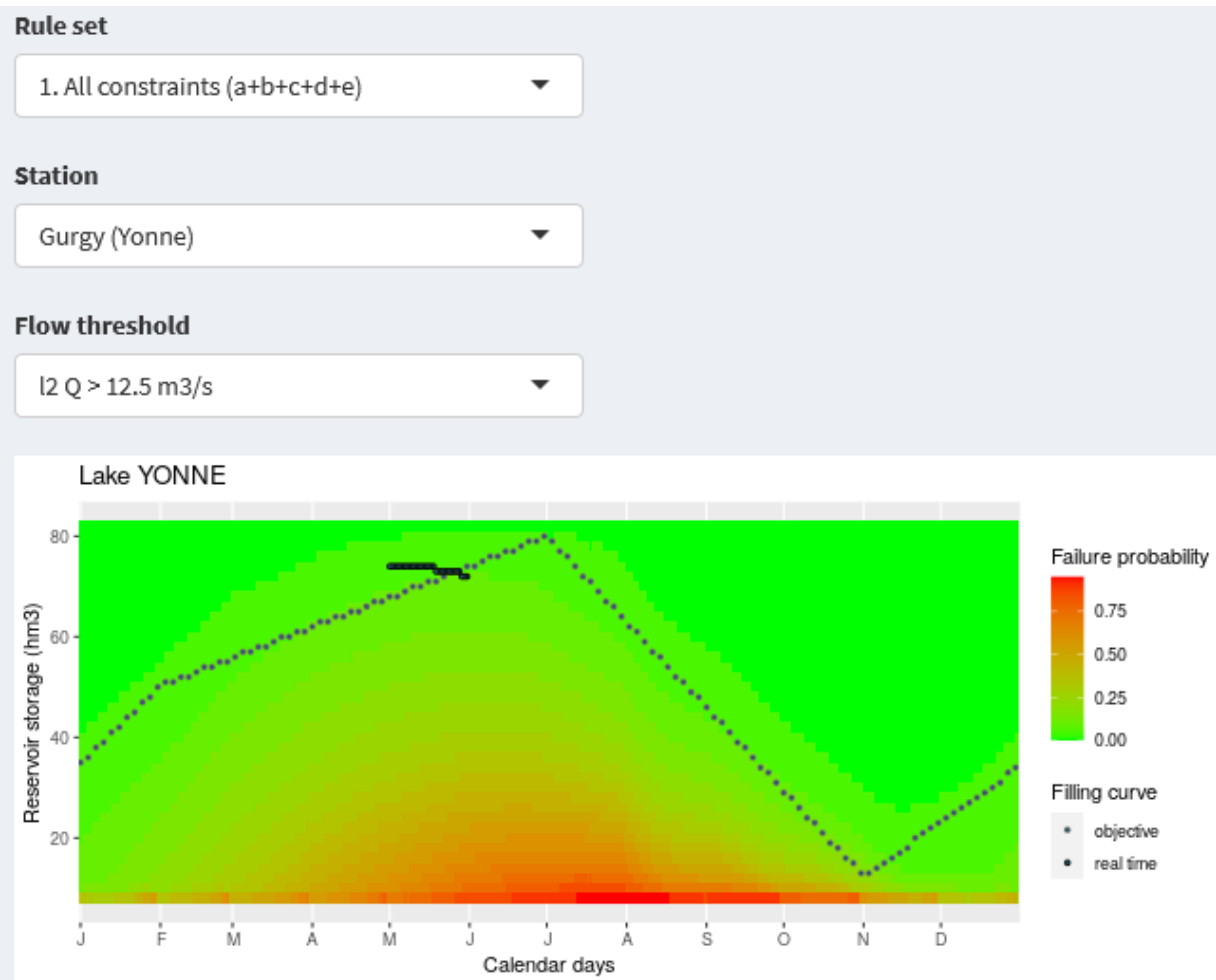

➤ From single objective optimization... to many objective risk assessment

Rule set

1. All constraints (a+b+c+d+e)

Date:

2022-05-22


Reservoir storage mode

☐ manual ☐ objective curve ☒ real time value

YONNE lake (hm3)





SEINE lake (hm3)



AUBE lake (hm3)



MARNE lake (hm3)

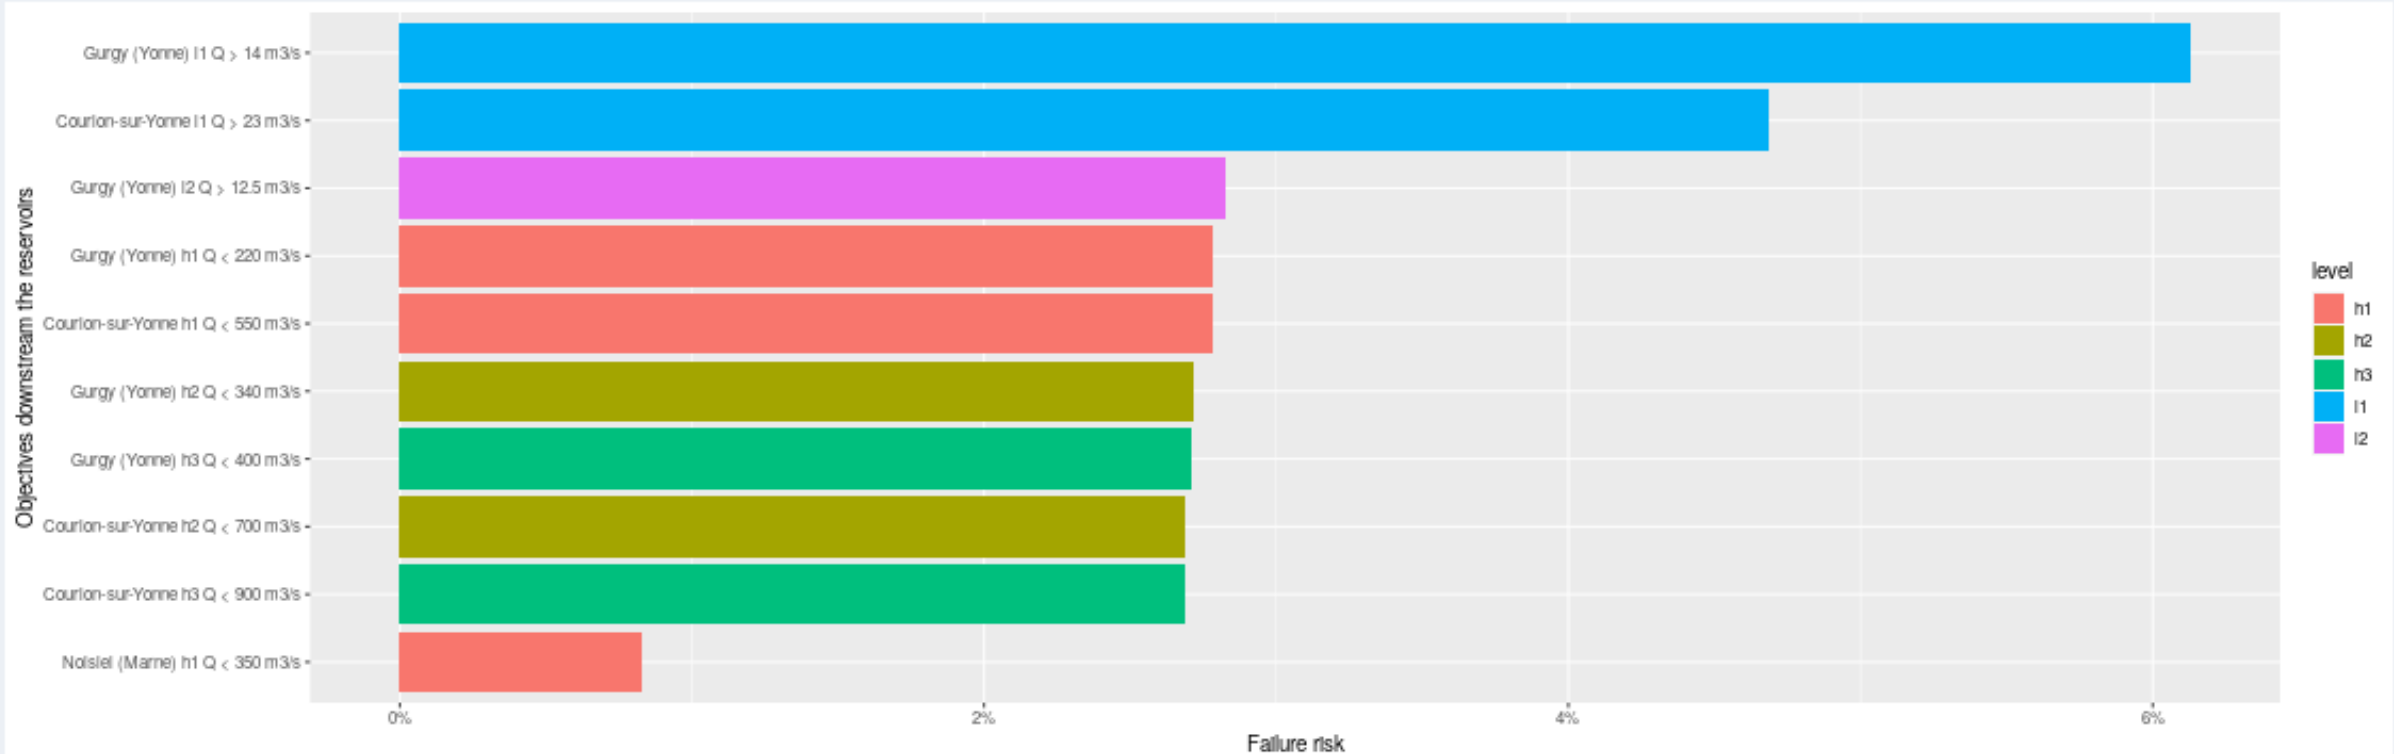


➤ How to deal with climatology unstationarity?

By doing the same exercise with naturalized flows modelled from climate projections

We set up a daily time-step semi-distributed hydrological model of the Seine River basin thanks to the airGRiwrM R package:

- 144 gauging stations used for calibration/simulation
- 1958-2019 SAFRAN reanalysis for historical meteorology
- Direct calibration of the model with influenced flows
- Flow naturalization by removing the reservoirs from the model
- Simulation with 1950-2100 DRIAS2020 climate change projections (5 GCM/RCM pairs for both RCP4.5 and RCP8.5)


Map of evolution of the maximum annual daily flow with a 10-year return period between 1976-2005 and 2021-2050 (median value over 5 RCP8.5 scenarios)

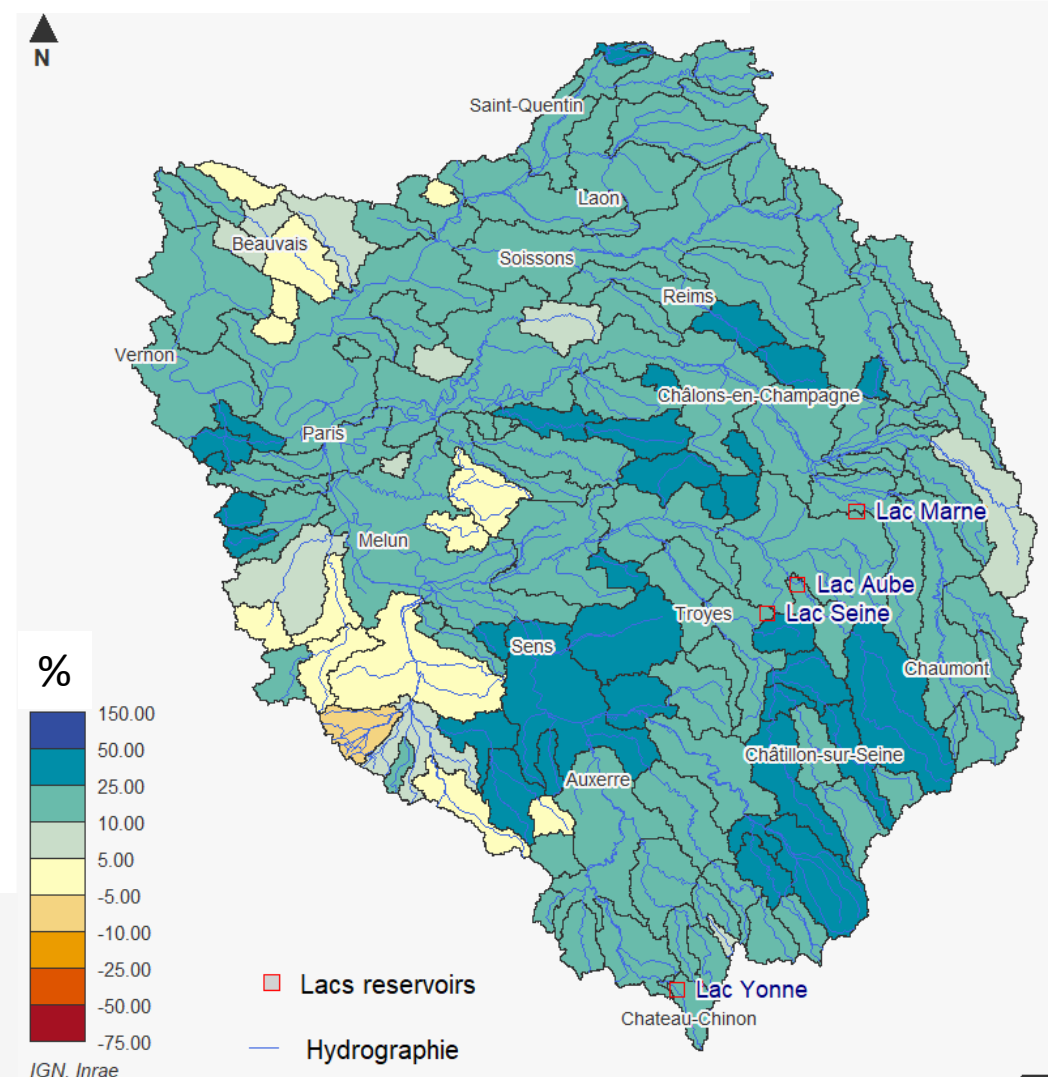

➤ How to deal with climatology unstationarity?

A work in progress...

- Run single objective optimizations with naturalized flows from climate scenarios
- Integration of the results in the interactive tool <https://irmara.g-eau.fr>
- Compute the risk assessment from a free choice of naturalized flow sources and periods:

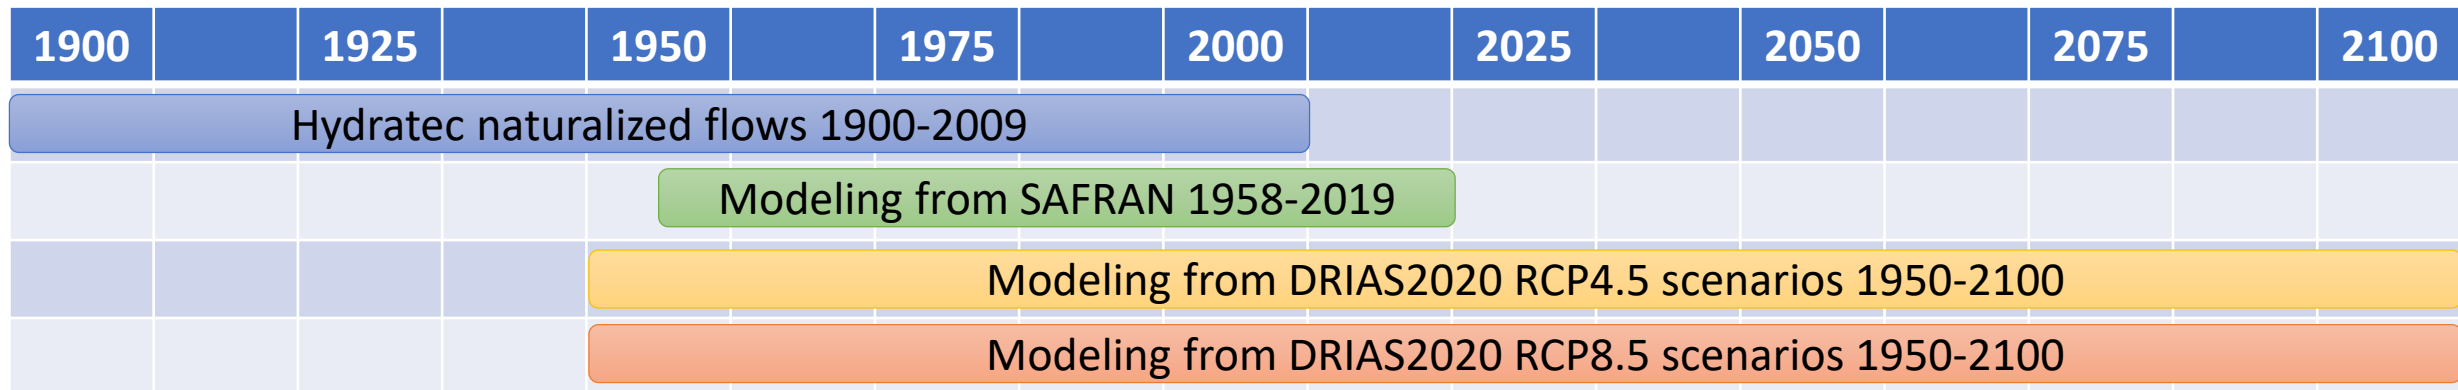

➤ Conclusion and perspectives

Current key points:

We are going to provide a decision risk assessment dashboard to the water resources managers:

- for multi-reservoir based on climatology statistics (historical or projections)
- this allows the manager to evaluate the risk of undermining proactive management when reactive decisions are taken

Future works:

- Derive real-time management rules from failure risk aversion defined by the water resources manager
- Test the robustness of the method in uncertain future
- Compare simulations of these management rules with current rules and other multi-objective optimizations

