



HAL
open science

Preferential flow in surface and subsurface soils of the recharge area of a groundwater aquifer

Lionel Alletto, Yves Coquet, Pierre Vachier, Christophe Labat

► **To cite this version:**

Lionel Alletto, Yves Coquet, Pierre Vachier, Christophe Labat. Preferential flow in surface and subsurface soils of the recharge area of a groundwater aquifer. Third international conference on Water Resources Management, Apr 2005, Algarve, Portugal. hal-03933997

HAL Id: hal-03933997

<https://hal.inrae.fr/hal-03933997v1>

Submitted on 11 Jan 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Preferential flow in surface and subsurface soils of the recharge area of a groundwater aquifer

L. Alletto^{1,2}, Y. Coquet², P. Vachier² & C. Labat²

¹ École Supérieure d'Agriculture de Purpan, Agronomy department, Toulouse, France.

² UMR INRA/INA PG Environment and Arable Crops, Thiverval-Grignon, France.



Preferential flow in soils : the Mobile-Immobile Model




Context of the study



Materials and Methods



Results and Discussion



Conclusion



Part I



Preferential flow in soils : the Mobile-Immobile Model

Preferential transport: water short-circuiting a fraction of porosity thus increasing the downward flux rate of solutes

2 models of preferential transport:


- via the macroporosity (root channels, earthworms holes, cracks...) in water content is near or at saturation ...

- via the mesoporosity, the microporosity acting as a source-sink for solutes (by diffusion): Mobile-Immobile Model (MIM)




All the porosity is active:

1 $\theta = \theta_m$

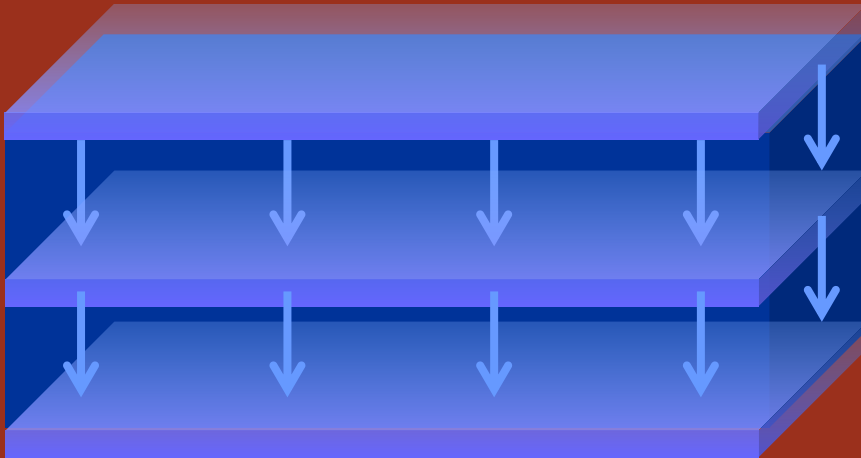

$$V_{w1} = \frac{J_w}{\theta_m} = V_w = \frac{J_w}{\theta}$$

2 $\theta = \theta_m + \theta_{im}$

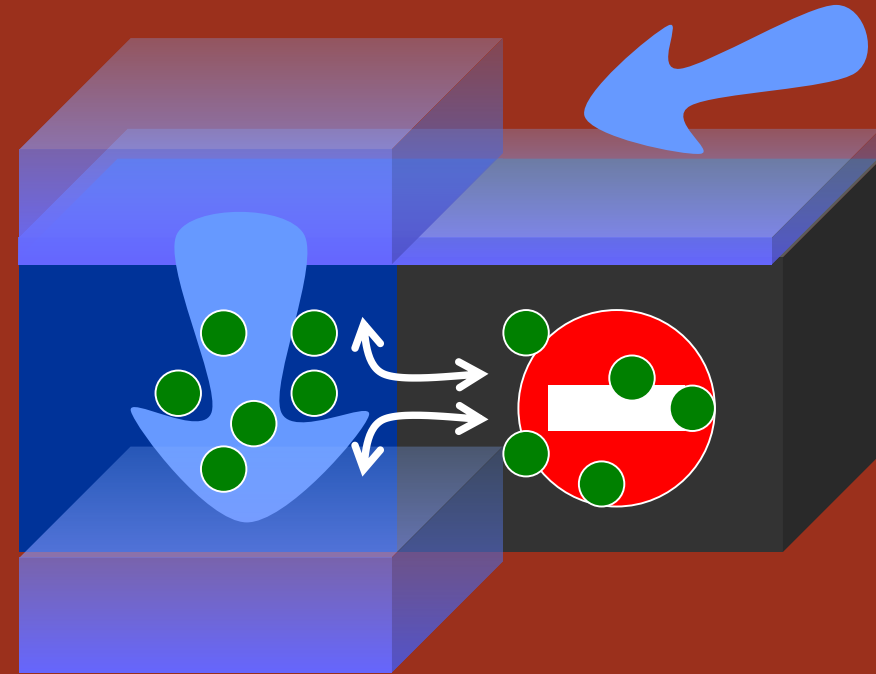

$$V_{w2} = \frac{J_w}{\theta_m} > V_w = \frac{J_w}{\theta}$$

α

$$\theta_{im} \frac{\partial C_{im}}{\partial t} = \alpha (C_m - C_{im})$$

Part II



Context of the study




Tertiary aquifer of the agricultural region of Beauce (France):
contamination with several pesticides ($C > 0.1 \mu\text{g.L}^{-1}$)

Objectives of the study

1- Diagnose the existence of preferential transport of the MIM type in a soil profile

2- Estimate the (hydraulic conductivity) parameters of the MIM model: the immobile water fraction $\theta_{\text{im}}/\theta$ and the mass exchange coefficient α of various materials from surface down to 1m-depth soil layers

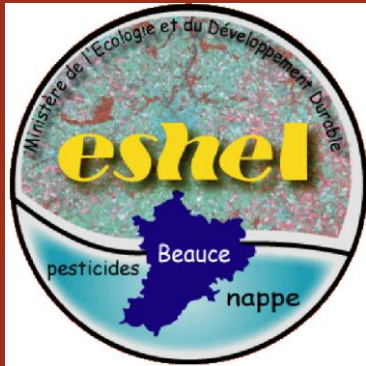

Part III



Materials and Methods



The agricultural field site of Ouarville (Beauce)

- 25 ha

- ploughed in September 2003

- winter wheat sown in November 2003

- measurements : April-May 2004

**0-27 cm A_p
ploughed organo-
mineral horizon**


**27-60 cm B_t clay-
enriched
illuvial horizon**

**60-88 cm B heavy
(red) clay horizon**

**88+ cm C
weathered
limestone**

Layer	Depth	pH	Clay	Silt	Sand	OC	CaCO ₃
			g.kg ⁻¹				
A_p	3	5.93	223	701	75	11.1	1.34
B_t	35	6.55	352	607	41	6.0	<1
B	65	7.70	565	306	124	5.2	4.66
C	92	8.44	339	57	16	3.5	564

⇒ Orthic luvisol (FAO, 1998)

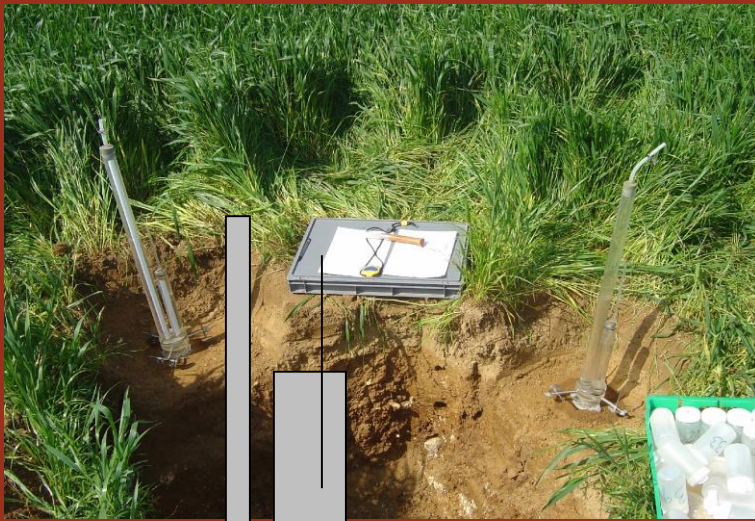


1

Infiltration of water and 4 sequential infiltrations with tracers ($\varnothing = 8$ cm)
matric potential -0.1 kPa

2

Soil sampling : each 1 cm
down to 10 cm

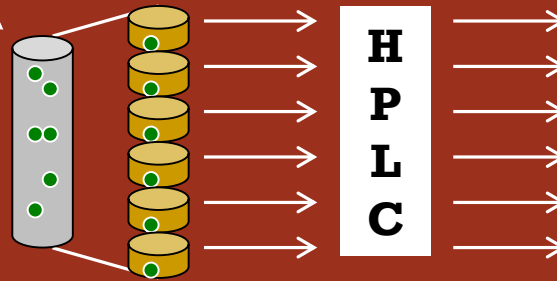


3

- Determination of water content θ ($\text{cm}^3 \cdot \text{cm}^{-3}$), bulk density ρ_b ($\text{g} \cdot \text{cm}^{-3}$) and the hydraulic conductivity, $K(-0.1$ kPa) ($\text{mm} \cdot \text{h}^{-1}$)
- HPLC analysis

4

- Determination of immobile water content θ_{im}/θ , and the mass exchange coefficient α

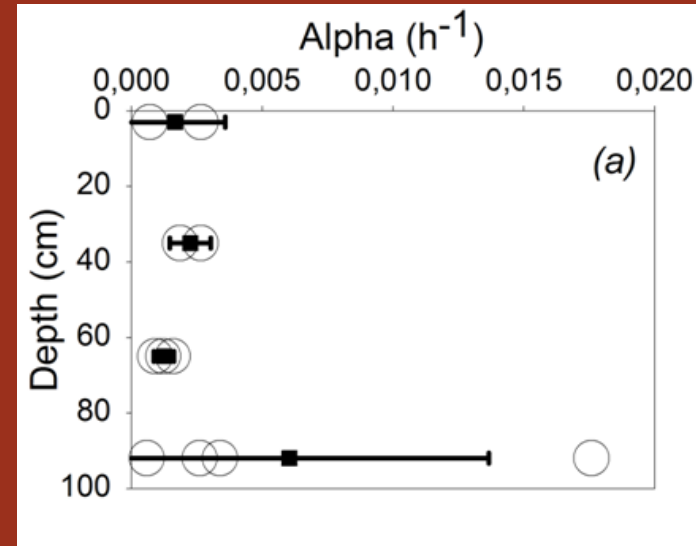

Assumptions of the model (Jaynes et al., 1995)


- Initial tracers concentrations = 0
- $C_m = C_0$ (no effect of the hydrodynamic dispersion in the mobile domain in the sampling volume)

Under these assumptions:

$$\Rightarrow \theta C = \theta_m C_m + \theta_{im} C_{im}$$


$$\Rightarrow \ln(1-C/C_0) = - \alpha t / \theta_{im} + \ln(\theta_{im} / \theta)$$

Part IV



Results and Discussion


A_p

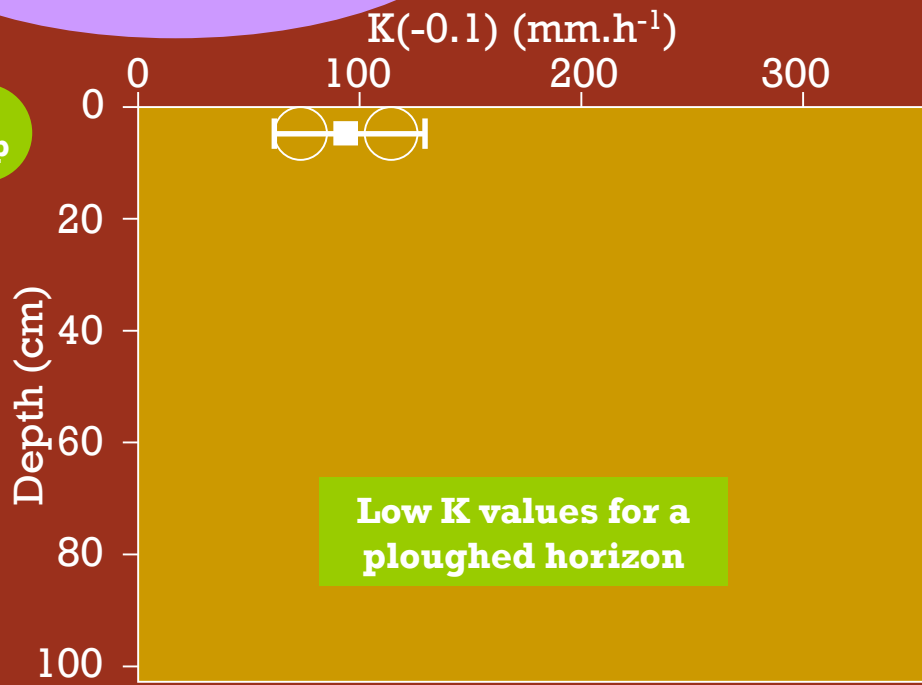

Rotary harrow tillage = homogenisation of the upper part of this horizon



Ploughing: high hydraulic conductivity with a high variability (Coutadeur et al., 2002)

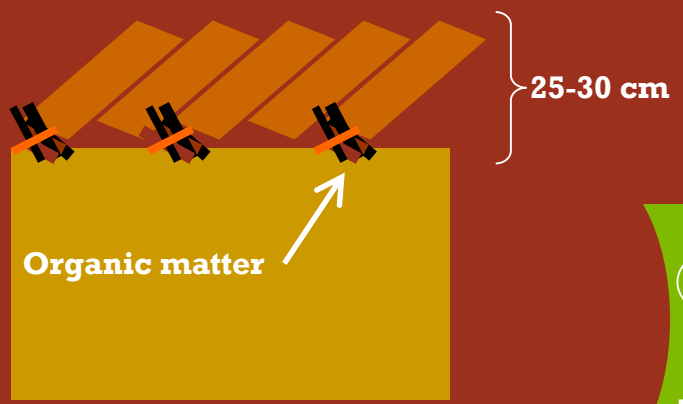


Rotary harrow tillage


Macroporosity destroyed = low K values
Homogenisation = low K variability

Legend

- measured value
- geometric mean value
- Error bar (95% confidence limit)

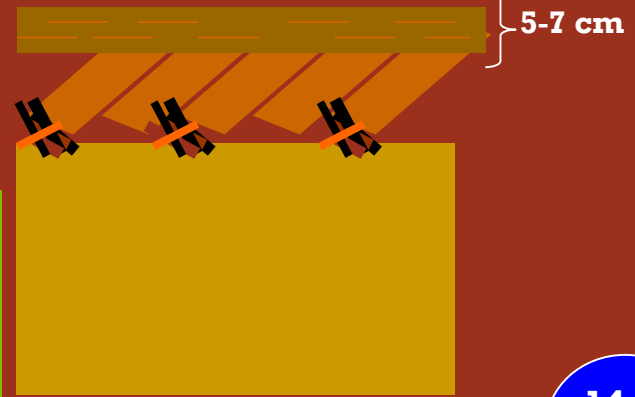

B_t

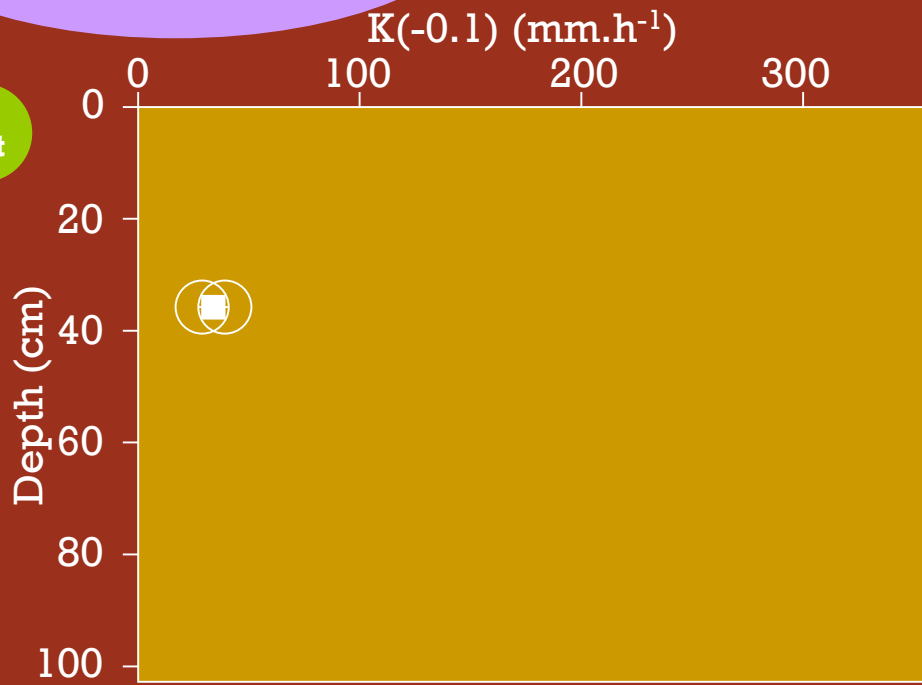



No-tillage + sub-angular structure + coatings (clay illuviation) = low hydraulic conductivity and low variability



Very limited water infiltration = low K at the matric potential of -0.1 kPa


Clay illuviation = coatings around aggregates

Sub-angular and partially compact structure

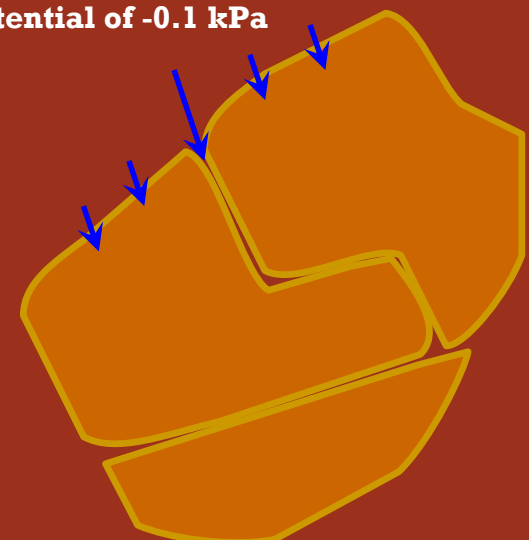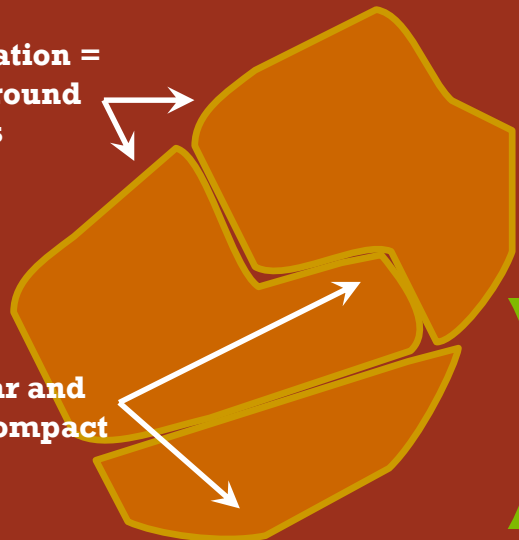


Legend

- measured value
- geometric mean value
- Error bar (95% confidence limit)

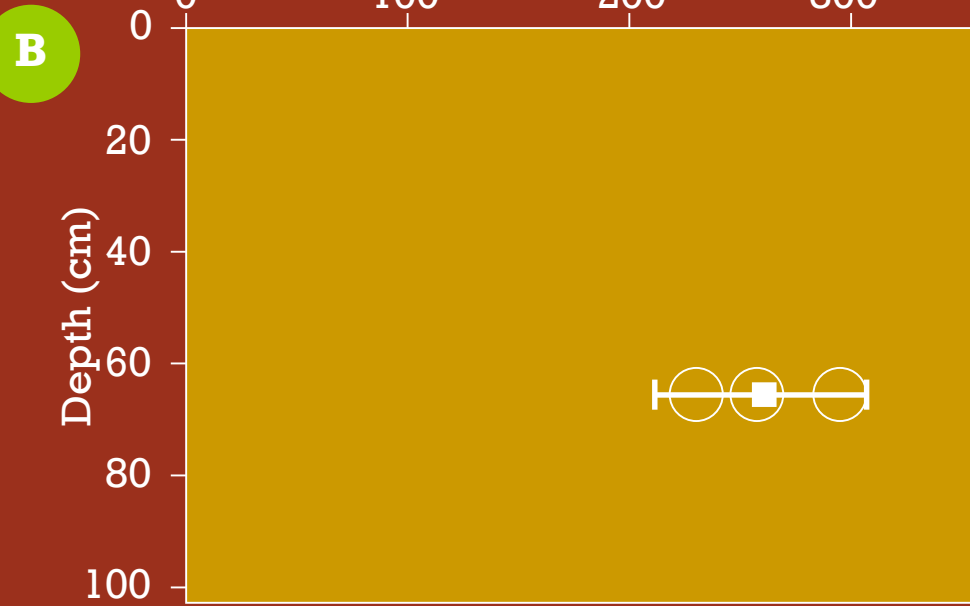


Large aggregates with bio-porosity = water could easily run between them

→ High hydraulic conductivity

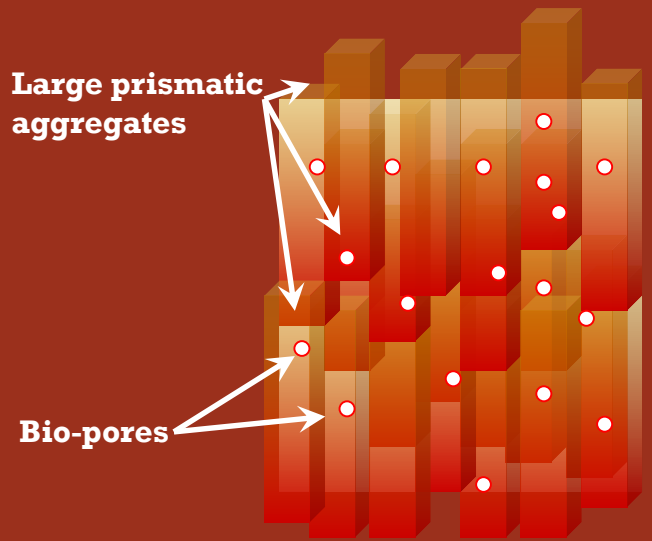


Legend

- measured value
- geometric mean value
- |— Error bar (95% confidence limit)

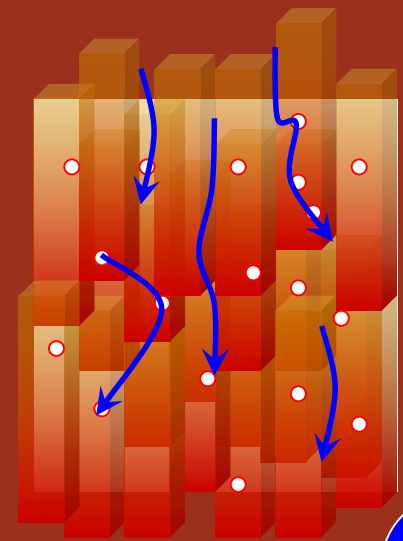


C

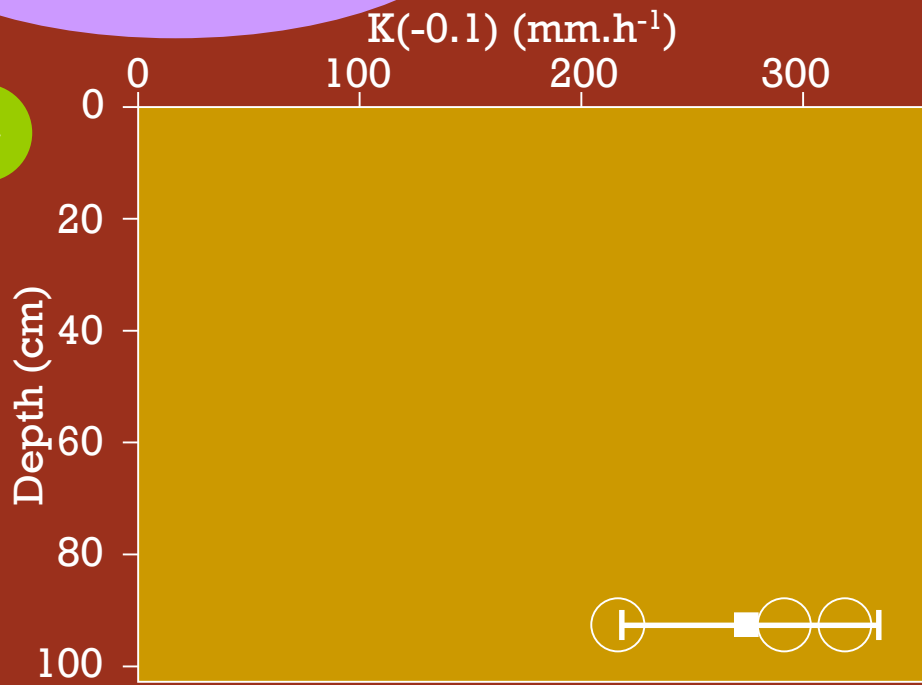


Weathered limestone : high hydraulic conductivity due to important fracturation and weathering processes

Small well-structured aggregates

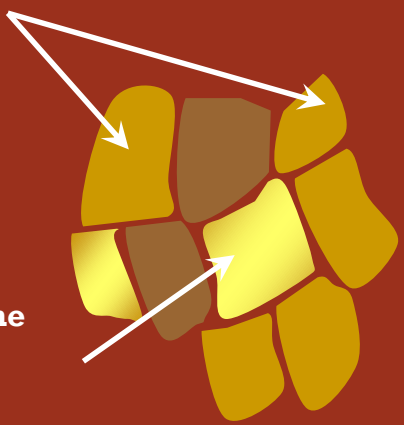


Calcareous stone (with a variable fraction and distribution)

High hydraulic conductivity with a high variability due to a short-range heterogeneity of the limestone

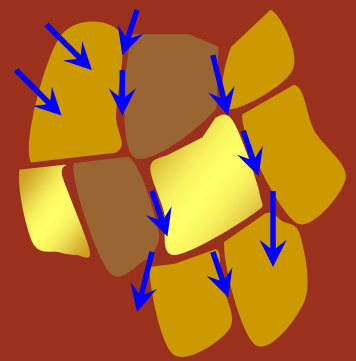

Legend

- measured value
- geometric mean value
- Error bar (95% confidence limit)

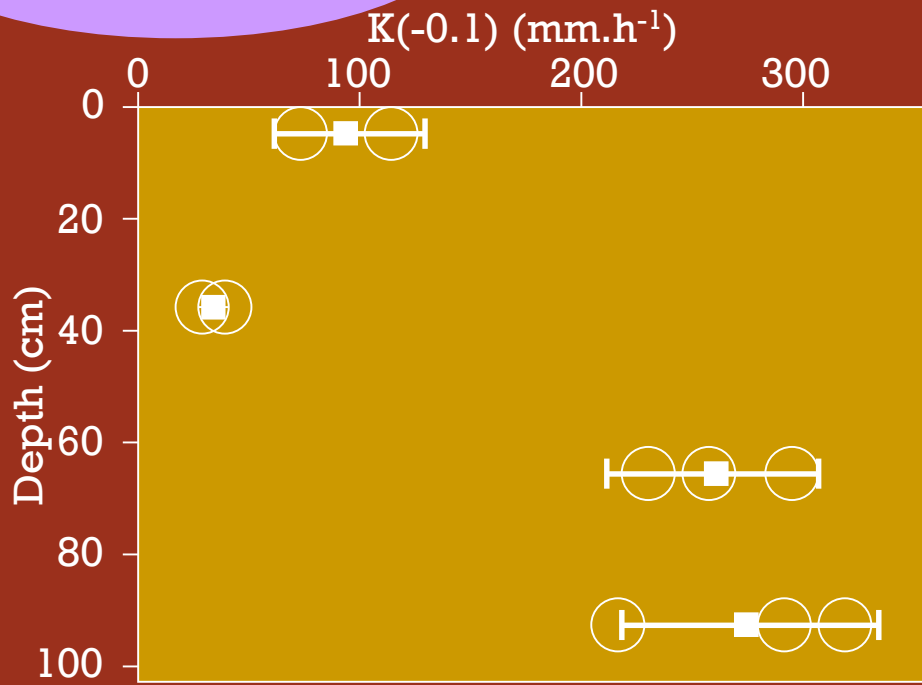


Rotary harrow tillage = homogenisation of the upper part of this horizon

No-tillage + compact structure + coatings (clay illuviation) = low hydraulic conductivity and low variability

Large aggregates with bio-porosity = water could easily run


Weathered limestone : high hydraulic conductivity due to important fracturation and weathering processes



Structure created by tillage and/or pedogenetic processes has impact on the hydraulic conductivity

MIM parameters

High variability of θ_{im}/θ : localization and size of the seedbed aggregates?

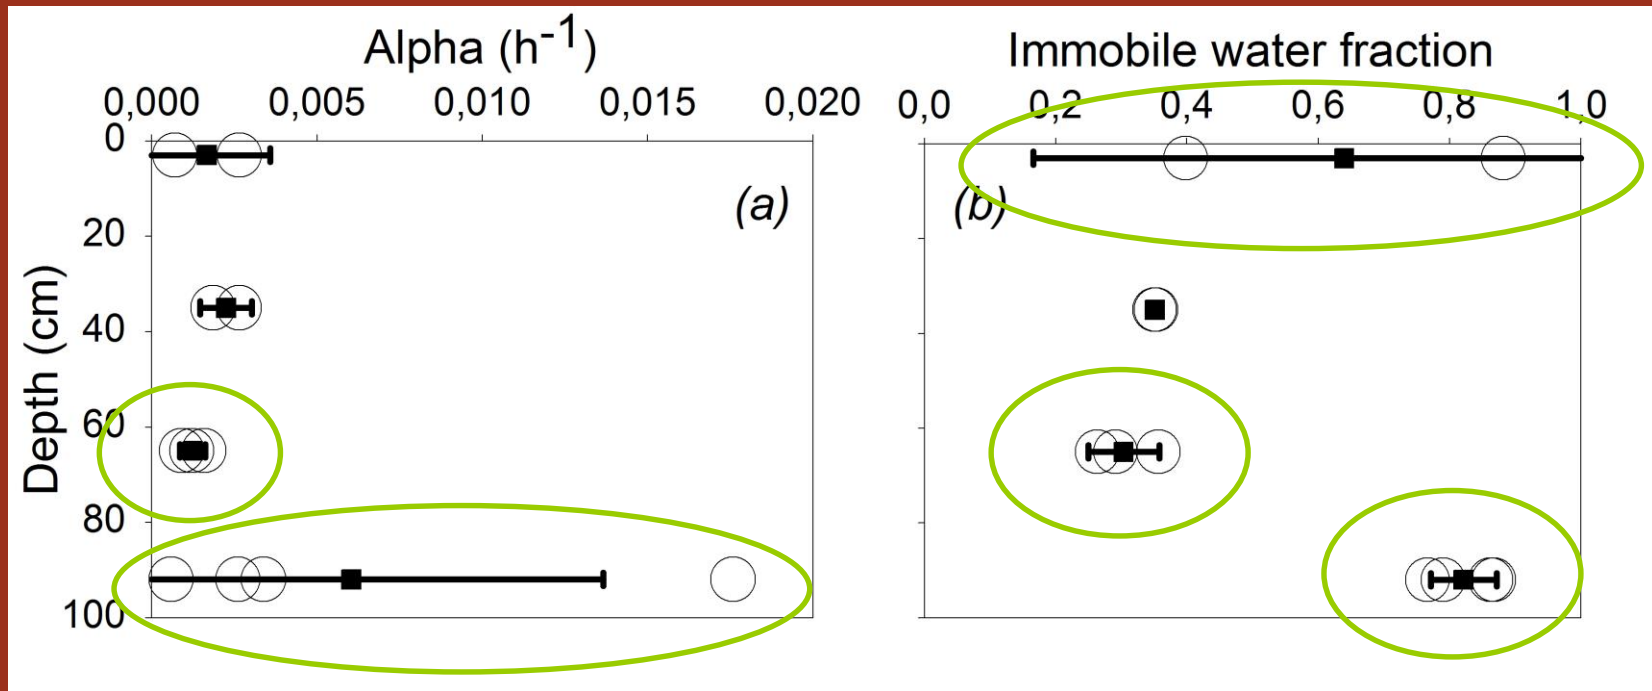


α min: 0.0006 h^{-1} max: 0.0176 h^{-1}

θ_{im}/θ min: 0.263 max: 0.882

→ MIM type of preferential transport is a characteristic of the Beauce soils


MIM parameters: Assumptions for B and C horizons

B horizon: large prismatic aggregates

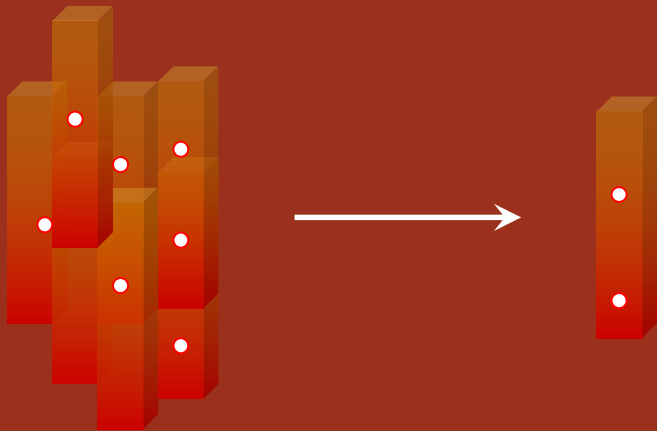

limited exchange surfaces = low α values

C horizon: small well-structured aggregates

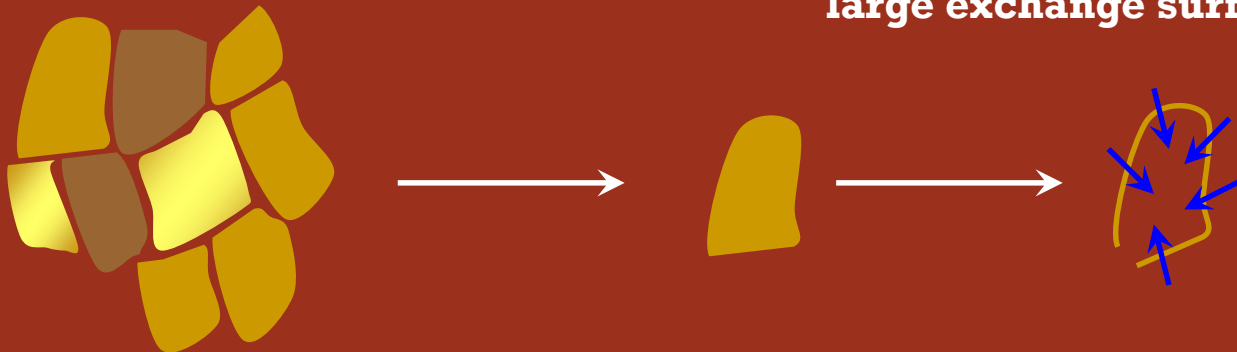

large exchange surfaces = high α values

Part V



Conclusion

Preferential flow of the MIM type seems to be a characteristic of the Beauce soils in surface and subsurface

Soil structure plays an important role on the hydraulic conductivity but also on the occurrence of MIM-type preferential flow

Management of soil structure, through tillage practices, appears to be a possible strategy for acting on water and solutes transfer in soil

Thank you.

