



HAL
open science

A reduced model for Sustainable Operations of Water Distribution Systems

Olivier Piller, Jochen Deuerlein, Sylvan Elhay, Angus Simpson

► **To cite this version:**

Olivier Piller, Jochen Deuerlein, Sylvan Elhay, Angus Simpson. A reduced model for Sustainable Operations of Water Distribution Systems. 19th Computing and Control for the Water Industry Conference 2023, De Monfort University (Leicester), Sep 2023, Leicester (R.-U.), United Kingdom. 10.13140/RG.2.2.30581.35047 . hal-04224109

HAL Id: hal-04224109

<https://hal.inrae.fr/hal-04224109v1>

Submitted on 1 Oct 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.


A reduced model for Sustainable Operations of Water Distribution Systems

Olivier Piller, Jochen Deuerlein, Sylvan Elhay and Angus Simpson
INRAE/UR ETTIS, France; 3S Consult GmbH, Germany;
Univ. of Adelaide, Australia;




Overview

- Comprehensive framework that includes **linkflow and outflow min-max constraints and pressure control** for steady-state analysis

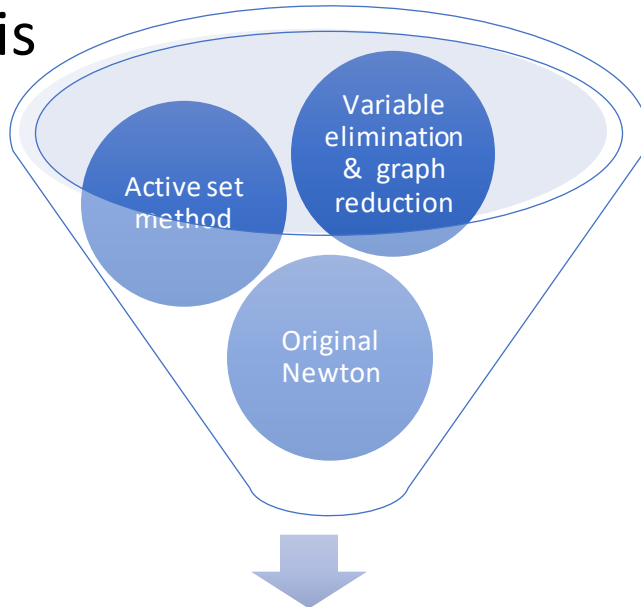

1. Background
2. Regularization
3. Reduced model
4. Illustrative example

Flow and pressure constraints for sustainable operation of WDSs

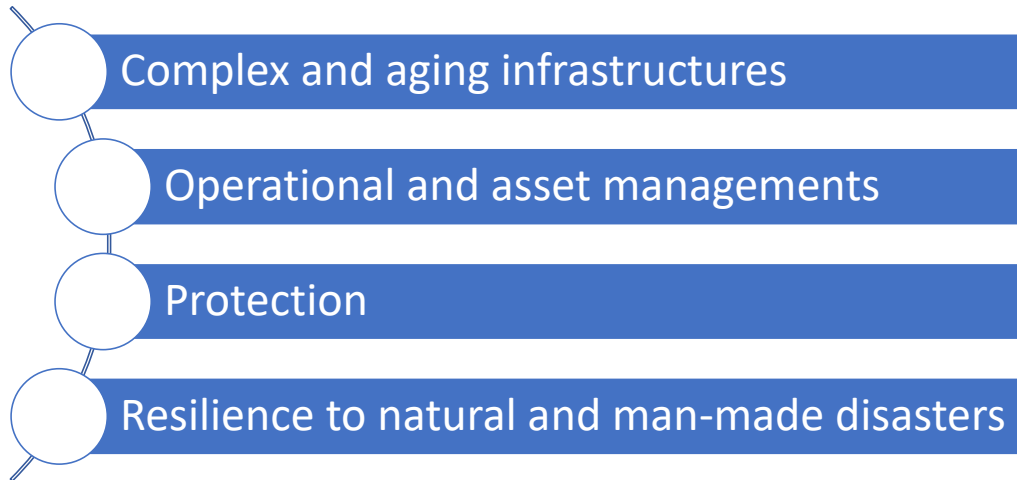


- ❖ Ulusoy et al. (2020) & Nerantzis et al. (2020)
 - Design-for-Control MINLP
 - Optimal control of VSPs & valves
- ❖ Abraham et al. (2017)
 - Self-cleaning networks
 - Minimum velocity & closed pipes

Control of velocity and pressure for sustainable management

The DDM Content function

Calculation of the hydraulic steady-state is equivalent to the minimization of the nonlinear, differentiable and strictly convex content function:

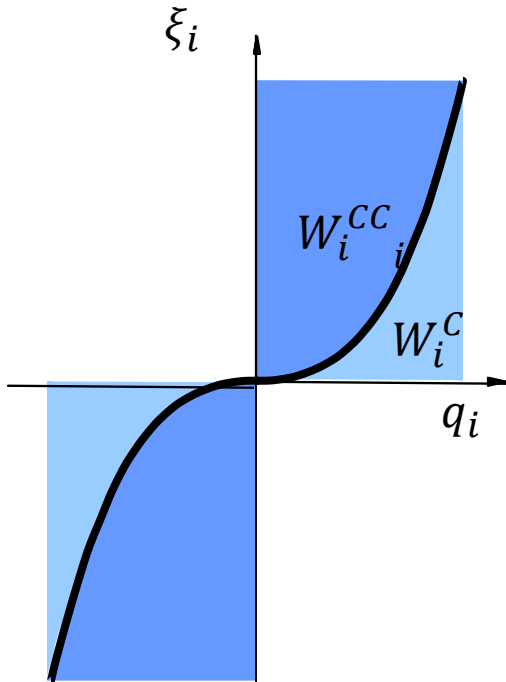


$$\min_{\mathbf{q} \in \mathbb{R}^{n_p}} C(\mathbf{q}) \stackrel{\text{def}}{=} \sum_{i=1}^{n_p} \overbrace{\int_0^{q_i} \xi_i(x) dx}^{W_i^C} - \mathbf{q}^T \mathbf{A}_0 \mathbf{h}_0$$

$$\text{s. t. } -\mathbf{A}^T \mathbf{q} - \mathbf{S}_d^T \mathbf{d} = \mathbf{0}_{n_j}$$

Cherry (1951)
Collins et al. (1978)

The PDM Content function

Deuerlein et al. (2019)

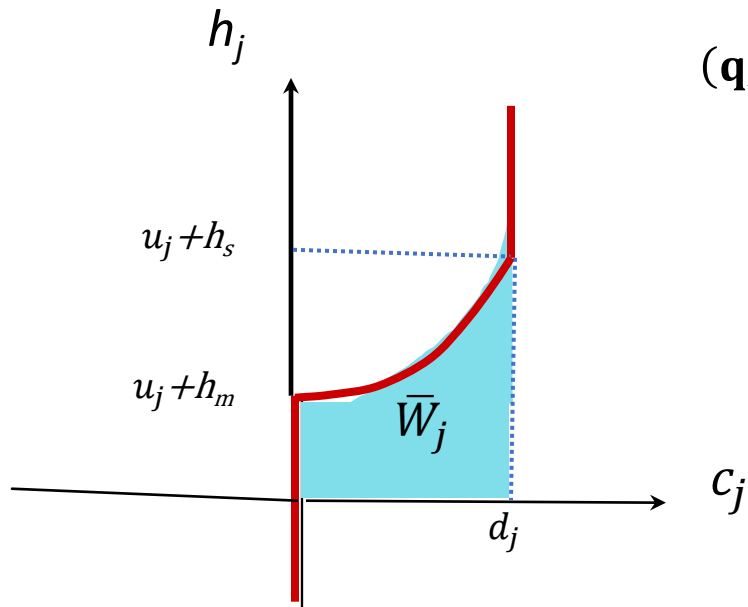

Inverse POR

$$\min_{(\mathbf{q}, \mathbf{c}) \in \mathbb{R}^{n_p + n_j}} C(\mathbf{q}, \mathbf{c}) \stackrel{\text{def}}{=} C(\mathbf{q}) + \sum_{j=1}^{n_d} \bar{W}_j(\mathbf{c}_j)$$


$$s. t. -\mathbf{A}^T \mathbf{q} - \mathbf{S}_d^T \mathbf{c} = \mathbf{0}_{n_j}; \quad \mathbf{0}_{n_d} \leq \mathbf{c} \leq \mathbf{d}$$

The heads in this problem are the equality constraints' Lagrange multipliers (LMs),
Pressure deficit & pressure surplus are the box constraint LMs

Linkflow constraints

Piller et al. (2021)

Elhay et al. (2022)

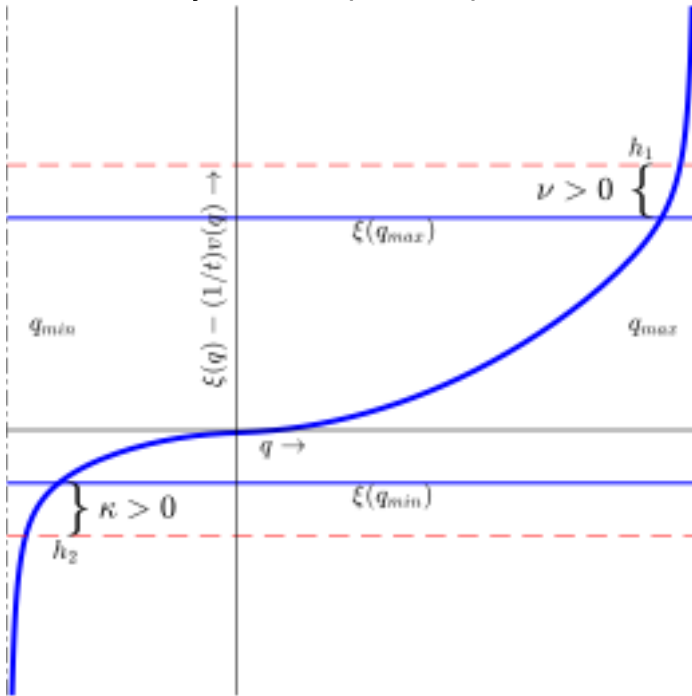

$$\min_{(\mathbf{q}, \mathbf{c}) \in \mathbb{R}^{n_p + n_j}} C(\mathbf{q}, \mathbf{c})$$

$$s.t. -\mathbf{A}^T \mathbf{q} - \mathbf{S}_d^T \mathbf{c} = \mathbf{0}_{n_j}; \quad \mathbf{0}_{n_d} \leq \mathbf{c} \leq \mathbf{d}; \quad \mathbf{q}_{min} \leq \mathbf{q} \leq \mathbf{q}_{max}$$

- ✓ Maximum flow: $q \leq q_{max}$ (FCV)
- ✓ Positivity: $0 \leq q$ (CV)
- ✓ No-flow: $q = 0$ (Closed valve)
- ✓ Minimum flow: $0 \leq q_{min} \leq q$
- ✓ Capacities: $-q_{CAP} \leq q \leq +q_{CAP}$
- ✓ Equality constraints: $q = q_F$


□ LMs for linkflow constraints interprets as additional head loss, or gain loss

Nash equilibrium for local control with PRDs


Deuerlein et al. (2023)

$$\min_{(\mathbf{q}, \mathbf{c}) \in \mathcal{U}} C_Z(\mathbf{q}, \mathbf{c}) \stackrel{\text{def}}{=} C(\mathbf{q}, \mathbf{c}) + \mathbf{q}^T \mathbf{z}$$


$$\min_{z_k > 0} f_k(z_k) \stackrel{\text{def}}{=} \frac{1}{2} (h_{i_k} - \xi(q_k) - z_k - h_{j_k}^s)^2, k = 1, \dots, n_v$$

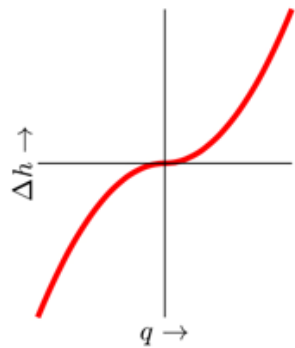

No flow control

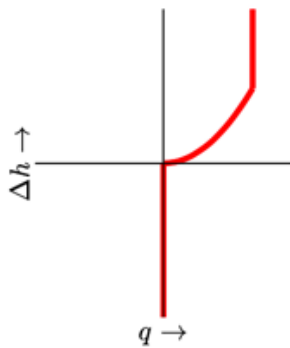

Local flow control

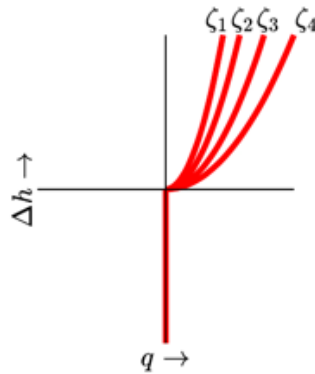

Distributed pressure control

the Nash Equilibrium for a game in which the players are:

- 1) optimization of a system content model
- 2) a separate, local optimization problem for each link with a PRV treating the linkflows and outflows and heads as fixed parameters

KKT equations and Deuerlein et al. solution

$$\xi(\mathbf{q}) - \mathbf{A}\mathbf{h} - \mathbf{a} - \mathbf{L}_q^T \boldsymbol{\kappa} + \mathbf{U}_q^T \boldsymbol{\nu} + \mathbf{L}_v^T \mathbf{z} = \mathbf{0}_{n_p}$$

$$\mathbf{h}_d(\mathbf{c}) - \mathbf{S}_d \mathbf{h} - \mathbf{L}_c^T \boldsymbol{\lambda} + \mathbf{U}_c^T \boldsymbol{\mu} = \mathbf{0}_{n_d}$$

$$-\mathbf{A}^T \mathbf{q} - \mathbf{S}_d^T \mathbf{c} = \mathbf{0}_{n_j}$$

$$-\mathbf{L}_c \mathbf{c} = \mathbf{0}_{n_{c_l}}$$

$$\mathbf{U}_c(\mathbf{c} - \mathbf{d}) = \mathbf{0}_{n_{c_u}}$$

$$-\mathbf{L}_q(\mathbf{q} - \mathbf{q}_{\min}) = \mathbf{0}_{n_{q_l}}$$

$$\mathbf{U}_q(\mathbf{q} - \mathbf{q}_{\max}) = \mathbf{0}_{n_{q_u}}$$

$$\mathbf{S}_s \mathbf{h} - \mathbf{L}_v \xi(\mathbf{q}) - \mathbf{z} + \mathbf{L}_{z_a}^T \boldsymbol{\chi} - \mathbf{h}^s = \mathbf{0}_{n_v}$$

$$-\mathbf{L}_{z_a} \mathbf{z} = \mathbf{0}_{n_{z_a}}$$

$$-\mathbf{c} \leq \mathbf{0}_{n_d}$$

$$\mathbf{c} - \mathbf{d} \leq \mathbf{0}_{n_d}$$

$$-\mathbf{q} + \mathbf{q}_{\min} \leq \mathbf{0}_{n_p}$$

$$-\mathbf{q}_{\max} + \mathbf{q} \leq \mathbf{0}_{n_p}$$

$$-\mathbf{z} \leq \mathbf{0}_{n_v}$$

$$\boldsymbol{\lambda} \geq \mathbf{0}_{n_{c_l}}, \boldsymbol{\mu} \geq \mathbf{0}_{n_{c_u}}, \boldsymbol{\kappa} \geq \mathbf{0}_{n_{q_l}}, \boldsymbol{\nu} \geq \mathbf{0}_{n_{q_u}}, \boldsymbol{\chi} \geq \mathbf{0}_{n_{z_a}}$$

KKT Eqs

Active-Set Method with Newton method

$$\begin{pmatrix} \mathbf{F}_{q_b} & \mathbf{0} & -\mathbf{A}_{b.} & \hat{\mathbf{L}}_{v_b}^T & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{c_b} & -\hat{\mathbf{I}}_{c_b} \mathbf{S}_d & \mathbf{0} & \mathbf{0} \\ -\mathbf{A}_{b.}^T & -\mathbf{S}_d^T \hat{\mathbf{I}}_{c_b}^T & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ -\hat{\mathbf{L}}_{v_b} \mathbf{F}_{q_b} & \mathbf{0} & \mathbf{S}_s & -\mathbf{I} & \mathbf{L}_{z_a}^T \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{L}_{z_a} & \mathbf{0} \end{pmatrix} \begin{pmatrix} \delta \mathbf{q}_b^{(m+1)} \\ \delta \mathbf{c}_b^{(m+1)} \\ \delta \mathbf{h}^{(m+1)} \\ \delta \mathbf{z}^{(m+1)} \\ \delta \boldsymbol{\chi}_{z_a}^{(m+1)} \end{pmatrix} = - \begin{pmatrix} \mathbf{r}_1 \\ \mathbf{r}_2 \\ \mathbf{r}_3 \\ \mathbf{r}_4 \\ \mathbf{r}_5 \end{pmatrix}$$

with



$$\begin{pmatrix} \mathbf{r}_1 \\ \mathbf{r}_2 \\ \mathbf{r}_3 \\ \mathbf{r}_4 \\ \mathbf{r}_5 \end{pmatrix} \stackrel{\text{def}}{=} \begin{pmatrix} \xi_{q_b}^{(m)} + \mathbf{L}_{v_b}^T \mathbf{z}^{(m)} - \mathbf{A}_{b.} \mathbf{h}^{(m)} - \mathbf{a}_{q_b} \\ \mathbf{h}(\mathbf{c}_b^{(m)}) - \mathbf{h}_{c_b}^{(m)} \\ -\mathbf{A}^T \mathbf{q}^{(m)} - \mathbf{S}_d^T \mathbf{c}^{(m)} \\ \mathbf{S}_s \mathbf{h}^{(m)} - \mathbf{L}_v \xi^{(m)} - \mathbf{z}^{(m)} + \mathbf{L}_{z_a}^T \boldsymbol{\chi}_{z_a}^{(m)} - \mathbf{h}^s \\ \mathbf{L}_{z_a} \mathbf{z}^{(m)} \end{pmatrix}$$

Regularization of the Schur matrix

$$\widehat{\mathbf{V}}\delta\mathbf{h}^{(m+1)} = \mathbf{s}_3$$



Where $\widehat{\mathbf{V}} = \mathbf{A}_{\text{b.}}^T \widehat{\mathbf{F}}_{q_b}^{-1} \widehat{\mathbf{A}} + \widehat{\mathbf{I}}_{\text{C}_b}^T \mathbf{M}_{\text{C}_b}^{-1} \widehat{\mathbf{I}}_{\text{C}_b}$

Regularizations from Deuerlein et al. (2023)

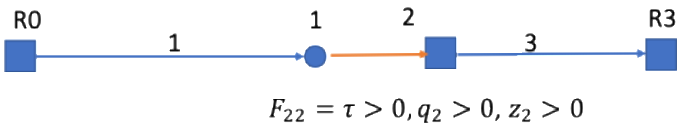

F can be singular, whenever the valve status is active ($q > 0$ and $z > 0$)

Or The Schur complement, $\widehat{\mathbf{V}}$, can become singular if the matrix $\widehat{\mathbf{A}}$ has less than full rank because of the particular membership of the index sets at that point

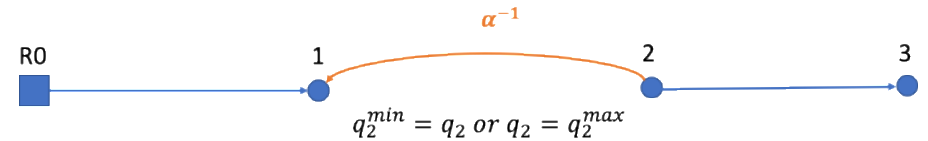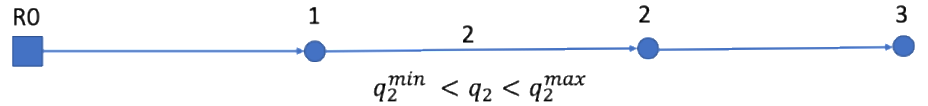




The reduced system system

- Elimination of z and χ in ASM and Newton method
- Reduction conservation energy (partitioning links)
- Conservation of mass (partitioning nodes + node merging)
- Final system Schur


$$-\left(\bar{\mathbf{A}}_b^T \mathbf{F}_{q_{br}}^{-1} \hat{\mathbf{A}}_{b_s} + \mathbf{L}_s \mathbf{S}_d^T \hat{\mathbf{I}}_{c_b}^T \mathbf{M}_{c_b}^{-1} \hat{\mathbf{I}}_{c_b} \mathbf{S}_d \mathbf{L}_s^T\right) \delta \mathbf{h}_s^{(m+1)} =$$

$$-\bar{\mathbf{A}}_b^T \mathbf{F}_{q_{br}}^{-1} \mathbf{v}_1 - \mathbf{L}_s \mathbf{S}_d^T \hat{\mathbf{I}}_{c_b}^T \mathbf{M}_{c_b}^{-1} \mathbf{r}_2 - \mathbf{L}_s \mathbf{r}_3$$

$$\mathbf{V} = \begin{pmatrix} \bar{\mathbf{A}}_b^T & \mathbf{L}_s \mathbf{S}_d^T \hat{\mathbf{I}}_{c_b}^T \\ \mathbf{F}_{q_{br}}^{-1} & \mathbf{M}_{c_b}^{-1} \end{pmatrix} \begin{pmatrix} \hat{\mathbf{A}}_{b_s} \\ \hat{\mathbf{I}}_{c_b} \mathbf{S}_d \mathbf{L}_s^T \end{pmatrix}$$

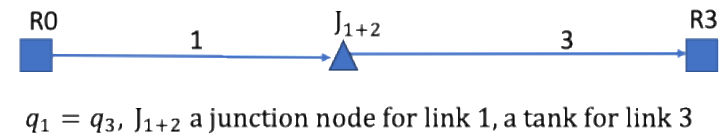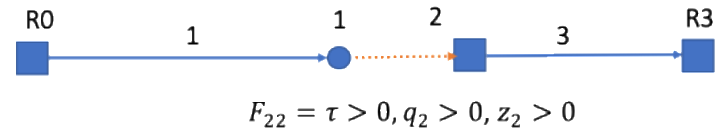

An illustrative example

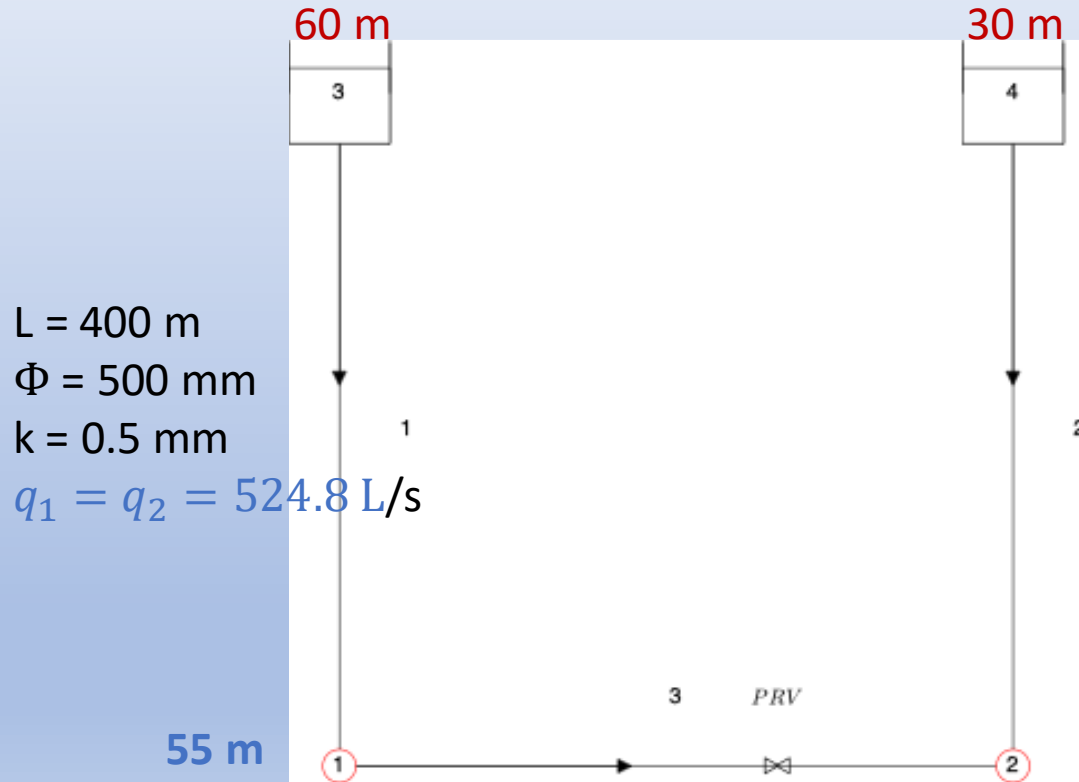

An active PRV example

1. a failure when no regularization is used and initial $\hat{\mathbf{V}}$
2. a slow convergence case when the F-reg is very strict (linear CV & 15 iter.) $\tau = 2 \cdot 10^0$
3. A quadratic convergence case with reduced model or small $\tau = 2 \cdot 10^{-4}$

Conclusions and perspective

- **A general framework suitable for sustainable management of pressures and flow rates is presented**
 - The formulation takes into account min-max constraints for linkflows ($q_{\min} < q < q_{\max}$) and outflows ($0 < c < d$)
 - No heuristics are required to determine the status of the pressure and flow control devices (Nash equilibrium + Lagrange multipliers)
- **A reduced formulation is sought to benefit from Newton's quadratic convergence**
- Future work, finding **rapid and robust algorithms**:
 - Existence & uniqueness
 - impact of graph variations during the iterations? Matrix rank or spanning trees?
 - Relaxation on inappropriate constraints with large networks and a lot of constraints

Thank you for your attention!
Any questions?

Olivier.piller@inrae.fr
deuerlein@3sconsult.de
sylvan.elhay@adelaide.edu.au
angus.simpson@adelaide.edu.au

References

- Cherry, C. (1951). "CXVII. Some general theorems for non-linear systems possessing reactance." *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, 42(333), 1161-1177.
- Collins, M., Cooper, L., Helgason, R., Kennington, J., and LeBlanc, L. (1978). "Solving the Pipe Network Analysis Problem Using Optimization Techniques." *Management Science*, 24(7), 747-760.
- Deuerlein, J. W., Piller, O., Elhay, S., and Simpson, A. R. (2019). "Content-Based Active-Set Method for the Pressure-Dependent Model of Water Distribution Systems." *Journal of Water Resources Planning and Management*, 145(1), 04018082.
- Deuerlein, J. W., Elhay, S., Piller, O., and Simpson, A. R. (2023). "Modeling Flow and Pressure Control in Water Distribution Systems Using the Nash Equilibrium." *Journal of Water Resources Planning and Management*, 149(6), 04023019.
- Elhay, S., Piller, O., Deuerlein, J. W., and Simpson, A. R. (2022). "An Interior Point Method Applied to Flow Constraints in a Pressure-Dependent Water Distribution System." *Journal of Water Resources Planning and Management*, 148(1), 04021090.
- Piller, O., Elhay, S., Deuerlein, J. W., and Simpson, A. R. (2020). "A Content-Based Active-Set Method for Pressure-Dependent Models of Water Distribution Systems with Flow Controls." *Journal of Water Resources Planning and Management*, 146(4), 04020009.