



**HAL**  
open science

## Learning parameters of the Wedelin heuristic with application to crew and bus driver scheduling

Sara Maqrot, Simon De Givry, Marc Tchamitchian, Gauthier Quesnel

► **To cite this version:**

Sara Maqrot, Simon De Givry, Marc Tchamitchian, Gauthier Quesnel. Learning parameters of the Wedelin heuristic with application to crew and bus driver scheduling. 2021. hal-03170397

**HAL Id: hal-03170397**

**<https://hal.inrae.fr/hal-03170397v1>**

Preprint submitted on 16 Mar 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Learning parameters of the Wedelin heuristic with application to crew and bus driver scheduling<sup>☆</sup>

Sara Maqrot<sup>a</sup>, Simon de Givry<sup>a</sup>, Marc Tchamitchian<sup>b</sup>, Gauthier Quesnel<sup>a,\*</sup>

<sup>a</sup>UR 875 MIAT, Université de Toulouse, INRAE, Castanet-Tolosan, France

<sup>b</sup>UR 767 Ecodéveloppement, INRAE, Avignon, France

---

## Abstract

Heuristics are important techniques designed to find quickly good feasible solutions for hard integer programs. Most heuristics depend on a solution of the relaxed linear program. Another approach based on Lagrangian relaxation offers a number of advantages over linear programming, namely it is extremely fast for solving large problems. Wedelin heuristic is such a Lagrangian based heuristic, initially developed to solve airline crew scheduling problems. The performance of this method depends crucially on the choice of its numerous parameters. To adjust them and learn which ones have important influence on whether a solution is found and its quality, we propose to conduct a sensitivity analysis followed by an automatic tuning of the most influential parameters.

We have implemented a C++ open-source solver called *baryonyx* which is a parallel version of a (generalized) Wedelin heuristic. We used the Morris method to find useful continuous parameters. Once found, we fixed other parameters and let a genetic optimization algorithm using derivatives adjust the useful ones in order to get the best solutions for a given time limit and training instance set. Our experimental results done mostly on crew and bus driver scheduling benchmarks tackled as set partitioning problems show the significant improvements obtained by tuning the parameters and the good performances of our approach compared to state-of-the-art exact and inexact integer programming solvers.

*Keywords:* integer programming, heuristics, Lagrangian relaxation, sensitivity analysis, parameter tuning, crew and bus driver scheduling, set partitioning problem  
*2010 MSC:* 90C10, 90C59

---

## 1. Introduction

Heuristics are important techniques designed to find quickly good feasible solutions for hard integer programs. Most heuristics depend on a solution of the relaxed linear program. Another approach based on Lagrangian relaxation offers a number of important

---

<sup>☆</sup>Open-source solver *baryonyx* available at <https://github.com/quesnel/baryonyx>.

\*Corresponding author

Email address: [gauthier.quesnel@inrae.fr](mailto:gauthier.quesnel@inrae.fr) (Gauthier Quesnel)

advantages over linear programming [13], namely it is extremely fast for solving large problems.

Wedelin heuristic [32] is such a Lagrangian based heuristic. Wedelin [33] described the basic principle of the algorithm and its application in the Carmen system for scheduling crew rotations for airlines. Alefragis et al. [2] presented a scalable parallelization of the original algorithm used in the Carmen system. Grohe and Wedelin [15] and [34] introduced a similar algorithm for the max-sum problem. Ernst et al. [12] described a variation of the Wedelin algorithm and applied it to the staff planning problem. Bastert et al. [4] presented many extensions and generalizations of Wedelin algorithm with various improvements. They evaluated the performance of their variant on a set of instances from different sources, where the results were favorable compared to FICO Xpress, a commercial optimization software. Starting from [4], we propose an extension performing multiple runs in parallel.

A major difficulty in the use of optimization methods is the parameter setting. It is important for each problem to find a set of parameter values that leads to optimal performances. Choosing the best values manually requires a lot of experimentation. There are several methods for automatic configuration of parameter values [10, 16]. Eiben et al. [10] classify methods into two categories according to the manner of use, before running the optimization algorithm (parameters tuning) and during its execution (parameter control).

The control methods include self-adjust the parameter values for the resolution and dynamically control these values to improve the solution search. These techniques are widely applied to self-adjust the parameters of evolutionary algorithms [16], such as crossover rate [35], mutation rate [28] and population size [11] for genetic algorithms. These methods can be subdivided into two branches: deterministic and (self-)adaptive [18]. Deterministic methods are based on deterministic rules, which do not change during the execution of the algorithm. Their goal is to calculate approximate values of parameters and adjust them according to the problem [3]. Adaptive methods use information on the current state of the search to change parameter values. Adaptation is effected by changing the objective function, by increasing or decreasing the penalty coefficients for violations of constraints, from one generation to another. This prevents poor settings to conduct future generations [17]. These control methods are developed in an automated framework for setting the parameters of a specific problem (one instance). If the goal is to solve different instances, these methods can be costly in terms of computing time, given the number of parameters and instances.

The principle of parameter tuning methods is simpler. Parameters do not change values during search. They are adjusted before the execution of the algorithm, and remain unchanged after. The settings obtained by learning on a subset of instances is used to solve all instances of a problem. Different parameter tuning strategies exist in the literature and depend on the type of parameters: discrete, continuous or categorical. Two famous examples are CALIBRA [1] and ParamILS [20] parameter tuning methods for the discrete case. They explore the parameter configuration search space using (iterated) local search. CALIBRA limits the number of parameter configuration evaluations using partial statistical designs. ParamILS saves computation time by doing partial evaluations of the training set.

A sensitivity analysis can facilitate parameter tuning by focusing on important parameters for a problem. The goal is to reduce the time and effort in resolving sensitive

parameters. In the literature, the work on the use of both techniques (sensitivity analysis to reduce the parameter search space and automatically adjusting their values) is not much discussed.

Kim et al. [23] perform a sensitivity analysis on the dynamic parameters of sea ice model, using automatic differentiation. Information on the gradient provided by the latter are used in a parameter optimization algorithm based on quasi-Newton method[37]. Teodoro et al. [30] combine sensitivity analysis and automatic parameter tuning for an image segmentation problem. This approach permits to identify the least influential parameters and reduce the parameter configuration search space (100 points instead of trillion points).

In these previous works, parameter tuning is performed for a single instance. In this paper we propose a protocol to generate a universal set of parameter values from a subset of instances of a given problem to be solved by our multi-run Wedelin algorithm. The basic idea is to i) select a subset of instances, ii) investigate the sensitivity of parameters for fixing the values of the non-sensitive parameters to their default values, iii) automatically adjust the values of the significant parameters by black-box optimization, and iv) apply the learned parameter setting on all instances of the problem.

In Section 2, we describe the Wedelin heuristic and our multi-run extension for parallelism. In Section 3, we present our protocol for parameter tuning. In Section 4, we give experimental results and conclude.

## 2. A Parallel Version of Wedelin Heuristic

We are interested in minimizing 0/1 linear programs of the following form:

$$\begin{aligned} \min \quad & cx \\ \text{s.t.} \quad & Ax = b \\ & x \in \{0, 1\}^n \end{aligned}$$

where  $c \in \mathbb{R}^n$  is a vector of  $n$  costs,  $b \in \mathbb{N}^m$  a column vector of constant terms, and  $A \in \{0, 1\}^{m \times n}$  a coefficient matrix for the constraints. In the following, constraint index  $i$  refers to the  $i$ th row in equation  $Ax = b$ , and index  $j$  to the  $j$ th column in  $A$  associated to variable  $x_j$ . Let  $J = \{1, \dots, n\}$  be the set of column indices, and  $J(i) = \{j : a_{ij} = 1\} \subseteq J$  the subset of column indices occurring in constraint  $i$ . Similarly, let  $I = \{1, \dots, m\}$  be the set of row indices, and  $I(j) = \{i : a_{ij} = 1\} \subseteq I$  the subset of constraint indices involving  $x_j$ .

In this paper we adopt an approximate method, called Wedelin algorithm or In-the-middle algorithm. This method is designed for solving linear problems on Boolean variables [32] and uses the Lagrangian relaxation.

### 2.1. The Lagrangian relaxation

The Lagrangian relaxation consists in moving into the objective function all the constraints. These constraints are built into the objective function as linear combinations where the coefficients are Lagrangian multipliers. They penalize the objective function if one of the integrated constraint is violated. This relaxation has the advantage over linear relaxation to directly provide integer solutions and to tackle large size problems.

## 2.2. The Wedelin Heuristic

In this paper, we are particularly interested in a specific heuristic based on the Lagrangian relaxation known as Wedelin heuristic. This method solves linear programming problems with Boolean variables with a specific mathematical form such as the set partitioning problem. This heuristic tries to directly solve the linear problem:

$$\begin{aligned} \min_x \quad & cx - \pi(Ax - b) \\ \text{s.c.} \quad & x \in \{0, 1\}^n \end{aligned} \tag{1}$$

Where  $\pi = \{\pi_1, \pi_2, \dots, \pi_m\} \in \mathbb{R}^m$  represent the Lagrangian multipliers or dual variables. The resolution is trivial when  $\pi_i$  elements in  $\pi$  are fixed to  $\hat{\pi}$ :

$$\begin{aligned} \hat{\pi}b + \min_x \quad & (c - \hat{\pi}A)x \\ \text{s.c.} \quad & x \in \{0, 1\}^n \end{aligned} \tag{2}$$

The solution  $\hat{x}_j$  is constructed with the reduced cost sign with  $(c_j - \hat{\pi}a_j)$  and  $a_j$  the associated column in the coefficient matrix  $A$ .

$$\hat{x}_j = \begin{cases} 1 & \text{if } (c_j - \hat{\pi}a_j) < 0, \\ 0/1 & \text{if } (c_j - \hat{\pi}a_j) = 0, \\ 0 & \text{if } (c_j - \hat{\pi}a_j) > 0. \end{cases} \tag{3}$$

If the reduced cost  $\bar{c} = (c - \hat{\pi}A)$  is non-zero, the solution is unique. However, if one or a few elements of  $\bar{c}$  are zero, it will be difficult to find a feasible solution for the not relaxed problem. The goal of this algorithm is to find a  $\hat{\pi}$  where all elements are non-zero and where the single solution of the relaxed problem is realizable for the primal problem.

We note that the change of the value of a single component  $\hat{\pi}_i$  modifies the values (and signs) of the reduced costs  $\bar{c}$ , and therefore affects the  $\hat{x}$  solution.

The main idea of the Wedelin algorithm (see Algorithm 1) is to consider iteratively a single constraint  $i$ , updating the element  $\hat{\pi}_i$  such that the  $\hat{x}$  vector satisfies the  $i$  constraint of the primal problem. There is always a selection range of  $\hat{\pi}_i$ . The algorithm chooses the value of  $\hat{\pi}_i$  in the middle of this interval. This corresponds to the dual search for descent by coordinates.

Algorithm 1 represents the core of the solver. It takes as input a definition of the problem: the matrix  $A$  and the vectors  $b$  and  $c$ . It expects an output vector of Boolean,  $\hat{x}$ , a solution of the problem. The algorithm starts at line 1 with the construction of an initial  $\hat{x}$  vector which permits to build the list of violated constraints  $R$ . It uses the Bastert et al. [4] proposal to penalize variables with positive costs. The main loop begins at line 2 and run until the loop limit  $p$  and/or the  $\kappa_{\max}$  is reached. For each violated constraints (line 3), it (i) decreases the preferences  $\hat{p}$ , (ii) produces the reduced cost vector  $r$  and sort it according to the reduced costs, (iii) updates the Lagrangian multipliers at line 4, (iv) affects the  $\hat{x}$  vector and the preference matrix  $\hat{p}$ . Finally, at line 6, we update the list of violating constraints and exit with the solution found or adjust the  $\kappa$  adjustment and the iteration  $l$ .

**Input** :  $A \in \{0, 1\}^{m \times n}$ ,  $b \in \mathbb{N}^m$ ,  $c \in \mathbb{R}^n$   
**Output**:  $\hat{x} \in \{0, 1\}^n$  with  $A\hat{x} = b$  and  $c\hat{x}$  small or message no solution

```

1 for  $j \in \{1, \dots, n\}$  do // Build an initial variable assignment
    | if  $c_j \leq 0$  then  $\hat{x}_j \leftarrow 1$ 
    | else  $\hat{x}_j \leftarrow 0$ 
end
Let  $\hat{\pi} \in \mathbb{R}^m$ ,  $\hat{\pi} \leftarrow 0$ ,  $\hat{p} \in \mathbb{R}^{m \times n}$ ,  $\hat{p} \leftarrow 0$ ,  $l \leftarrow 1$ ,  $\kappa \leftarrow \kappa_{min}$ ,
 $R \leftarrow \{i : \sum_{j=1}^n a_{ij}\hat{x}_j \neq b_i\}$  // List of violated constraints
2 while  $l \leq \rho$  and  $\kappa \leq \kappa_{max}$  do
3   for  $i \in R$  do // Update every violated constraint
      | for  $j \in J(i) = \{j : a_{ij} \neq 0\}$  do  $\hat{p}_{ij} \leftarrow \theta \times \hat{p}_{ij}$  // History exp. decay
      | for  $j \in J(i)$  do // Build reduced costs
          |  $r_j \leftarrow c_j - \sum_{i \in I(j)} a_{ij}\hat{\pi}_i - \sum_{i \in I(j)} \hat{p}_{ij}$ 
          end
           $r_{\varphi[1]} < r_{\varphi[2]} < \dots < r_{\varphi[|J(i)|]}$  // Sort variables by increasing red. costs
4          $\hat{\pi}_i \leftarrow \hat{\pi}_i + \frac{1}{2}(r_{\varphi[b_i+1]} + r_{\varphi[b_i]})$  // Update Lagrangian multipliers
          if  $l \leq \omega$  then  $\Delta \leftarrow 0$  // Do not perturb reduced costs during warmup
5         else  $\Delta \leftarrow \frac{\kappa}{1-\kappa}(r_{\varphi[b_i+1]} - r_{\varphi[b_i]}) + \delta$ 
          for  $j \in \{1, \dots, b_i\}$  do // Update variables and preferences positively
              |  $\hat{p}_{i\varphi[j]} \leftarrow \hat{p}_{i\varphi[j]} + \Delta$ ;  $\hat{x}_{\varphi[j]} \leftarrow 1$ 
          end
          for  $j \in \{b_i + 1, \dots, |J(i)|\}$  do // or negatively
              |  $\hat{p}_{i\varphi[j]} \leftarrow \hat{p}_{i\varphi[j]} - \Delta$ ;  $\hat{x}_{\varphi[j]} \leftarrow 0$ 
          end
        end
6    $R \leftarrow \{i : \sum_{j=1}^n a_{ij}\hat{x}_j \neq b_i\}$  // Update the list of violated constraints
      if  $R = \emptyset$  then return  $\hat{x}$  // If empty, exit with solution found
       $\kappa \leftarrow \kappa + \kappa_{step}(\frac{|R|}{m})^\alpha$  // Adaptive adjustment of step size
       $l \leftarrow l + 1$  // Next iteration
end
return no solution found

```

**Algorithm 1:** Wedelin algorithm with local preferences and adaptive step size.

### 2.3. The Parallel Solver *Baryonyx*

In this paper, we introduce a new integer and Boolean linear programming solver called *baryonyx*. This solver is largely based on the algorithms provided in Bastert et al. [4]. We have introduced several modifications to the proposed algorithms to (i) allow the reuse of previous solutions found, (ii) diversify the search, and also (iii) exploit today's symmetric multiprocessor CPUs.

*Baryonyx* accepts two modes: solver and optimizer. In the solver mode, it runs once trying to satisfy all the constraints (the exact implementation of Algorithm 1). In the optimizer mode, it runs in parallel according to the number of processors, and tries to satisfy all the constraints and to optimize the solution at each run, reporting the best solution found for all runs when it reaches its time limit.

The Wedelin heuristic depends only on the  $\delta$  parameter (line 5 in Algorithm 1) to diversify the search. To improve diversification, we develop several random processes (see the technical documentation of *baryonyx*). The most important process of diversification is the initialization mechanism of  $\hat{x}$ . Indeed,  $\hat{x}$  is used to determine violated constraints before any computation. Default, a deterministic initialization is proposed by Bastert et al. [4] where  $\hat{x}_j$  equals 1 if  $c_j \leq 0$  otherwise 0. We propose to extend this part by combining a random process and several different algorithms. We use the Bernoulli's law and its parameter  $p \in [0, 1]$  to provide random Boolean.

random Each  $\hat{x}_i$  are initialized with the Bernoulli law.

bastert For each  $\hat{x}_i$ , either the variable is initialized by the cost variable  $c_i$  (See section 1 in Algorithm 1) or by a random Boolean.

best For each  $\hat{x}_i$ , either the variable is initialized by the best solution found previously  $\hat{x}_i$  or by random Boolean.

Since Wedelin's algorithm runs several times in *baryonyx*, we changed the initialization of  $\hat{x}$  for each iteration. The default *baryonyx* choice is the *best-cycle* policy. It starts with the *bastert* policy. If it fails to find a solution, it restarts with the *random* policy, else it uses the best solution found as initial solution and it tries to improve this solution with the *best* policy three times. If it fails it switches to the first step of the algorithm (*bastert* policy) otherwise it keeps the *best* policy. Figure 1 shows the diagram of the *best-cycle* policy.

To further increase the diversification, we exploit the symmetric multiprocessor CPUs. Each core shares matrices  $A$ , vectors  $b$  and  $c$ . The vector  $\hat{x}$  is local for each process. Each core has its own pseudo-random number generator initialized with different random seed.

### 3. Learning Continuous Parameter Values

In this section, we present our protocol for tuning continuous parameters of Wedelin heuristic automatically.

Algorithm 1 has eleven numerical parameters as described in Table 1. Parameters  $\tau, \Gamma, \rho, \omega$  are integers whereas the others are continuous. We assume a fixed time limit  $\tau$  and a fixed number of cores  $\Gamma$ , and treat the other integer parameters as continuous values

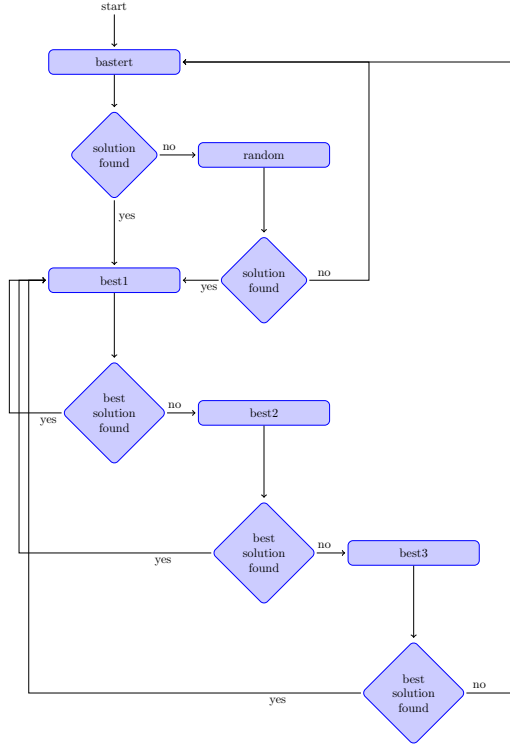


Figure 1: The **best-cycle** algorithm is designed to both improve diversification and to look for a better solution when a solution is found. Each box represents a run of the complete Wedelin algorithm. The solver stops when time limit is reached.

Table 1: **baryonyx** numerical parameters with their typical domain ranges and descriptions.

Parameter	Range	Description
$\tau$	$[1, +\infty[$	CPU time limit (in seconds)
$\Gamma$	$[1, +\infty[$	Number of parallel runs
$\rho$	$[10^2, 10^5]$	Number of iterations inside a run
$\omega$	$[0, 100]$	Number of warmup iterations before using $\kappa$
$\kappa_{min}$	$[0, 0.5]$	Minimum value for $\kappa$ approximation
$\kappa_{step}$	$[10^{-4}, 10^{-2}]$	Step value for $\kappa$ approximation
$\kappa_{max}$	$[0.6, 1]$	Maximum value for $\kappa$ approximation
$\alpha$	$[0, 2]$	Adaptive adjustment of $\kappa$ based on the number of violated constraints [4]
$\delta$	$[10^{-3}, 10^{-1}]$	Random perturbation on reduced costs
$\theta$	$[0, 1]$	Strength of history of local preferences $\hat{p}$ [4]
$p$	$[10^{-4}, 1 - 10^{-4}]$	Bernoulli distribution with success probability $p$



using a rounding function. So, we have nine continuous parameters to tune. The Wedelin heuristic is viewed as a complex function with  $K = 9$  input parameters  $(x_1, \dots, x_K)$  or factors and a single output value  $y(x_1, \dots, x_K)$  which corresponds to the quality of the parameter configuration over a set of training instances. For each benchmark category, we select an evenly distributed subset (20%) of instances to be part of the training set.

### 3.1. Quality of a parameter configuration

The quality of a parameter configuration  $(x_1, \dots, x_K)$  is computed as follow. First, we execute our parallel **baryonyx** solver on every training instance using a modified **Wedelin-Good** configuration<sup>1</sup>. Each execution uses  $\Gamma'$  cores<sup>2</sup> in parallel during  $2\tau$  time limit. We collect the best  $l_e^{init}$  and worst  $u_e^{init}$  solution objective values returned by Algorithm 1 for each instance  $e$ . If no solution is found we remove this instance from the training set. During the training phase, the *normalized* quality of a parameter configuration is obtained from the mean over  $N$  valid training instances of the relative distance gap to the best initial solutions:

$$y(x_1, \dots, x_K) = 1 - \frac{1}{N} \sum_{e=1}^N \frac{l_e - l_e^{init}}{10u_e^{init} - l_e^{init}}$$

If no solution is found for a particular instance and parameter configuration then we assume  $l_e = 10u_e^{init}$ . By multiplying  $u_e^{init}$  by 10, we assume not finding a solution is at least ten times worse than finding a good solution close to the best initial solution. When  $y > 1$ , we have found a better configuration than the modified **WedelinGood** configuration.

### 3.2. Selection of important parameters by sensitivity analysis

We used the Morris method [26, 27] to determine which inputs have important effects on the output. The goal is to discover which parameters are important and cannot be ignored. These parameters will be fine tuned later on (see Section 3.3). For that a factorial sampling plan is built from individually randomized one-factor-at-a-time designs. The Morris method randomly selects  $L$  initial configurations within a regular  $K$ -dimensional  $d$ -level grid. Each parameter is discretized into  $d$  levels including its bounds (given in Table 1). Starting from each initial configuration, a *configuration trace* is constructed by changing the value of one parameter at a time until all the parameters have been modified. The step value is usually chosen as  $\Delta = (d - 1)/2$ . See an example in Figure 2(left). Each trace corresponds to  $K + 1$  configuration evaluations, resulting in a total of  $L \times (K + 1)$  evaluations. The Morris method performs a limited amount of configuration evaluations which is a linear function of the number of parameters  $K$ .

The Morris method provides qualitative sensitivity measures allowing to rank the input factors in order of importance, but not to quantify by how much one given factor is more important than another [27]. In Figure 2(right) we show estimated means ( $\mu_k^* =$

<sup>1</sup>We set  $\alpha = 1$ ,  $p = 0.5$  with the best-cycle strategy, and a randomized order of violated constraints at each iteration.

<sup>2</sup>In our experiments, we used a smaller number of cores  $\Gamma' = 3$  during the training phase than during the test phase ( $\Gamma = 30$ ) in order to save computation time.

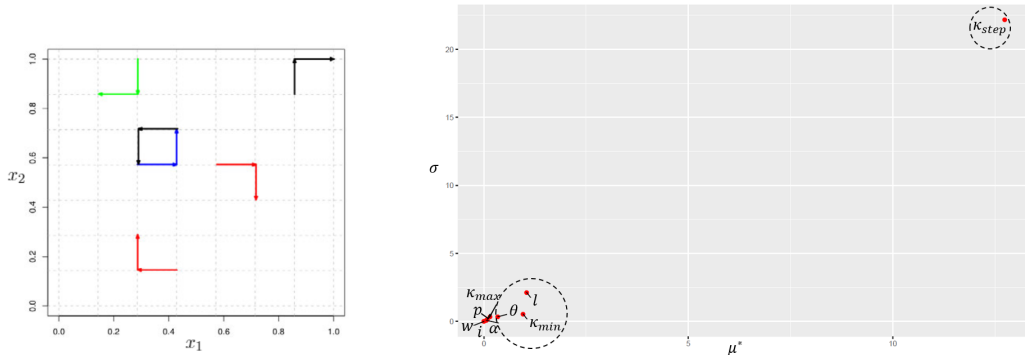


Figure 2: (Left) Example of  $L = 6$  traces in the Morris design for  $K = 2$  parameters discretized into  $d = 8$  levels. The step value here is  $\Delta = 1$ . (Right) Sensitivity measures of the elementary effects for the CSPLib022 benchmark.

$\sum_{l=1}^L |\delta y_k^l|/L$ ) and standard deviations ( $\sigma_k = \sqrt{\sum_{l=1}^L (\delta y_k^l - \mu_k)^2/L}$ ,  $\mu_k = \sum_{l=1}^L \delta y_k^l/L$ ) of the distribution of (absolute values of) elementary effects  $\delta y_k^l$  found by the Morris method for some benchmark category with:

$$\delta y_k^l = \frac{y(x_1, \dots, x_{k-1}, x_k + \Delta, x_{k+1}, \dots, x_K) - y(x_1, \dots, x_k, \dots, x_K)}{\Delta}$$

When  $\mu_k^*$  is large but not  $\sigma_k$ , parameter  $x_k$  has an important overall influence on the output. If both measures are large, it corresponds to a non-linear effect on the output or an input involved in interaction with other factors [27]. This is the case for parameter  $\kappa_{step}$  in Figure 2(right). We use  $\mu_k^*$  to rank the input factors.

In our experiments, we have  $K = 9, L = 50, d = 10$ . We selected the four most important factors,  $\kappa_{min}, \kappa_{step}, \delta, \theta$ , which was the same set of parameters found by the Morris method in all our benchmark categories.

### 3.3. Optimization of Selected Parameter Values

genoud (GENetic Optimization Using Derivatives) [25] is a black-box optimization method for solving nonlinear, nonsmooth, and even discontinuous functions. It combines a genetic algorithm with a quasi-Newton method. The quasi-Newton method is the *Broyden-Fletcher-Goldfarb-Shanno* (BFGS) method [14] using a built-in numerical derivative. It helps to quickly find a local optimum when the current parameter configuration is “in a smooth neighborhood of the local optimum point” [25]. It may also prevent to find the global optimum if used too early or too aggressively. In practice, a number of initial *warmup* generations are explored before BFGS is applied on the best individual in the current population.

genoud starts with a random population including the modified *WedelinGood* configuration. Then, next generations are built from 8 genetic algorithm operators (used in equal proportion) dedicated to continuous parameters: *Cloning, Uniform Mutation, Boundary Mutation, Non-Uniform Mutation, Polytope Crossover, Simple Crossover, Whole Non-Uniform Mutation, and Heuristic Crossover* [25]. For instance, the *Polytope Crossover*

computes a new parameter configuration that is a convex combination of as many individuals as there are parameters to tune.

In our experiments, a (hard) maximum number of 10 generations is performed with a population size of 100. BFGS is applied on the best individual at each generation after the eighth generation. We observed between 803 to 1157 evaluations of the output value  $y$ . It can be more than  $10 \times 100$  due to BFGS evaluations and less because `genoud` will not evaluate the same configuration twice.

#### 4. Experimental Results

`Baryonyx` is a free software (MIT license) in C++17 for solving Boolean and integer linear programming problems. It is provided as a command line program, as a shared library, and has an encapsulation to the R software. Following results were achieved using the version 0.4 of `baryonyx` built with `gcc-7.2`.

The `baryonyx` wrapper for R is called `Rbaryonyx`. It relies on the `rcpp` package to facilitate exchanges between the two libraries. `Rbaryonyx` can read `lp` files, solves the problem and returns a list of solution(s) and solving information data to easily link with other packages such as R `sensitivity` [22] for the Morris method and `rgenoud` [25].

All computations were performed on a cluster of 32-physical-core Intel Xeon CPU E5-2683 v4 at 2.1 GHz and 4 GB of RAM per core. In order to speed up the parameter tuning process, we parallelize the evaluation of the training instances, by taking care that the actual number of executions of `baryonyx` multiplied by  $\Gamma'$  is less than the available number of cores. Depending on the size of the training set, each parameter configuration evaluation took between 1 to 1.5 minute. The Morris method took between 9 to 13 hours per benchmark family. The `genoud` method took from 14 to 28 hours.

In the following, we compare `baryonyx` against IBM ILOG `cplex` version 12.8 and `LocalSolver`<sup>3</sup> version 8.0. `cplex` is a state-of-the-art exact MIP solver. `LocalSolver` is a mathematical programming local search solver using a simulated annealing based on ejection chain moves specialized for maintaining the feasibility of Boolean constraints and an efficient incremental evaluation using a directed acyclic graph [6]. Every solver ran in parallel mode using 30 cores. The solving time limit is 60 seconds (except for VCS where it is 1,800 sec.). `cplex` and `LocalSolver` use their default parameter configurations<sup>4</sup>. `baryonyx` ran with three different static parameter configurations (Supplementary Table .7) plus the one found by `rgenoud` (Supp. Table .8, where the corresponding generation of the best configuration found is also mentioned).

When available, we also report results from other publications [7, 9, 4, 31], but we must treat these results with care as they do not correspond to the same computer, nor time limit, and were obtained on a sequential machine.

All the instances have been preprocessed by `cplex`. A direct translation of 0/1 linear programming `lp` file format into `LocalSolver` `lsp` format has been done.

---

<sup>3</sup><https://www.localsolver.com>

<sup>4</sup>For `cplex`, we set `EPAGAP = EPGAP = EPINT = 0` to avoid premature stop.

#### 4.1. SPP benchmark

This test set consists in 55 instances of airline crew scheduling problems expressed as set partitioning problems. These problems are obtained from the OR-library [5]<sup>5</sup>. SPP instances were provided by four different airline corporations where a subset of these problems was initially solved in [19], and further experimented by other exact [7] and local search methods [8, 31].

These instances are easily solved by `cplex` within the 60-second time limit. The same optimum values were also reported in [7] and [31] (when available). `LocalSolver` could not find a solution on four instances, whereas all `baryonyx` configurations always found a solution. Using default or optimized by `genoud` configurations were the best options, respectively at 0.06% and 0.01% to the optimum.

Table 2: Computational results (relative distance to best-known solutions for solved instances and in parentheses number of solved instances) on SPP instances [5].

Instances	BARYONYX				CPLEX	Local-Solver	[7]	[31]
	DEFAULT	FAST	GOOD	GENOUD				
aa	0.23 %	0.80 %	1.19%	0.08%	0.00%	23.02%	0.00%	1.64%
(6)	(6)	(6)	(6)	(6)	(6)	(3)	(6)	(6)
us	0.09 %	1.48%	2.60%	0.02%	0.00%	0.00%	0.00%	0.04%
(4)	(4)	(4)	(4)	(4)	(4)	(3)	(4)	(4)
nw	0.00%	2.64%	3.96%	0.00%	0.00%	8.53%	0.00%	
(43)	(43)	(43)	(43)	(43)	(43)	(43)	(43)	N/A
kl	0.69%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	
(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	N/A
Mean	0.06%	2.26%	3.41%	0.01%	<b>0.00%</b>	8.54%	<b>0.00%</b>	
(55)	(55)	(55)	(55)	(55)	(55)	(51)	(55)	N/A

#### 4.2. Telebus benchmark

Telebus<sup>6</sup> [7] is a scheduling problem to program tour vehicles for disabled persons in Berlin. The goal is to provide a one-off service with minimum costs, while respecting a set of constraints, such as vehicle capacity and mandatory breaks. The problem was modeled in two steps. The first step, “clustering”, identifies all possible bus circuits that can carry several people at a time. The goal is to select a set of controls with a minimal vehicle travel distance. In the second step, “chaining”, the selected commands are chained to generate bus circuits that respect all the constraints. The objective is to minimize the total distance traveled by the vehicles. These two steps represent 28 instances of set partitioning problems divided into two equal-size subfamilies (14 v/clustering, 14 t/chaining) corresponding to different periods in the year 1996. t/chaining instances are more difficult than v/clustering instances and their optimum is mostly unknown (except for t0415, t0420, t0421).

`cplex` solved all v/clustering and t0415 instances within the time limit, doing slightly better than the original branch-and-cut method of [7] and the 4-flip neighborhood local search algorithm of [31]. `baryonyx` and `LocalSolver` were a few percent below.

<sup>5</sup><http://people.brunel.ac.uk/~mastjjb/jeb/orlib/sppinfo.html>

<sup>6</sup>[http://www.zib.de/opt-long\\_projects/TrafficLogistics/Telebus/index.en.html](http://www.zib.de/opt-long_projects/TrafficLogistics/Telebus/index.en.html)

`baryonyxrgn` performed extremely well on t/chaining instances, obtaining the best results among all tested methods except on three instances where `cplex` and 4-flip local search found better solutions. In particular, for two open instances (t1717/t1722), it improved MIPLIB 2017 best reported solutions (from 184271/114245 to 165881/167523).

Looking at our training set, we observed it does not include any v-instances because the initial modified `WedelinGood` evaluation (see Section 3.1) failed to produce any solutions.

Table 3: Computational results (relative distance to best-known solutions for solved instances and in parentheses number of solved instances) on telebus instances [7].

Instances	BARYONYX				CPLEX	Local-Solver	[7]	[31]
	DEFAULT	FAST	GOOD	GENOUD				
v0415-0421	0.14%	0.12%	0.11%	0.30%	0.00%	0.04%	0.00%	0.00%
(7)	(7)	(7)	(7)	(7)	(7)	(7)	(7)	(7)
v1616-1622	0.43%	1.08%	1.45%	1.43%	0.00%	6.21%	0.01%	0.09%
(7)	(7)	(7)	(7)	(7)	(7)	(7)	(7)	(7)
t0415-0421	0.02 %	0.01 %	0.03%	0.03%	0.61%	(7)	1.88%	0.95%
(7)	(7)	(7)	(7)	(7)	(7)	(0)	(7)	(6)
t1716-1722	16.05%	30.37%	9.29%	0.00%	11.19%	150.25%	9.70%	10.71%
(7)	(7)	(7)	(7)	(7)	(7)	(4)	(7)	(7)
Mean	4.16%	7.89%	2.72%	<b>0.44%</b>	2.95%	35.82%	2.90%	3.01%
(28)	(28)	(28)	(28)	(28)	(28)	(18)	(28)	(27)

We also compared our solver using `WedelinFast` and `WedelinGood` static configurations with the original version developed by Bastert [4]. Our methods were able to find a solution for all the instances whereas the original approach could not for at least six instances. It demonstrates the robustness of doing multiple runs in parallel compared to a single run (using a longer 600-second time limit) as done in [4].

#### 4.3. CSPLib022 benchmark

CSPLib022<sup>7</sup> is a library of 12 bus driver scheduling problems reformulated as set partitioning problems. The problems come from different bus companies: Reading (r1 to r5a), Centre West Ealing area (c1, c1a, c2), the former London Transport (t1 and t2). These problems are relatively small and easy. `cplex` took less than 7.7 seconds to solve its most difficult instance c1a. `baryonyxrgn` found all the optima in less than 2.2 seconds (solving time) for the largest instance r3. `LocalSolver` did not find the optimum for this instance, neither found a solution for two other instances. The iterative repair local search method GENET [9] got the worst results.

#### 4.4. VCS benchmark

VCS instances are randomly generated bus and driver scheduling problems. VCS1200 is a medium-size instance ( 1, 200 constraints, 130, 000 variables), and VCS1600 is a large problem ( 1, 600 constraints, 500, 000 variables) [36].

With a 1, 800-second time limit, `cplex` did not find any integral solution for the largest instance whereas `baryonyx` with its default setting or the one found by `genoud` produced

<sup>7</sup><http://www.csplib.org/Problems/prob022>

Table 4: Computational results (relative distance to best-known solutions for solved instances and in parentheses number of solved instances) on CSPLib022 instances [29].

Instances	baryonyx				cplex	LocalSolver	[9]
	DEFAULT	FAST	GOOD	GENOUD			
CSPLib022 (12)	6.87% (12)	<b>0.00%</b> (12)	<b>0.00%</b> (12)	<b>0.00%</b> (12)	<b>0.00%</b> (12)	1.54% (10)	26.24% (8)

relatively good solutions (5.3% to the optimum for VCS1600). A first solution at 5.7% to the optimum for VCS1600 was found by default **baryonyx** in 280 seconds (solving time).

Table 5: Computational results (relative distance to best-known solutions for solved instances and in parentheses number of solved instances) on VCS instances [36].

Instances	baryonyx				CPLEX
	DEFAULT	FAST	GOOD	GENOUD	
VCS (2)	9.25% (2)	(0)	(0)	<b>7.32%</b> (2)	12.68% (1)

In order to find the optimum values, we also ran **cplex** without any time limit. It took 1 hour for VCS1200 and 4.3 hours for VCS1600 to be solved to optimality by **cplex** version 12.7.1 on a 4-core Intel CPU i7-4600U at 2.1 GHz.

#### 4.5. Nqueens benchmark

Nqueens<sup>8</sup> instances represent the weighted n-queen problem where the goal is to place  $n$  queens on a chessboard  $n \times n$  so that none of them attack each other (exactly one queen in each row and each column, at most one queen in each ascending diagonal and each descending diagonal). There are  $n^2$  0/1 variables  $x_{i,j}$ . The objective function is to minimize  $\sum_{i,j} c_{i,j} x_{i,j}$  with  $c_{i,j}$  a random value uniformly sampled from  $[1, n]$ . The largest instance among 8 has 1 million variables.

This problem combines set partitioning linear constraints (for rows and columns) and set packing linear constraints (for diagonals). It shows the ability of **baryonyx** to tackle efficiently a larger class of integer linear programs, with better results than **cplex** and **LocalSolver** thanks to parameter tuning by **genoud**.

Table 6: Computational results (relative distance to best-known solutions for solved instances and in parentheses number of solved instances) on nqueens instances.

Instances	baryonyx				CPLEX	LOCALSOLVER
	DEFAULT	FAST	GOOD	GENOUD		
nqueens (8)	4.33% (6)	8.11% (7)	5.44% (8)	<b>0.61%</b> (8)	453.26% (8)	36.34% (8)

<sup>8</sup><https://forgemia.inra.fr/thomas.schiex/cost-function-library/tree/master/random/wqueens>

## 5. Conclusion

`baryonyx` is a parallel multi-start meta-heuristic which offers good results on large crew and bus driver scheduling problems expressed as set partitioning problems in a relatively short amount of time. It can be used just after preprocessing to provide a good initial upper bound for a complete branch-and-bound solver. Depending on the usage context and time available, when off-line tuning of the parameters is allowed, we show a methodological process to select the important factors and optimize them. Even using a small training set, we could significantly improve the results. This methodology is readily available as supplementary R scripts next to `baryonyx` source code. Concerning the comparison with the other solvers, it is important to note that we did not try to tune their parameters and better results could be obtained as reported in [21]. Concerning the set partitioning problems (all our benchmarks except `nqueens`), more preprocessing rules could be applied. We made some preliminary experiments with set covering problems but the results were not as good as with set partitioning or set packing problems. It remains as future work to evaluate our solver on a larger set of benchmarks.

We plan to exploit the Lagrangian multipliers to give dual bound information which could make our solver exact in some cases, a feature already available in `LocalSolver` using linear relaxation. Dealing with a quadratic objective function as done in [15] is also an important topic we would like to work on and apply to planning problems in agronomy [24].

**Acknowledgments.** We are grateful to the GenoToul (Toulouse) Bioinformatic platform for providing us computational support for this work.

## References

- [1] Belarmino Adenso-Diaz and Manuel Laguna. Fine-tuning of algorithms using fractional experimental designs and local search. *Operations research*, 54(1):99–114, 2006.
- [2] Panayiotis Alefragis, Peter Sanders, Tuomo Takkula, and Dag Wedelin. Parallel integer optimization for crew scheduling. *Annals of Operations Research*, 99(1-4):141–166, 2000.
- [3] Laura Barbulescu, Jean-Paul Watson, and L. Darrell Whitley. Dynamic representations and escaping local optima: Improving genetic algorithms and local search. *AAAI/IAAI*, 2000:879–884, 2000.
- [4] Olivier Bastert, Benjamin Hummel, and Sven de Vries. A generalized Wedelin heuristic for integer programming. *INFORMS Journal on Computing*, 22(1):93–107, 2010.
- [5] J. E. Beasley. Or-library: distributing test problems by electronic mail. *The Journal of the Operational Research Society*, 41:1069–1072, 1990.
- [6] Thierry Benoist, Bertrand Estellon, Frédéric Gardi, Romain Megel, and Karim Nouioua. Localsolver 1. x: a black-box local-search solver for 0-1 programming. *4OR: A Quarterly Journal of Operations Research*, 9(3):299–316, 2011.
- [7] Ralf Borndörfer. *Aspects of set packing, partitioning, and covering*. PhD thesis, Berlin, Techn. Univ., 1998.
- [8] P. C. Chu and J. E. Beasley. A genetic algorithm for the set partitioning problem. *Imperial College, London*, 1995.
- [9] Suniel D Curtis, Barbara M Smith, and Anthony Wren. Constructing driver schedules using iterative repair, 2000. Presented at The Practical Application of Constraint Technologies and Logic Programming Conference (PACLP’2000).
- [10] Ágoston E. Eiben, Robert Hinterding, and Zbigniew Michalewicz. Parameter control in evolutionary algorithms. *IEEE Transactions on evolutionary computation*, 3(2):124–141, 1999.
- [11] Ágoston Endre Eiben, Elena Marchiori, and V. A. Valko. Evolutionary algorithms with on-the-fly population size adjustment. In *International Conference on Parallel Problem Solving from Nature*, pages 41–50. Springer, 2004.

- [12] Andreas Ernst, Houyuan Jiang, and Mohan Krishnamoorthy. A new Lagrangian heuristic for the task allocation problem. In *Industrial Mathematics*, pages 137–158. Oxford, 2006.
- [13] Marshall L. Fisher. The Lagrangian relaxation method for solving integer programming problems. *Management science*, 50(12supp.):1861–1871, 2004.
- [14] PE Gill, W Murray, and MH Wright. *Practical Optimization*. Academic Press, San Diego, 1981.
- [15] Birgit Grohe and Dag Wedelin. Cost Propagation–Numerical Propagation for Optimization Problems. In *International Conference on Integration of Artificial Intelligence (AI) and Operations Research (OR) Techniques in Constraint Programming*, pages 97–111. Springer, 2008.
- [16] Youssef Hamadi. Autonomous search. In *Combinatorial Search: From Algorithms to Systems*, pages 99–122. Springer, 2013.
- [17] Georges R. Harik and Fernando G. Lobo. A parameter-less genetic algorithm. In *Proceedings of the 1st Annual Conference on Genetic and Evolutionary Computation-Volume 1*, pages 258–265. Morgan Kaufmann Publishers Inc., 1999.
- [18] Robert Hinterding, Zbigniew Michalewicz, and Agoston E. Eiben. Adaptation in evolutionary computation: A survey. In *Evolutionary Computation, 1997., IEEE International Conference on*, pages 65–69. IEEE, 1997.
- [19] Karla L. Hoffman and Manfred Padberg. Solving airline crew scheduling problems by branch-and-cut. *Management science*, 39(6):657–682, 1993.
- [20] Frank Hutter, Holger H. Hoos, and Thomas Stützle. Automatic algorithm configuration based on local search. In *AAAI*, volume 7, pages 1152–1157, Vancouver, Canada, 2007.
- [21] Frank Hutter, Holger H. Hoos, and Kevin Leyton-Brown. Automated configuration of mixed integer programming solvers. In *International Conference on Integration of Artificial Intelligence (AI) and Operations Research (OR) Techniques in Constraint Programming*, pages 186–202. Springer, 2010.
- [22] Bertrand Iooss and Paul Lemaître. A review on global sensitivity analysis methods. In *Uncertainty Management in Simulation-Optimization of Complex Systems*, pages 101–122. Springer, 2015.
- [23] Jong G. Kim, Elizabeth C. Hunke, and William H. Lipscomb. Sensitivity analysis and parameter tuning scheme for global sea-ice modeling. *Ocean Modelling*, 14(1):61–80, 2006.
- [24] Sara Maqrot, Simon de Givry, Gauthier Quesnel, and Marc Tchamitchian. A Mixed Integer Programming Reformulation of the Mixed Fruit-Vegetable Crop Allocation Problem. In *Advances in Artificial Intelligence: From Theory to Practice*, Lecture Notes in Computer Science, pages 237–250. Springer, Cham, June 2017.
- [25] Walter R. Mebane and Jasjeet Singh Sekhon. R version of genetic optimization using derivatives, version 5.8-2.0, 2012.
- [26] Max D. Morris. Factorial sampling plans for preliminary computational experiments. *Technometrics*, 33(2):161–174, 1991.
- [27] A. Saltelli, S. Tarantola, F. Campolongo, and M. Ratto. *Sensitivity Analysis in Practice: A Guide to Assessing Scientific Models*. John Wiley and Sons, 2004.
- [28] Jim Smith and Terence C. Fogarty. Self adaptation of mutation rates in a steady state genetic algorithm. In *Evolutionary Computation, 1996., Proceedings of IEEE International Conference on*, pages 318–323. IEEE, 1996.
- [29] Curtis Suniel. CSPLib problem 022: Bus driver scheduling, 1999.
- [30] George Teodoro, Tahsin M. Kurç, Luís FR Taveira, Alba CMA Melo, Yi Gao, Jun Kong, and Joel H. Saltz. Algorithm sensitivity analysis and parameter tuning for tissue image segmentation pipelines. *Bioinformatics*, 33(7):1064–1072, 2016.
- [31] Shunji Umetani. Exploiting variable associations to configure efficient local search algorithms in large-scale binary integer programs. *European Journal of Operational Research*, 263:72–81, 2017.
- [32] Dag Wedelin. An algorithm for large scale 0/1 integer programming with application to airline crew scheduling. *Annals of operations research*, 57(1):283–301, 1995.
- [33] Dag Wedelin. The design of a 0/1 integer optimizer and its application in the Carmen system. *European Journal of Operational Research*, 87(3):722–730, 1995.
- [34] Dag Wedelin. Revisiting the in-the-middle algorithm and heuristic for integer programming and the max-sum problem. *preprint*, 2013.
- [35] Shengxiang Yang and Bedau Abbass. Adaptive crossover in genetic algorithms using statistics mechanism. *Artificial Life*, 8:182–185, 2003.
- [36] A. Zaghroui, F. Soumis, and I. El Hallaoui. Integral simplex using decomposition for the set partitioning problem. *Operations Research*, 62:435–449, 2014.
- [37] Ciyou Zhu, Richard H. Byrd, Peihuang Lu, and Jorge Nocedal. Algorithm 778: L-BFGS-B: Fortran subroutines for large-scale bound-constrained optimization. *ACM Transactions on Mathematical Software (TOMS)*, 23(4):550–560, 1997.



Table .7: Static parameter configurations for `baryonyx`.

Parameters	Configurations		
	WedelinFast	WedelinGood	baryonyx default
$\tau$	60 seconds (1800 for VCS)		
$\Gamma$	30 parallel runs (only 3 for training)		
$\rho$	$10^5$ iterations		
$\omega$	20 warmup iterations		
$\kappa_{min}$	0		
$\kappa_{step}$	$10^{-3}$	$2 \times 10^{-4}$	$10^{-3}$
$\kappa_{max}$	0.6		
$\alpha$	0		1
$\delta$	0.01		$(1 - \theta) \frac{\min_{j=1}^n  c_j , c_j \neq 0}{\max_{j=1}^n  c_j }$
$\theta$	0.4	0.6	0.5
$p$	0		0.5
<i>Violated constraint order</i>	<i>none</i>		<i>random</i>
<i>Initialization policy</i>	<i>bastert</i>		<i>best-cycle</i>

Table .8: Learnt parameter configurations for `baryonyxrgn`. Remaining parameters use `baryonyx` default configuration. After every benchmark name, we put between square brackets the generation number where this configuration has been found by `rgenoud`.

	<code>baryonyx<sup>rgn</sup></code>			
	$\kappa_{min}$	$\kappa_{step}$	$\delta$	$\theta$
SPP (VCS) [10]	0.00	$1.88 \times 10^{-4}$	$3.19 \times 10^{-3}$	$2.85 \times 10^{-1}$
telebus [1]	$1.05 \times 10^{-1}$	$4.10 \times 10^{-4}$	$1.13 \times 10^{-2}$	$3.54 \times 10^{-1}$
CSPLib022 [0]	0.00	$2.00 \times 10^{-4}$	$1.00 \times 10^{-2}$	$6.00 \times 10^{-1}$
nqueens [1]	$3.37 \times 10^{-2}$	$7.45 \times 10^{-3}$	$9.04 \times 10^{-3}$	$7.89 \times 10^{-1}$

Table 9: Computational results (objective value) on SPP instances (in bold: training set and best solutions, "-": no solution found)

Instances	Columns	Rows	baronyx	WEDLINFAST	WEDLINGood	baronyx <sup>7.9n</sup>	cpkx	LocalSolver	Beasley[5]	Umetani[31]
sppaa01	7564	614	56255	57439	57396	56178	56137	-	56137	56137
sppaa02	3875	362	<b>30494</b>	<b>30494</b>	<b>30494</b>	<b>30494</b>	<b>30494</b>	<b>30494</b>	<b>30494</b>	<b>30494</b>
sppaa03	6776	561	49695	49876	50213	49649	49649	-	49649	49649
sppaa04	6139	343	26518	26636	27007	26485	26374	44591	26374	26374
sppaa05	6269	536	54012	54368	54307	53839	53839	-	53839	53839
sppaa06	5963	510	27093	27069	27176	27040	27040	-	27040	27040
sppaw01	50069	135	<b>114852</b>	<b>114852</b>	<b>115336</b>	<b>114852</b>	<b>114852</b>	<b>114852</b>	<b>114852</b>	N/A
sppaw02	85258	145	<b>105444</b>	<b>105684</b>	<b>107934</b>	<b>105444</b>	<b>105444</b>	202986	<b>105444</b>	N/A
sppaw03	38956	53	<b>24492</b>	26517	27363	<b>24492</b>	<b>24492</b>	36402	<b>24492</b>	N/A
sppaw04	46189	35	<b>16862</b>	19036	18004	<b>16862</b>	<b>16862</b>	27610	<b>16862</b>	N/A
sppaw05	202593	62	132950	133180	133376	132920	<b>132878</b>	142110	<b>132878</b>	N/A
sppaw06	5956	38	<b>7810</b>	8592	9392	<b>7810</b>	<b>7810</b>	<b>7810</b>	<b>7810</b>	N/A
sppaw07	3105	34	<b>5476</b>	6200	6200	<b>5476</b>	<b>5476</b>	<b>5476</b>	<b>5476</b>	N/A
sppaw08	352	21	<b>35894</b>	<b>35894</b>	<b>35894</b>	<b>35894</b>	<b>35894</b>	<b>35894</b>	<b>35894</b>	N/A
sppaw09	2301	38	<b>67760</b>	<b>67760</b>	68402	<b>67760</b>	<b>67760</b>	<b>67760</b>	<b>67760</b>	N/A
sppaw10	655	21	<b>68271</b>	68286	68286	<b>68271</b>	<b>68271</b>	<b>68271</b>	<b>68271</b>	N/A
sppaw11	6482	34	<b>116256</b>	116856	117651	116259	<b>116256</b>	<b>116256</b>	<b>116256</b>	N/A
sppaw12	451	25	14118	14124	14190	14118	14118	14118	14118	N/A
sppaw13	10903	50	<b>50146</b>	50158	51934	<b>50146</b>	<b>50146</b>	<b>50146</b>	<b>50146</b>	N/A
sppaw14	95172	70	61846	62046	62452	61850	61844	61844	61844	N/A
sppaw15	441	29	<b>67743</b>	67746	67746	<b>67743</b>	<b>67743</b>	<b>67743</b>	<b>67743</b>	N/A
sppaw16	138947	135	<b>1181590</b>	1181638	<b>1181590</b>	<b>1181590</b>	<b>1181590</b>	<b>1181590</b>	<b>1181590</b>	N/A
sppaw17	78173	54	11115	13698	13083	11115	11115	27546	11115	N/A
sppaw18	8438	108	340162	341518	343538	340160	340160	340160	340160	N/A
sppaw19	2134	32	<b>10898</b>	11888	11888	<b>10898</b>	<b>10898</b>	<b>10898</b>	<b>10898</b>	N/A
sppaw20	536	22	<b>16812</b>	17556	17556	<b>16812</b>	<b>16812</b>	<b>16812</b>	<b>16812</b>	N/A
sppaw21	426	25	<b>7408</b>	7408	7436	<b>7408</b>	<b>7408</b>	<b>7408</b>	<b>7408</b>	N/A
sppaw22	521	23	<b>6984</b>	7144	7244	<b>6984</b>	<b>6984</b>	<b>6984</b>	<b>6984</b>	N/A
sppaw23	473	19	<b>12534</b>	12534	12534	<b>12534</b>	<b>12534</b>	<b>12534</b>	<b>12534</b>	N/A
sppaw24	926	19	6314	6568	6568	6314	6314	6314	6314	N/A
sppaw25	844	20	<b>5960</b>	<b>5960</b>	6286	<b>5960</b>	<b>5960</b>	<b>5960</b>	<b>5960</b>	N/A
sppaw26	516	23	<b>6796</b>	<b>6796</b>	<b>6796</b>	<b>6796</b>	<b>6796</b>	<b>6796</b>	<b>6796</b>	N/A
sppaw27	817	22	<b>9933</b>	<b>9933</b>	11091	<b>9933</b>	<b>9933</b>	<b>9933</b>	<b>9933</b>	N/A
sppaw28	599	18	<b>8298</b>	<b>8298</b>	<b>8298</b>	<b>8298</b>	<b>8298</b>	<b>8298</b>	<b>8298</b>	N/A
sppaw29	2034	18	<b>4274</b>	4392	4666	<b>4274</b>	<b>4274</b>	<b>4274</b>	<b>4274</b>	N/A
sppaw30	1884	26	<b>3942</b>	4450	4294	<b>3942</b>	<b>3942</b>	<b>3942</b>	<b>3942</b>	N/A
sppaw31	1823	26	<b>8038</b>	8484	8106	<b>8038</b>	<b>8038</b>	<b>8038</b>	<b>8038</b>	N/A
sppaw32	227	15	<b>14877</b>	<b>14877</b>	15120	<b>14877</b>	<b>14877</b>	<b>14877</b>	<b>14877</b>	N/A
sppaw33	2415	23	<b>6678</b>	6724	6724	<b>6678</b>	<b>6678</b>	<b>6678</b>	<b>6678</b>	N/A
sppaw34	736	20	<b>10488</b>	<b>10488</b>	10701	<b>10488</b>	<b>10488</b>	<b>10488</b>	<b>10488</b>	N/A
sppaw35	1403	23	<b>7216</b>	7316	7216	<b>7216</b>	<b>7216</b>	<b>7216</b>	<b>7216</b>	N/A
sppaw36	1408	20	<b>7314</b>	7824	8272	<b>7314</b>	<b>7314</b>	<b>7314</b>	<b>7314</b>	N/A
sppaw37	639	19	<b>10068</b>	10233	<b>10068</b>	<b>10068</b>	<b>10068</b>	<b>10068</b>	<b>10068</b>	N/A
sppaw38	908	21	<b>5558</b>	5688	5592	<b>5558</b>	<b>5558</b>	<b>5558</b>	<b>5558</b>	N/A
sppaw39	565	25	<b>10080</b>	<b>10080</b>	10758	<b>10080</b>	<b>10080</b>	<b>10080</b>	<b>10080</b>	N/A
sppaw40	336	19	<b>10809</b>	10848	10896	<b>10809</b>	<b>10809</b>	<b>10809</b>	<b>10809</b>	N/A
sppaw41	177	17	<b>11307</b>	<b>11307</b>	11766	<b>11307</b>	<b>11307</b>	<b>11307</b>	<b>11307</b>	N/A
sppaw42	893	22	<b>7656</b>	7684	7684	<b>7656</b>	<b>7656</b>	<b>7656</b>	<b>7656</b>	N/A
sppaw43	892	17	<b>8904</b>	9012	9012	<b>8904</b>	<b>8904</b>	<b>8904</b>	<b>8904</b>	N/A
sppkl01	5957	47	1091	1091	<b>1086</b>	<b>1086</b>	<b>1086</b>	<b>1086</b>	<b>1086</b>	N/A
sppas01	16542	69	221	<b>219</b>	<b>219</b>	<b>219</b>	<b>219</b>	<b>219</b>	<b>219</b>	N/A
sppas02	351018	86	10051	10176	10101	10038	10036	-	10036	10036
sppas03	8433	45	5977	6015	6316	5965	5965	5965	5965	5965
sppas04	23207	50	<b>5338</b>	5544	5544	<b>5338</b>	<b>5338</b>	<b>5338</b>	<b>5338</b>	5338
sppas04	4422	98	<b>17854</b>	<b>17854</b>	<b>17854</b>	<b>17854</b>	<b>17854</b>	<b>17854</b>	<b>17854</b>	<b>17854</b>

Table 10: Computational results (objective value) on telebus instances (in bold: training set and best solutions, "-": no solution found)

Instances	Columns	Rows	BARTORYX									
			baronyx	WedlinFast	WedlinGood	baronyx <sup>7/7n</sup>	plex	LocalSolver	Borndörfer[7]	Umetani[31]	Bestert <sup>†</sup> [4]	WedlinGood
<b>60415</b>	3172	870	5346798	<b>5399422</b>	5346625	5346798	<b>5399422</b>	-	5390096	5572626	-	5593005
60416	3152	974	<b>6085264</b>	<b>6085264</b>	<b>6085264</b>	<b>6085264</b>	6093843	-	6130271	<b>6085264</b>	-	6095736
60417	3623	897	5955570	5955570	5955570	5955570	6043157	-	6043157	6024760	-	6034848
60418	3921	999	<b>6442906</b>	<b>6442906</b>	<b>6442906</b>	6447871	6442908	-	6350898	6446019	-	6470351
60419	3168	904	5908538	5908538	5908538	5908538	5916996	-	5916996	5910913	-	5910913
<b>60420</b>	1847	562	<b>4153696</b>	<b>4153696</b>	<b>4153696</b>	<b>4153696</b>	4276444	-	4276444	-	-	-
60421	1656	557	<b>4290809</b>	<b>4290809</b>	<b>4290809</b>	4290809	4340929	-	4354411	-	-	-
61716	11952	467	173161	220247	171481	<b>146871</b>	169429	330789	161636	165972	181488	306453
61717	16428	551	192123	196599	178810	190181	162892	397845	162892	180757	199024	178948
61718	16310	523	178772	206736	164318	159166	169806	-	162892	174338	197136	175517
<b>61719</b>	15846	556	199103	223397	189027	<b>167523</b>	187677	474975	187677	184354	213194	200215
61720	16195	538	183660	217848	176376	<b>154881</b>	175643	-	172752	181868	183673	188880
61721	9043	357	136647	134842	128337	<b>117602</b>	123567	296830	127424	130047	154951	188819
61722	6581	338	128574	136612	118832	<b>113213</b>	123567	296830	123567	130047	154951	188819
60415	4012	598	2431155	2432482	2432378	2436076	121025	-	122472	114508	2429568	2450287
60416	10723	812	2732616	2730395	2731091	2739534	2429420	2726930	<b>2725602</b>	2726156	2434157	2450287
60417	55232	715	2619345	2613689	2615766	2624641	2726930	2617710	<b>2611518</b>	2726156	2731356	2737662
60418	4411	742	2847522	2847305	2847073	2852267	2845790	2845790	<b>2845425</b>	2845790	2614749	2737662
60419	7356	650	2595906	2596932	2591893	2598319	2590330	2590330	<b>2590326</b>	2590326	2597016	2623710
60420	2350	417	1697940	1697803	1698449	1698519	1696890	1696280	<b>1696889</b>	1696889	1714153	2604652
60421	823	286	1855951	1854929	1855285	1855170	1853950	1853950	<b>1853951</b>	1853951	1857033	2602660
60422	52775	1230	1009279	1016815	1021077	1019797	1006460	1066280	<b>1006460</b>	1007402	1022969	1720504
60423	85300	1309	1108113	1119114	1121974	1126315	1102586	1126370	<b>1102586</b>	1103651	1129989	1029986
60424	90805	1396	1170565	1175678	1175678	1173355	1153877	1237940	<b>1153877</b>	1153986	1179617	-
60425	85365	1424	1162669	1169928	1176576	1178951	1156338	1248790	<b>1156338</b>	1157557	1184010	1189709
60426	89367	1365	1145978	1154107	1159002	1158175	1140604	1233050	<b>1140604</b>	1141976	1159246	-
60427	16606	807	830329	832829	832269	830175	<b>825563</b>	838979	<b>825563</b>	825605	835860	-
60428	10990	736	794530	799151	801465	799438	<b>793445</b>	811134	<b>793445</b>	793708	801475	844014

Table .11: Computational results (objective value) on CSPLib02 instances (in bold: training set and best solutions, "-": no solution found).

Instances	Columns	Rows	BARYONYX		WEDLINFAST		WEDLINGOOD		baryonyx <sup>7/0/2</sup>		cplex		LocalSolver		Curtis [9]	
			baryonyx	WEDLINFAST	WEDLINGOOD	baryonyx <sup>7/0/2</sup>	WEDLINFAST	WEDLINGOOD	baryonyx <sup>7/0/2</sup>	cplex	LocalSolver	Curtis [9]				
c1a	7543	186	29	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	30	34				
c1	3829	186	29	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	<b>26</b>	33			
c2	14771	205	33	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	N/A			
r1	2503	53	12	11	11	11	11	11	11	11	11	11	15			
r1a	4273	53	12	11	11	11	11	11	11	11	11	11	16			
r2	3001	54	14	14	14	14	14	14	14	14	14	14	17			
r3	19091	160	<b>16</b>	<b>16</b>	<b>16</b>	<b>16</b>	<b>16</b>	<b>16</b>	<b>16</b>	<b>16</b>	-	-	20			
r4	2484	203	27	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	31			
r5a	14764	242	31	<b>28</b>	<b>28</b>	<b>28</b>	<b>28</b>	<b>28</b>	<b>28</b>	<b>28</b>	<b>28</b>	<b>28</b>	N/A			
r5	2202	242	30	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	<b>29</b>	N/A			
t1	77	24	7	7	7	7	7	7	7	7	7	7	7			
t2	3015	125	20	<b>19</b>	<b>19</b>	<b>19</b>	<b>19</b>	<b>19</b>	<b>19</b>	<b>19</b>	<b>19</b>	<b>19</b>	N/A			

Table .12: Computational results (objective value) on VCS instances (using SPP parameter configuration for  $\text{baryonyx}^r g^n$ ). “-”: no solution found.

Instances	Columns	Rows	BARONYX (1800s)				cplex (1800s)		cplex (36000s)	
			baryonyx	WEDDELINFASF	WEDDELINCFood	baryonyx <sup>r</sup> g <sup>n</sup>	-	-	-	-
VCS1200	127014	1180	849	-	-	819	844	<b>749</b>		
VCS1600	537412	1576	1449	-	-	1451	-	<b>1378</b>		

Table .13: Computational results (objective value) on nqueens instances (in bold: training set and best solutions, "-": no solution found).

Instances	Columns	Rows	BARYONYX					cplex	LocalSolver
			baryonyx	WEDELINFAST	WEDELINGOOD	baryonyx <sup>2.9n</sup>			
<b>8queens</b>	64	42	<b>18</b>	<b>18</b>	<b>18</b>	<b>18</b>	<b>18</b>	<b>18</b>	
10queens	100	54	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	<b>25</b>	
20queens	400	114	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	<b>63</b>	
30queens	900	174	108	103	103	103	101	144	
40queens	1600	234	165	161	164	155	<b>154</b>	284	
<b>50queens</b>	25000	294	197	190	194	180	<b>176</b>	340	
500queens	250000	2994	-	8343	6856	-	<b>5864</b>	24509	
1000queens	1000000	5994	-	-	20013	-	<b>17667</b>	191532	