



**HAL**  
open science

## **Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study**

Asma Farhat, Christian Ginies, Mehrez Romdhane, Farid Chemat

### ► **To cite this version:**

Asma Farhat, Christian Ginies, Mehrez Romdhane, Farid Chemat. Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. *Journal of Chromatography A*, 2009, 1216 (26), pp.5077-5085. 10.1016/j.chroma.2009.04.084 . hal-02663415

**HAL Id: hal-02663415**

**<https://hal.inrae.fr/hal-02663415>**

Submitted on 31 May 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published in : *Journal of Chromatography A*, 2009, DOI:10.1016/j.chroma.2009.04.084

## Accepted Manuscript

Title: Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study

Authors: Asma Farhat, Christian Ginies, Mehrez Romdhane, Farid Chemat

PII: S0021-9673(09)00675-X  
DOI: doi:10.1016/j.chroma.2009.04.084  
Reference: CHROMA 350021

To appear in: *Journal of Chromatography A*

Received date: 18-2-2009  
Revised date: 23-4-2009  
Accepted date: 27-4-2009

Please cite this article as: A. Farhat, C. Ginies, M. Romdhane, F. Chemat, Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study, *Journal of Chromatography A* (2008), doi:10.1016/j.chroma.2009.04.084

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.



# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

Eco-friendly and cleaner process for isolation of essential oil using microwave energy.

1

Experimental and theoretical study

1

2

Asma Farhat<sup>a,b</sup>, Christian Ginies<sup>b</sup>, Mehrez Romdhane<sup>a</sup>, Farid Chemat<sup>b,\*</sup>

3

4

<sup>a</sup> Unité de modélisation, analyse et commande de systèmes, Ecole nationale d'Ingénieurs de  
Gabés, 6029 Gabés, Tunisie.

6

<sup>b</sup> UMR A408, Sécurité et Qualité des Produits d'Origine Végétale, Université d'Avignon et des  
Pays de Vaucluse, INRA, F-84000 Avignon, France.

8

9

## 10 *Abstract*

11

12

Microwave steam diffusion (MSD) was developed as a cleaner and new process design  
and operation for isolation of essentials oils and was compared to conventional steam diffusion  
(SD). The essential oils extracted by MSD for 3 min were quantitatively (yield) and  
qualitatively (aromatic profile) similar to those obtained by conventional steam diffusion for 20  
min. In addition, an optimal operating steam flow rate of 25 g min<sup>-1</sup> and microwave power 200  
W were found to ensure complete extraction yield with reduced extraction time. To confirm the  
efficiency of this process a mathematical model was proposed to describe the mass transfer of  
essential oil from lavender. Solid-steam mass transfer coefficients obtained by MSD was six  
times higher than obtained by SD. Scanning electronic microscopy was used to confirm the  
extraction mechanism of the essential oil present in the glandular trichomes of the flowers from  
lavender outer surface. MSD was better than SD in terms of energy saving, cleanliness and  
reduced waste water.

24

25

26

**Keywords:** Microwave extraction, Essential oil, Lavender, steam diffusion, Green analysis.

27

# Postprint

2

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

## 1. Introduction

2

3           Microwave energy is well known to have a significant effect on the rate of various  
4 processes in the chemical and food industry. Much attention has been given to the application  
5 of microwave dielectric heating for the extraction of natural products that typically needed  
6 hours or days to reach completion with conventional methods. Using microwaves, full  
7 reproducible extractions can now be completed in seconds or minutes with high  
8 reproducibility, reducing the consumption of solvent, simplifying manipulation and work-up,  
9 giving higher purity of the final product, eliminating post-treatment of waste water and  
10 consuming only a fraction of the energy normally needed for a conventional extraction method  
11 such as steam distillation or solvent extraction. Several classes of compounds such as essential  
12 oils, aromas, pigments, anti-oxidants, and other organic compounds have been extracted  
13 efficiently from a variety of matrices (mainly animal tissues, food, and plant materials).  
14 Microwave extraction is a research area which has an impact in several fields of modern  
15 chemistry. All the reported applications have shown that microwave assisted extraction is an  
16 alternative to conventional techniques for such matrices. The main benefits are decrease of  
17 extraction time and solvents used. The advantages of using microwave energy, which is a non  
18 contact heat source, for the extraction of essential oils from plant materials, includes: more  
19 effective heating, faster energy transfer, reduced thermal gradients, selective heating, reduced  
20 equipment size, faster response to process heating control, faster start-up, increased production,  
21 and elimination of process steps. Extraction processes performed under the action of  
22 microwave radiation are believed to be affected in part by polarization, volumetric and  
23 selective heating [1].

24           Driven by reducing energy and waste water or solvent, advances in microwave  
25 extraction have resulted in a number of techniques such as microwave-assisted solvent  
26 extraction (MASE) [2-3], compressed air microwave distillation (CAMD) [4], vacuum  
27 microwave hydrodistillation (VMHD) [5], microwave hydrodistillation (MWHD) [6], solvent  
28 free microwave extraction (SFME) [7], microwave-accelerated steam distillation (MASD) [8-  
29 9] and microwave hydrodiffusion and gravity (MHG) [10]. Specifically in the essential oil  
30 extraction, microwave mediated processes are highly desirable due to their small equipment  
31 size, simple, rapid, controllability through mild increments of heating and low solvent  
32 consumption, thus reducing environmental impact and costs.

33

Comment citer ce document :

Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for  
isolation of essential oil using microwave energy. Experimental and theoretical study. Journal  
of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

## Postprint

3

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1 This present study has been planned with the aim to design, optimize and operate a new  
2 and green process microwave steam diffusion (MSD) (Fig. 1) for the extraction of essential oil  
3 from lavender. There have been two reported articles in the literature regarding ‘microwave’  
4 extraction techniques of lavender essential oils. Chemat et al. [8,9] reported a new process  
5 design and operation for microwave accelerated steam distillation (MASD). A batch of dry  
6 lavender flowers was packed in the MASD with water. The raw material forms the packed bed.  
7 At the bottom, steam is produced by heating water directly with microwave irradiation. Steam  
8 produced in the lower part of the apparatus passes through the lavender bed, evaporating and  
9 carrying the desired lavender essential oil, and is then directed towards the condenser, located  
10 on the top of the main apparatus body. Also, Chemat et al. [11] studied another type of new  
11 microwave design: microwave-assisted hydrodistillation (MAHD). In this case flowers were  
12 soaked in distilled water before microwave processing. Certainly, the most remarkable benefit  
13 of the both process (MAHD and MASD) is its rapidity and, energy saving. However, the most  
14 problem of these systems is that all the microwave energy is absorbed by water to heat and  
15 vaporise and only a fraction is absorbed by the essential oils inside the lavender flowers.

16 MSD was designed and constructed that only the lavender flowers are submitted to the  
17 microwave irradiation, resulting in “hot spots” by selective heating. It is already known that  
18 only water in a liquid state absorbs microwaves but steam and ice do not absorb microwaves  
19 because in the gas state the molecules are too far each other to have frictions, and in the solid  
20 state the molecules are not free to move and rotate to heat. However, the extraction is  
21 conducted in the area of the lavender flower, which is continuously heated by microwaves,  
22 resulting in a higher local temperature and hence increased extraction rates. On the other hand,  
23 this green method used the downward saturated steam, allows the extract to diffuse outside the  
24 plant material and drop by earth gravity out the microwave reactor.

25 In order to obtain a better understanding of microwave steam diffusion, comparisons  
26 have been made, in term of extraction time, yield, mass transfer coefficients from solid to  
27 liquid phases, aromatic composition, energy used and environmental impact with conventional  
28 steam diffusion (SD). The chemical analysis studies were supplemented by scanning electron  
29 micrographs to shed light on the physical action of the two extraction systems.

30  
31

# Postprint

4

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

## 2. Experimental

2

### 2.1. Plant material

Lavender flowers (*Lavandula angustifolia* Mill., *Lamiaceae*, *Lamiaceae*) were collected in July 2007 from a private garden in Avignon province (south France) and allowed to dry on a bench in the shade.

7

### 2.2. Gas chromatography-mass spectrometry

Essential oil composition was determined by gas chromatography coupled to mass spectrometry (GC–MS) analysis on a Hewlett-Packard 6890 gas chromatograph coupled to a 5973A mass spectrometer, using two fused silica capillary columns with different stationary phases. The non-polar column was HP5MS (30 m x 0.25 mm, 0.25 µm film thickness) and the polar column was a Stabilwax consisting (60 m x 0.25 mm, 0.25 µm film thickness). GC–MS spectra were obtained using the following conditions: the vector gas was helium, the flow rate for the HP-5MS column was 0.3 ml/min and with the Stabilwax column was 0.7 ml/min, mode, splitless injection volume, 1 µl; injection temperature, 250 °C; oven temperature programme, 60 °C for 8 min, then increased at 2 °C/min to 250 °C and held at 250 °C for 15 min; ionization mode, electronic impact at 70 eV.

Identification of the components was based on computer matching against commercial libraries (Wiley, MassFinder 2.1 Library, and NIST98), laboratory mass spectra libraries built up from pure substances, and MS literature data combined with the comparison of GC retention indices (*I*) on apolar and polar column. *I* values were calculated with the help of a series of linear alkanes C<sub>8</sub>–C<sub>26</sub> on apolar and polar column (HP5MS and Stabilwax). Compounds available in the laboratory were confirmed by external standard compound co-injection. Each sample was analyzed three times in both columns.

26

### 2.3. Scanning electron microscopy (SEM)

Microhistological analysis was done by using a FEIXL30 scanning electron microscope equipped with a Centaurus detector for backscattered electron image acquisition. Single flowers were individually packed in pieces of perforated aluminium foil to permit gas exchange, rapidly frozen in liquid nitrogen before being transferred to a pre-cooled (–60 °C) plate of a Pearse tissue dryer and dried overnight under vacuum. Samples were then coated with a thin gold film.

34

## Postprint

5

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

### 1 2.4. Microwave steam diffusion apparatus and procedure

2 MSD has been designed and constructed in a Milestone microwave laboratory oven [12]  
3 showed in Fig. 1. This is a multimode reactor 2.45 GHz with a maximum delivered power of  
4 1000 W. Time, temperature, pressure and power were controlled with the “easy WAVE”  
5 software package during experiments.

6 A batch of 30 g lavender flowers was packed in 1.5 litre reactor at a time. An electrical  
7 steam generator and a conventional condenser placed outside a microwave zone are connected  
8 to a reactor containing the raw material, forms the packed bed, via Pyrex connecting tubes (10  
9 cm). The condenser is connected to a receiving Florentine flask which is preferably a  
10 separating funnel to enabling the continuously collected of condensate essential oil and water.  
11 This system presents the advantage that the reactor containing aromatic particles could be  
12 easily and quickly replaced and cleaned after each cycle of extraction.

13 MSD is a new process design involves removal of essential oil from the raw material  
14 forms the packed bed into the downward saturated steam, while the mixture is continuously  
15 heated in a microwave cavity. The direct interaction of microwaves with saturated steam  
16 favours the release of essential oils trapped inside the cells of plant tissues. A mixture of hot  
17 “crude juice” and steam move thus naturally downwards by earth gravity downwards, and  
18 directed towards the condenser to the Florentine flask. The extraction was continued until no  
19 more essential oil was obtained. The essential oil is collected, dried with anhydrous sodium  
20 sulphate and stored at 4 °C until used. A wattmeter (W) has been added at the generator  
21 entrance, in order to measure the power consumption. Extractions were performed at least three  
22 times, and the mean values were reported.

### 23 2.5. Steam diffusion apparatus and procedure

24 For a rigorous comparison, the same glassware and same operating conditions have  
25 been used for conventional steam diffusion (the same process but without use of microwave  
26 cavity). In this system, the vapour produced by the steam generator crosses the plant, charged  
27 with essential oil then pass through the condenser to a receiving Florentine flask. The  
28 extraction was continued until no more essential oil was obtained. The essential oil is collected,  
29 dried with anhydrous sodium sulphate and stored at 4 °C until used. A wattmeter (W) has been  
30 added at the generator entrance, in order to measure the power consumption. Extractions were  
31 performed at least three times, and the mean values were reported.  
32

# Postprint

6

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

## 3. Results and discussion

2

### 3.1 Optimization of MSD parameters

The validation of the proposed method has been performed for determination of lavender essential oils. The main parameters that affect the extraction efficiency of MSD are steam mass flow rate ( $G_v$ ) and the microwave power ( $P_w$ ). The optimization of the experimental parameters can be carried out step-by-step. Table 1 shows different conditions of experiments carried out with the MSD for extractions of lavender. All of the selected factors were examined by using five-level.

10

#### 3.1.1 Effect of steam mass flow rate

Extraction rate increases with steam flow because of the fact that steam in extraction reactor has two uses: to provide heat energy and as a transport medium for the distillate. A low flow would be insufficient to extract the totality of essential oil and the extraction time will be too long. Extraction rate of lavender oil extractions were very faster at higher flow rates. It means that the mass transfer of lavender oil from the surface of the solid phase into the steam phase regulated most of the extraction process. Increase of flow rate resulted in increase of superficial velocity and thus quicker mass transfer (Fig. 3).

In order to understanding how the optimum of steam flow was obtained from 25 g min<sup>-1</sup>. Thus, the first order kinetics was proposed to explain the extraction essential of lavender. The kinetics was found to be well fitted with an equation of the form:

22

$$\text{Ln} \left( \frac{Y - Y(t)}{Y} \right) = - k_c \cdot t \quad (1)$$

24 where

25  $r$  = yield of lavender essential oil in each time (%)26  $r(t)$  = overall yield of lavender essential oil in the end of extraction (%)27  $k_c$  = constant kinetic (min<sup>-1</sup>)

28

We draw the curve corresponding to kinetic constant  $K_c$  in function of steam flow rate. Fig.4 shows that from 25 g min<sup>-1</sup> the constant kinetic  $K_c$  was stable. This could be the consequence of the constant pressure and, in turn, the constant steam temperature, and would explain the minimum extraction time obtained with this method from 25 g min<sup>-1</sup>.

32



## Postprint

7

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1 Thus, from this value of steam flow the temperature brought by the steam phase into the  
2 surface of the solid phase was stable. The optimum extraction time was obtained from steam  
3 flow rate equal to  $25 \text{ g min}^{-1}$  to ensure complete extraction yield and the minimum extraction  
4 time.

### 6 3.1.1 Effect of microwave power

7 Data presented in Fig.5 show the variations in the extraction yield as a function of the  
8 microwave power. No striking differences were found in oil yield in different levels. An  
9 appropriate microwave irradiation power is important to ensure the essential oil is extracted  
10 quickly; however, the power should not be too high otherwise loss of volatile compounds  
11 would result. Different microwave irradiation powers were examined for MSD extraction of  
12 essential oils from lavender flowers at the optimum steam flow rate. The total extraction time  
13 (it was until no more essential oil was obtained) in relation with the microwave irradiation  
14 power was studied. A microwave irradiation power of 200 W of lavender flowers was the  
15 optimum microwave power density because this power permits in less than 3 min to extract the  
16 essential oil completely and avoid loss of volatile compounds.

17 The first order kinetics was proposed to explain the rate of extraction of essential oil  
18 from lavender. We draw the curve corresponding which the value of the constant kinetic  $K_c$   
19 presented in Fig.6 show that at MW power higher than 200 W the constant kinetic  $K_c$  was  
20 stable. This could be the consequence of the increase of the temperature inside the sample,  
21 leading to the rupture of the essential oil cells, followed by evaporation of the water and  
22 essential oils. The power must be sufficient to reach the boiling point of the water ( $100 \text{ }^\circ\text{C}$ ),  
23 which fixes the steam temperature. However, the power should not be too high (at 300 W and  
24 400 W), otherwise loss of volatile compounds would result.

25 The both experimental MSD variables were optimized in order to maximize the yield  
26 and reduce extraction time. The highest extraction efficiency was obtained under these optimal  
27 conditions: steam flow rate  $G_v = 25 \text{ g min}^{-1}$  and incident microwave power  $P_w = 200 \text{ W}$ .

28  
29

## Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

### 1 3.2 Composition of essential oil

2 The retention time, molecular formula, content, and total content of chemical  
3 compositions in essential oils from dried lavender obtained by two kinds of extraction methods  
4 at the optimal conditions, were listed in Tables 2. The essential oils of lavender flowers  
5 extracted by MSD or SD are rather similar in their composition. The same number of volatile  
6 secondary metabolites is found in the essential oils isolated by MSD or SD, with similar yields.  
7 The essential oil of lavender also contains the same dominant components with comparable  
8 contents for MSD and SD, respectively. In this application, microwave irradiation highly  
9 accelerated the extraction process, but without causing considerable changes in the volatile oil  
10 composition, phenomenon which was already described by Pare and Belanger [18].

11

### 12 3.3 Microhistology analysis

13 The literature revealed that lavender glandular trichomes appeared swollen, with a  
14 highly wrinkled surface and empty of essential oil, but the integrity of their cuticles was  
15 maintained [11,16]. In this paper, the various extraction methods produced distinguishable  
16 physical changes in the lavender calyxes. Fig. 10a is a micrograph of the untreated flowers,  
17 which can be compared with structures of the treated lavender calyxes in Fig. 10b (SD) and  
18 Fig. 10c (MSD). Fig. 10a shows the typical structure before oil extraction; the SEM images  
19 reveal the presence of numerous peltate trichomes with a balloon shape and a smooth head,  
20 mainly distributed along the outer surface of flowers calyx ribs. The glandular trichomes were  
21 often hidden by the massive presence of bifurcated non glandular ones. After SD, all peltate  
22 trichomes reduced their volume, empty of essential oil, with a highly wrinkled surface  
23 (Fig.10b). In the case of MSD extraction, a generally different feature was shown by glandular  
24 trichomes (Fig.10c). Most of them appeared completely disrupted, particularly after MSD,  
25 showing only remnants of the cuticle. Thus, in the case of microwave heating, the glandular  
26 trichomes were subjected to more severe thermal stresses and localized high pressures; then  
27 this pressure build-up within the glandular could have exceeded their capacity for expansion,  
28 and caused their rupture more rapidly than in SD extraction.

29 Similar effects were pointed out by Iriti et al. [11] for the different variants of the  
30 microwave-assisted hydrodistillation technique (MADH) of lavender flowers. When the  
31 morpho-structural traits of glandular trichomes were suggest that the main reason for this  
32 dramatic reduction in the extraction time is trichome cuticle rupture, due to microwave  
33 exposure.

34

## Postprint

9

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

### 1 3.4 Extraction kinetics and modelling

#### 2 3.4.1 Extraction kinetics

3 From data obtained from extraction experiments with two processes, a curve of the  
4 overall yield of essential oils content in the flowers as function of time was plotted, at optimal  
5 operating conditions. No differences were found in oil yield obtained by the two techniques. As  
6 is shown in Fig. 4, an extraction time of 3 min with MSD provides yields comparable to those  
7 obtained after 20 min by means of SD. The overall yield of essential oils obtained from  
8 lavender flowers was 4.42% and 4.43% by MSD and SD, respectively. Thus, one of the  
9 advantages of the MSD method is rapidity.

10 Besides, Fig.4 shows, for two techniques, the process of the kinetics of extraction is  
11 performed in two distinctive parts:

12 (i) Part 1 of the curve corresponding to a rapid increase in the yield, suggests that the  
13 essential oil is easily accessible by the steam. It is also the phase of extraction of essential oil in  
14 flowers.

15 (ii) Part 2 of the curve represents a horizontal line which marks the end of the  
16 extraction.

17  
18 Thus, it was found that the change between the two phases is partly due to changes in  
19 the mechanisms of mass transfer and partly due to changes in the surface area from which oil  
20 evaporates. In this respect and in order to obtain a better understanding of lavender essential oil  
21 obtained by MSD a solid-steam mathematical model was proposed to describe the mass  
22 transfer in the oil obtaining process.

#### 23 24 3.4.2 Modeling

25 The aim of part of this work was to explain how microwave steam diffusion (MSD)  
26 highly accelerated the extraction process, without causing considerable changes in the volatile  
27 oil composition and properties. Thus, to explain the microwave steam diffusion of lavender  
28 essential oil, a mathematical model is proposed by Romdhane et al. [13]. However, in this  
29 paper, this model was applied with some modification.

30 All authors have attempted to model the kinetics of steam oil extraction processes  
31 considers the composition of the oil as being made up of only the single component [13, 14,  
32 15]. However, it is important to note that one unique study attempted to understanding the  
33 lavandin super steam distillation using a phenomenological model by considering three series  
34 stages in the oil obtaining process [16]. Thus, in this paper, the necessity of implementation of

# Postprint

10

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1 different volatilities for essential oil components has been suggested. Therefore, the lavender  
2 essential oil is considered as a mixture of the two major components (ie linalool and linalyl  
3 acetate) and to keep the same following assumptions have been made. The model and the  
4 experimental data were used to determine the mass transfer parameters including an overall  
5 mass transfer coefficient.

6

7 *3.4.2.a Mass balance:*

8 The overall oil mass balance made over the column boundaries gives:

$$9 \quad G_v y_0 - G_v y(t) = \frac{dm}{dt} \quad (2)$$

10 where

11  $m$  is the mass of oil contained in the column,12  $y_0$  is the input essential oil fraction by weight,13  $y(t)$  is the steam essential oil fraction by mass in the outlet of the column at a time  $t$ ,14  $G_v$  is the mass flow rate of steam ( $\text{g min}^{-1}$ ).

15 Consider that  $M_i$  is the mass of the inert part of the flowers (excluding the essential oil) and  $M$   
16 is the mass of the plant material. At any time  $t$  the relationship between  $M_i$  and  $M$  is given by:

$$17 \quad M_i = M (1 - x(t)) \quad (3)$$

18 where  $x(t)$  is the fraction by mass of oil in the seeds at a time  $t$ .19 The mass of oil in the column at a time  $t$  is then given by:

$$20 \quad m(t) = M x(t) + \varepsilon \rho_s V_c y(t) \quad (4)$$

21 The following equation gives  $x(t)$ .

$$22 \quad x(t) = 1 - \frac{1 - x_0}{1 - \frac{G_v}{M_0} \int_0^t y(t) dt + \frac{\varepsilon \rho_s V_c}{M_0} (y_0 - y)} \quad (5)$$

23 *3.4.2.b Rate of extraction*

24 The rate at which oil is transferred to steam can be described in terms of an overall mass  
25 transfer coefficient  $K$  and the difference between an average composition of the seeds,  $x$ , and an  
26 equilibrium composition,  $x^*$ , Eq (6).

$$27 \quad - \frac{dm}{dt} = K \Omega (x - x^*) \quad (6)$$

28 where

29  $K$  is an overall mass transfer coefficient ( $\text{g oil min}^{-1} \text{m}^{-2}$ ),

# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1  $\Omega$  =is the surface area available for mass transfer ( $m^2$ ),

2  $x^*$  =is an oil fraction in the flowers assumed in equilibrium with steam.

3 It is difficult to determine  $x^*$  directly; therefore it is proposed to assume that  $x^*$  is proportional  
4 to the oil vapour pressure at a given temperature. The essential oil of lavender was considered  
5 as a mixture of his two major components, therefore the oil vapour pressure is assumed to  
6 equal that of linalool and linalyl acetate:

$$7 \quad x^* = \sum_{i=1}^2 \alpha P^0 \quad (7)$$

8 where

9  $\alpha$  =is proportionality parameter,

10  $P^0$  =is the pure vapour pressure of linalool and linalyl acetate at a temperature T.

11 Consider specific mass transfer area,  $a$  ( $m^2 \text{ kg}^{-1}$ ) defined by  $a = \Omega / M_0$  and an in-column  
12 steam to material ratio,  $\check{s}$  defined by  $\check{s} = \varepsilon \rho_s V_C / M_0$ , Equation (8) can be rewritten simply as  
13 follows:

$$14 \quad \frac{1 - x_0}{(1 - x)^2} \frac{dx}{dt} + \frac{1}{\check{s}} \frac{dy}{dt} = -K a x + \alpha K a P^0 \quad (8)$$

15 Values for  $Ka$  and  $\alpha$  were determined by fitting the experimental results to Eq (8).  
16 Indeed, graphical representation of the left-hand side of Eq (8) as function of  $x$  would result in  
17 a line of slope  $-Ka$  and intercept  $\alpha Ka P^0$ . The variation of  $P^0$  was determined by computer  
18 programs namely ACDLabs 7.0.

19

### 20 3.4.2.c Determination of the mass transfer coefficient and the proportionality parameter $\alpha$

21 The mass transfer coefficient,  $K$ , at optimal operating conditions was determined using  
22 the model developed earlier (Eq. 8) combined with experimental data. The mass transfer  
23 coefficient  $K$  is determined if the specific area,  $a$ , is known. The lavender particles were  
24 assumed to be spherical and their average diameter was determined using the sieving method; a  
25 value of 2mm was obtained. The specific mass transfer area,  $a$ , is then calculated to be 0,0158  
26  $m^2 \text{ g}^{-1}$ . Values for  $K$  and  $\alpha$  were determined for the two processes and were showed in Table 3.  
27 The overall mass transfer coefficient  $K$  obtained by MSD was six times bigger than obtained by  
28 SD. These results explain and confirm the fact of the internal microwave heating of the steam  
29 within the solid samples (lavender flowers) facilitates the diffusion of glands and free bio-  
30 molecules (essential oil) from the inside of the flowers to the steam by physical phenomenon,  
31 namely hydrodiffusion.

# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1

## 2 3.4.2.d Rate of extraction

3 From data obtained from extraction experiments by MSD and SD, a curve of the oil  
4 content in the flowers as function of time was plotted (Fig. 4). The data were converted to rates  
5 of extraction, expressed as  $N$  (g oil extracted  $\text{min}^{-1}\text{m}^{-2}$ ), and plotted against flowers oil content,  
6 as shown in Fig 9. This was done by measuring small changes in oil content, ( $\Delta x$ ) for  
7 corresponding small changes in time ( $\Delta t$ ), and calculating the rate as:

$$8 \quad N = \frac{-M_i \Delta x}{\Omega \Delta t} \quad (9)$$

9 Therefore, as is shown in Fig. 9, MSD is clearly quicker than conventional SD and confirm the  
10 results obtained in Fig. 7. It was found that the mass transfer has increased by almost six times  
11 (Table 3) when the microwave power has applied at optimal conditions. This is explained by  
12 the fact that an increase in the two transfer phenomena mass and heat (Fig. 8) are in the same  
13 direction from the inside to the outside of the flowers, which facilitates oil diffusion from the  
14 inside of the flowers to steam by increasing of temperature results in an application of  
15 microwave power. In addition it was mentioned in the SEM study that the structure of the  
16 flowers was modified following an application of microwave power. Thus, the morpho-  
17 structural traits of glandular trichomes, after the microwave extraction, suggest that the main  
18 reason for this dramatic reduction in the extraction time is the consequence of trichome cuticle  
19 rupture, due to microwave exposure and results in mass transfer increase. Therefore, the  
20 extraction of essential oils from lavender with MSD was better than SD in terms of energy  
21 saving, cleanliness and product quality.

22

## 23 3.5 Cost, energy, and environment ecology

24 The reduced cost of isolation is clearly advantageous for the proposed MSD method in  
25 terms of energy and time. The power consumption has been determined with a Wattmeter at the  
26 microwave generator entrance and the electrical heater power supply. Regarding  
27 environmental impact, the calculated quantity of carbon dioxide rejected in the atmosphere is  
28 higher in the case of SD (338 kg  $\text{CO}_2$   $\text{kg}^{-1}$  oil) than for MSD (69.3 kg  $\text{CO}_2$   $\text{kg}^{-1}$  oil) (see Table  
29 4). These calculations have been made according to the literature: to obtain 1 kWh from coal or  
30 fuel, 800 g of  $\text{CO}_2$  will be rejected in the atmosphere during combustion of fossil fuel [17].  
31 Waste water was also reduced from 413 liter  $\text{kg}^{-1}$  EO with SD to 62 liter  $\text{kg}^{-1}$  EO with MSD.

32

33

1

2 **4. Conclusion**

3

4 An innovative and cleaner design process for extraction of essential oil was developed  
5 in this paper: MSD. This green process has been studied and tested using dry lavender flowers.  
6 This new system was developed to date indicate that microwave extraction process offers  
7 important advantages over traditional steam diffusion, namely, shorter extraction times (3 min  
8 against 20 min), less energy consuming and lower cost.

9 The general goal of this work was to confirm the efficiency of this new microwave system and  
10 to explain how microwave extraction highly accelerated the extraction process, without causing  
11 considerable changes in the volatile oil composition and properties. Therefore, a mathematical  
12 model was proposed to describe the mass transfer of essential oil extracted by MSD. Two  
13 model parameters were calculated by experimental data correlation for both methods (MSD  
14 and SD): overall mass transfer coefficient ( $K_{MSD} = 32.230 \text{ g m}^{-2} \text{ min}^{-1}$ ,  $K_{SD} = 6.375 \text{ g m}^{-2} \text{ min}^{-1}$ )  
15 and proportionality parameter ( $\alpha_{MSD} = 0.387 \text{ bar}^{-1}$ ,  $\alpha_{SD} = 0.186 \text{ bar}^{-1}$ ). These parameters shown  
16 that with MSD the mass transfer coefficient was six times bigger than obtained by SD. In  
17 addition, the SEM was used to confirm how the essential oil present in the glandular trichomes  
18 of lavender flowers diffused outside the plant material. The result shown that after MSD and  
19 SD, all observed glandular trichomes reduced their volume and looked like imploded, but  
20 maintaining the integrality of their cuticles. Therefore, the performance of the microwave  
21 steam diffusion was studied with a univariate study in order to quantify the variables which  
22 may minimize the time of extraction of essential oil from lavender flowers. The two variables  
23 chosen, namely steam flow rate and microwave power. The highest extraction efficiency was  
24 obtained under these conditions:  $G_v = 25 \text{ g min}^{-1}$  and  $P_w = 200 \text{ W}$ . Finally, in this study, we  
25 present microwave steam diffusion as a green, cleaner, an environmentally friendly and  
26 economic procedure.

27

28 **Acknowledgements**

29 The authors acknowledge Ms. Isabelle Bornard (INRA, Avignon, France) for scanning  
30 electronic microscopy.

31

32

# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

## 1 Notation

2  $A$  = Specific interfacial area per unit mass of bed ( $\text{m}^2 \text{kg}^{-1}$ )

3  $G_v$  = Mass flow rate of steam ( $\text{g min}^{-1}$ )

4  $K$  = Overall mass transfer coefficient ( $\text{g oil min}^{-1} \text{m}^{-2}$ )

5  $K_c$  = Kinetic constant ( $\text{min}^{-1}$ )

6  $M$  = Mass of the flowers (g)

7  $m$  = Mass of oil contained in the flowers (g)

8  $M_i$  = Mass of the inert part of the flowers (excluding the essential oil) (g)

9  $N$  = Rate of extraction ( $\text{g min}^{-1} \text{m}^{-2}$ )

10  $P$  = Pressure (bar)

11  $P^o$  = Tension vapour (bar)

12  $P_w$  = Microwave power (W)

13  $\check{S}$  = In-column steam to material ratio ( $\text{g steam g}^{-1} \text{ material}$ )

14  $t$  = Time (min)

15  $T$  = Temperature (K)

16  $V_C$  = Column volume ( $\text{m}^3$ )

17  $x$  = Flowers oil fraction by mass ( $\text{g essential oil g}^{-1} \text{ flowers}$ )

18  $x_0$  = Critical oil content ( $\text{g essential oil g}^{-1} \text{ flowers}$ )

19  $y$  = Steam oil fraction by mass ( $\text{g essential oil g}^{-1} \text{ steam}$ )

20  $Y$  = Extraction yield ( $\%$ ,  $\text{g g}^{-1}$ )

21  $\alpha$  = Proportionality parameter ( $\text{bar}^{-1}$ )

22  $\varepsilon$  = Column voidage

23  $\rho_s$  = Steam density ( $\text{kg m}^{-3}$ )

24  $\Omega$  = Surface area available for mass transfer ( $\text{m}^2$ )

## 25 Superscripts

26  $\theta$  = Initial

27  $f$  = Final

28  $in$  = Input

29  $T$  = Total

## 30 Subscripts

31  $*$  = Equilibrium

32

33



## Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1 **References**

2

3 [1] F. Chemat, M. Lucchesi, in: A. Loupy (Ed), *Microwaves in Organic Synthesis*, Wiley-  
4 VCH, Weinheim, 2006, pp. 959-983.

5 [2] K. Ganzler, A. Salgo, K. Valko, *J. Chromatogr.* 371 (1986) 299-306.

6 [3] M. Lettelier, H. Budzinski, *Analisis* 27 (1999) 259-271.

7 [4] A. Craveiro, F. Matos, J. Alencar, M. Plumel, *Flav. Fragr. J.* 4 (1989) 43-44.

8 [5] Eur. Pat. P. EP 698 076 B1 (1996).

9 [6] E.E. Stashenko, B. E. Jaramillo, J.R. Martinez, *J. Chromatogr. A* 1025 (2004) 93-103.

10 [7] M.E. Lucchesi, F. Chemat, J. Smadja, *J. Chromatogr. A* 1043 (2004) 323-327.

11 [8] F. Chemat, M.E. Lucchesi, J. Smadja, L. Faveretto, G. Colnaghi, F. Visinoni, *Anal. Chim.*  
12 *Acta* 555 (2006) 157-160.

13 [9] N. Sahraoui, M. Abert-Vian, I. Bornard, C. Boutekdjiret, F. Chemat, *J. Chromatogr. A* 1210  
14 (2008) 229-233.

15 [10] M. Abert-Vian, X. Fernandez, F. Visinoni, F. Chemat, *J. Chromatogr. A* 1190 (2008) 14-  
16 17.

17 [11] M. Iriti, G. Colnaghi, F. Chemat, J. Smadja, F. Faoro and F. A. Visinoni, *J. Flav. Fragr.*  
18 21 (2006) 704-712.

19 [12] European Pharmacopoeia, *Council of Europe*, Strasbourg, 3rd ed., 1997.

20 [13] M. Romdhane, C. Tizaoui, *J. Chem. Technol. Biotechnol.* 80 (2005) 759-766.

21 [14] P. Morin, C. Gunther, L. Peyron and H. Richard, *Bull. Soc. Chim. Fr.* 5 (1985) 921-930.

22 [15] E.H. Benyoussef, S. Hasni, R. Belabbes, J.M. Bessiere, *J. Chem. Eng.* 85 (2002) 1-5.

23 [16] M. G. Cerpa, R. B. Mato, and M. J. Cocero, *AIChE J.* 54 (2008) 909-917.

24 [17] M. A. Ferhat, B. Y. Meklati, F. Chemat, *Flav. Fragr. J.* 22 (2007) 494-504.

25 [18] J.R.J. Pare, J.M.R. Belanger, *Instrumental Methods in Food Analysis*, Elsevier,  
26 Amsterdam, 1997.

27

28

29

30

31

32

33

34

## Postprint

16

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

- 1 **Figure 1.** Schematic diagram of the Microwave steam diffusion process.
- 2 **Figure 2.** Conventional steam diffusion (SD).
- 3 **Figure 3.** Yield profile of essential oil from lavender as function of the mass flow rate of
- 4 steam.
- 5 **Figure 4.** Kinetic constant and the infinite time of extraction of essential oil from lavender as
- 6 function of the mass flow rate of steam.
- 7 **Figure 5.** Yield profile of essential oil from lavender as function of the microwave power.
- 8 **Figure 6.** Kinetic constant and the infinite time of extraction of essential oil from lavender as
- 9 function of the microwave power.
- 10 **Figure 7.** Yield profile of lavender essential oil obtained by MSD (■) and SD (□) as
- 11 function of the extraction time.
- 12 **Figure 8.** Oil transfer route from the trichome to the steam flow bluk.
- 13 **Figure 9.** Rate of extraction of lavender oil ( $\text{g min}^{-1} \text{m}^{-2}$ ) as function of lavender oil fraction by
- 14 mass ( $\text{g oil g}^{-1} \text{solid}$ ) obtained by MSD (■) and SD (□).
- 15 **Figure 10.** SEM micrographs showing the morphology of flower calyx trichomes of lavender,
- 16 before (a), after SD extraction (b) and after MSD extraction (c).

17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

17

1

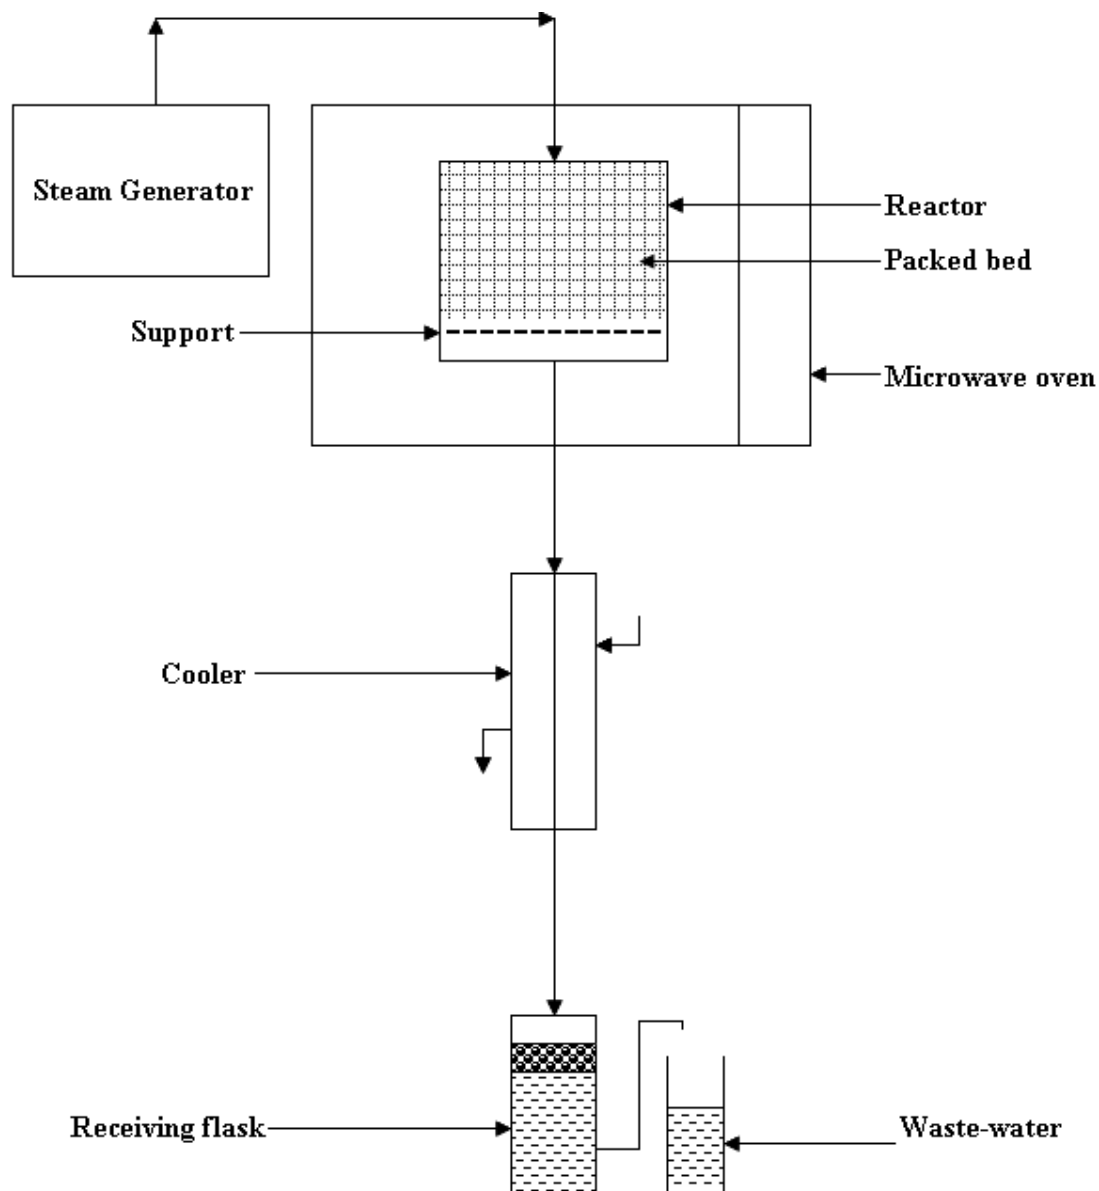

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

# Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

18

1

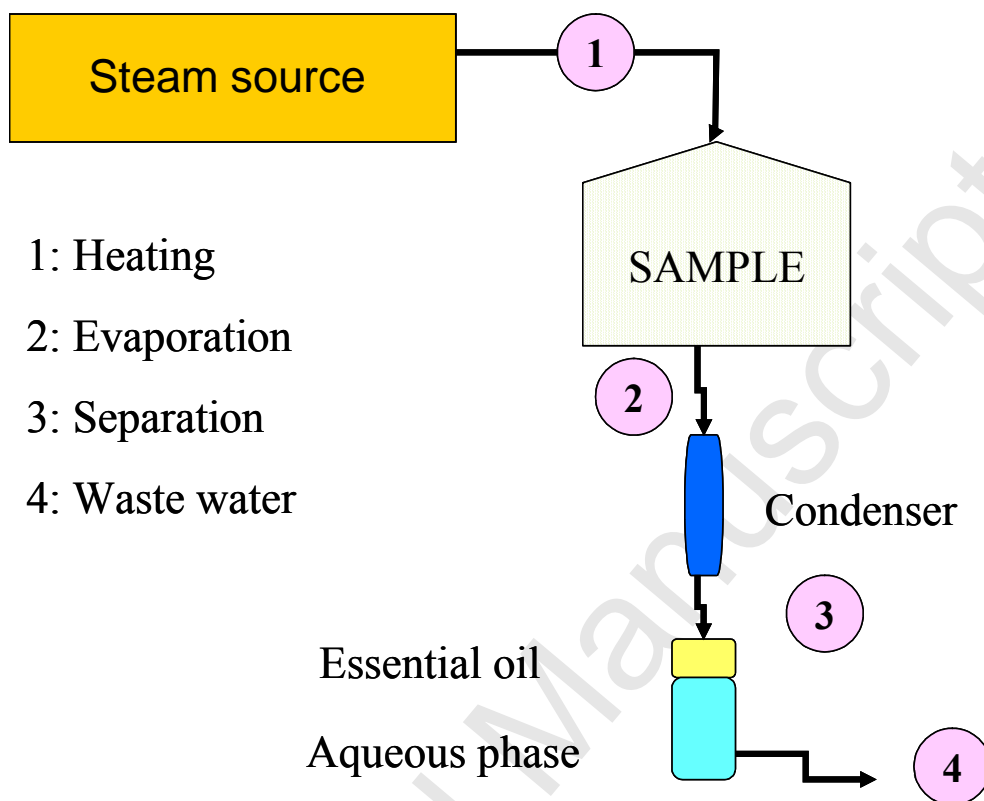

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

## Postprint

19

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1

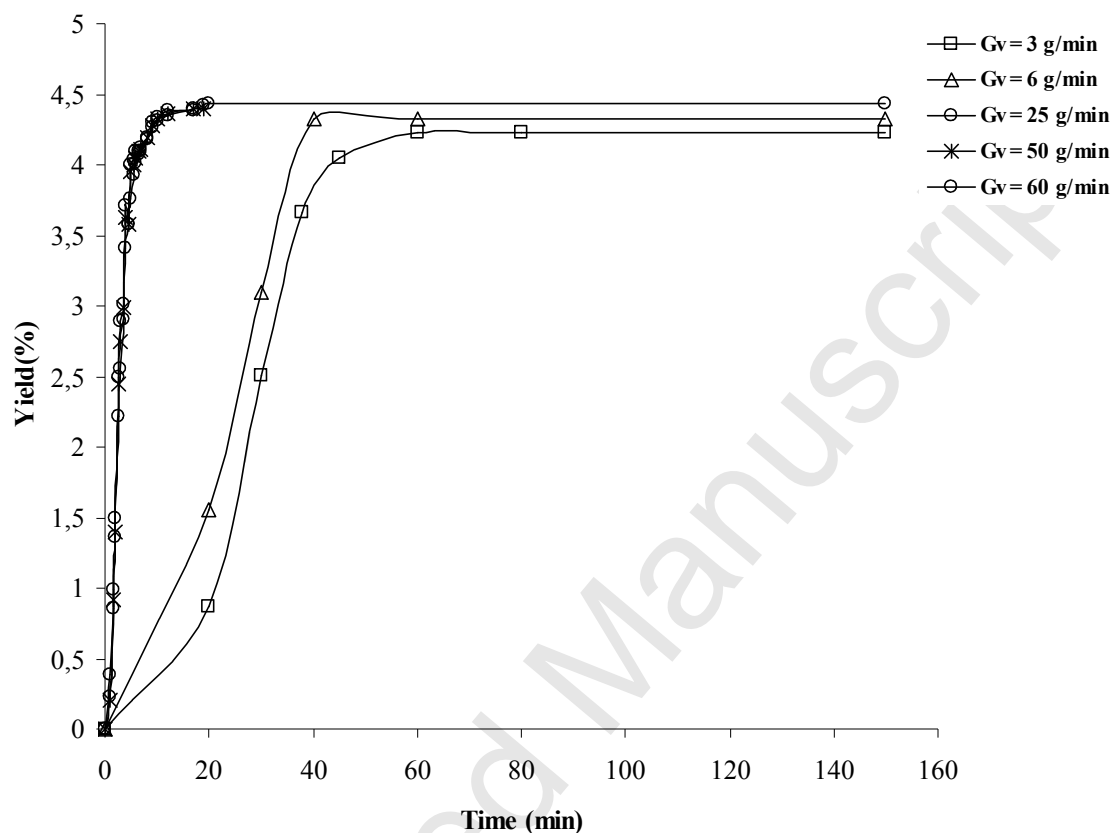

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

## Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

20

1

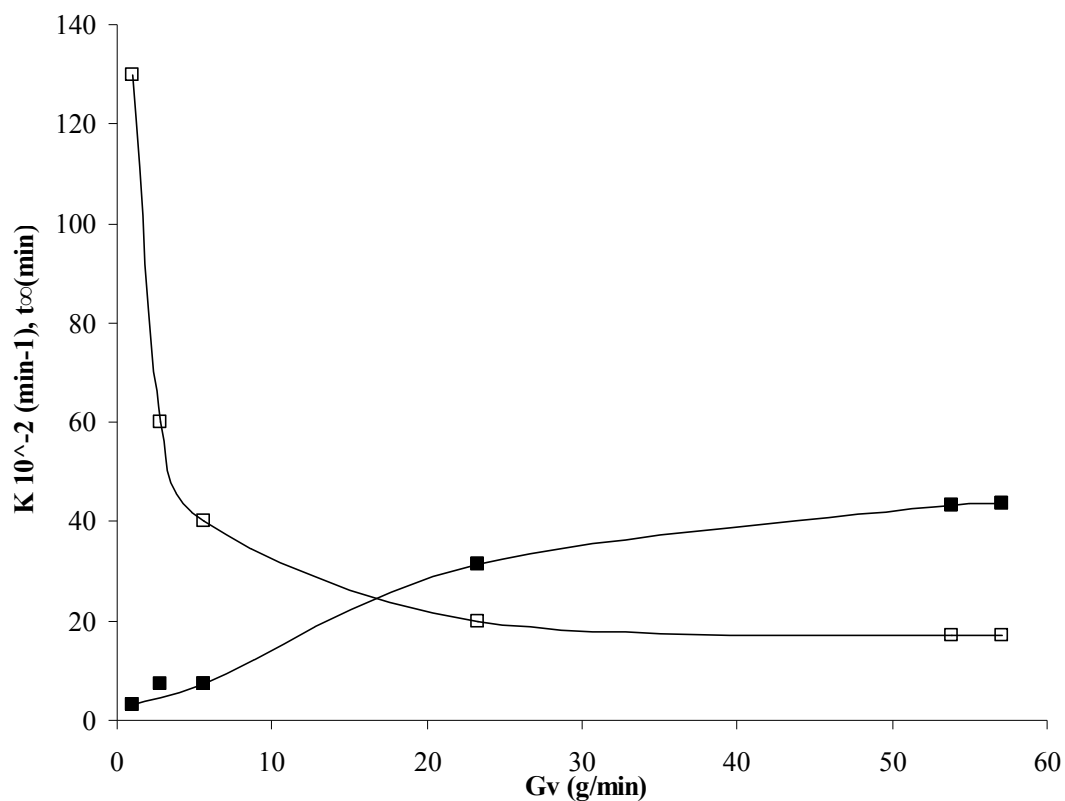

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

Accepte


Comment citer ce document :

Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

## Postprint

21

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

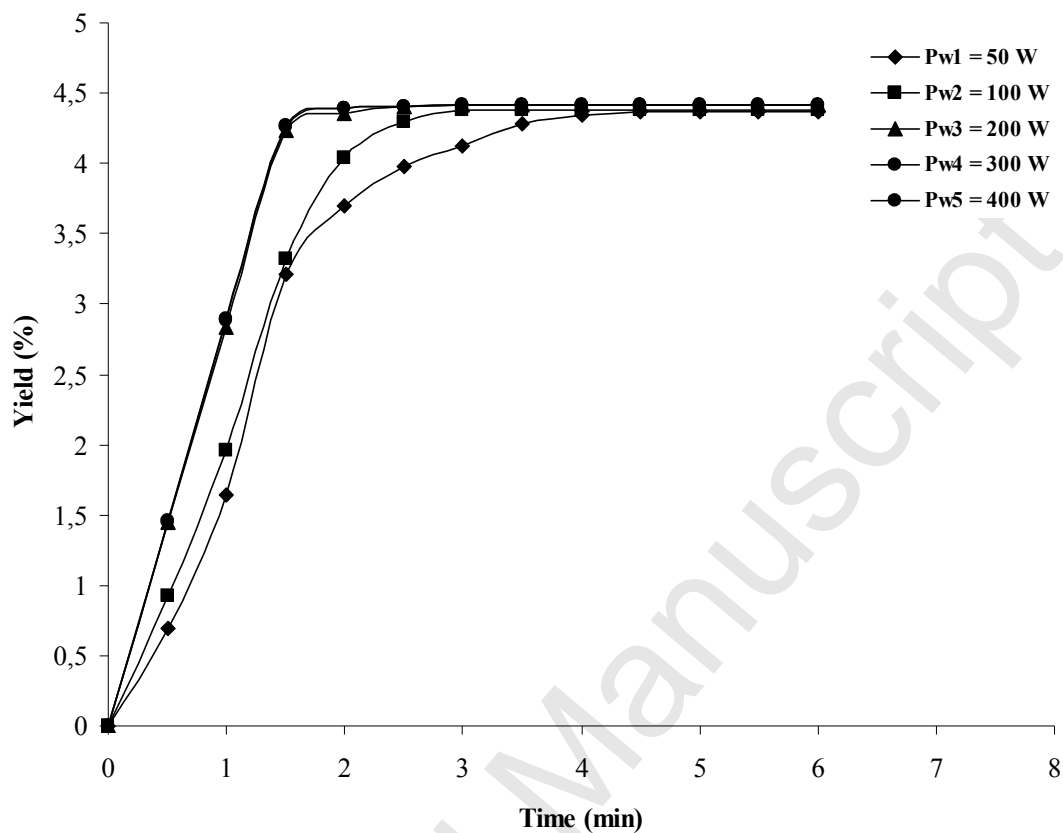

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

## Postprint

22

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1

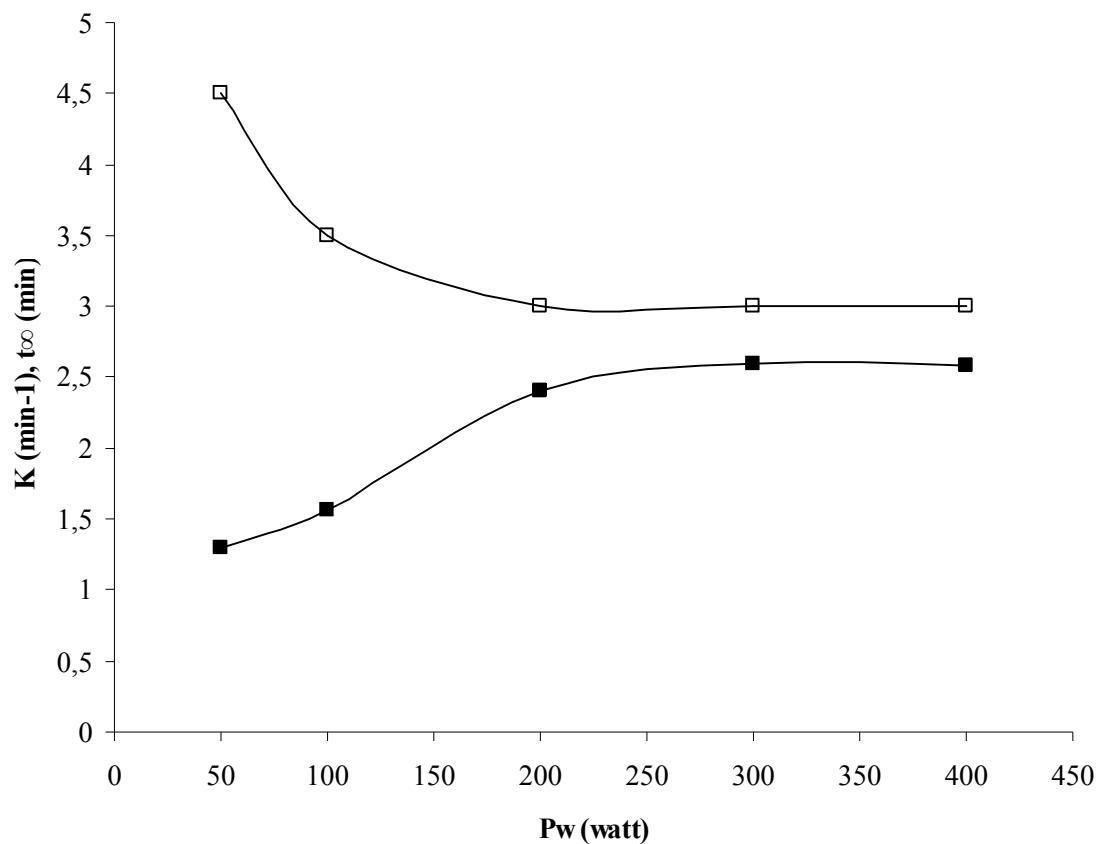

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

ACCEPTED

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084



## Postprint

23

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

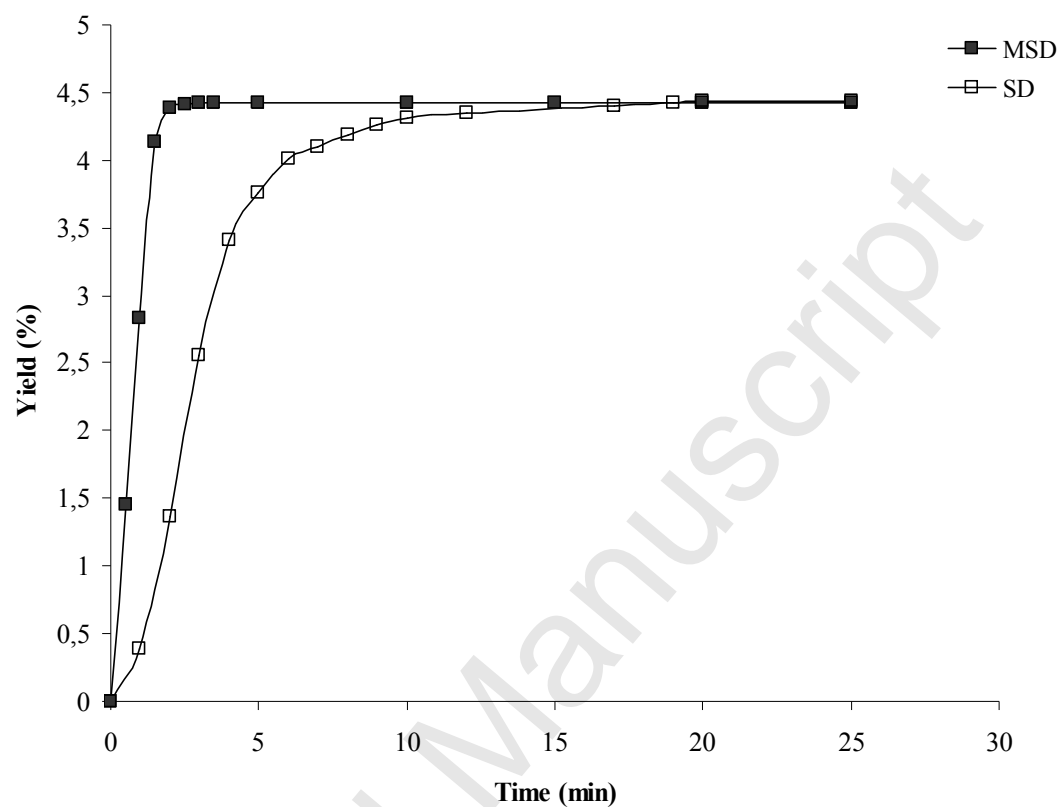

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

# Postprint


24

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1

2

- 1: Mass transfer
- 2: Diffusion
- 3: Heat transfer

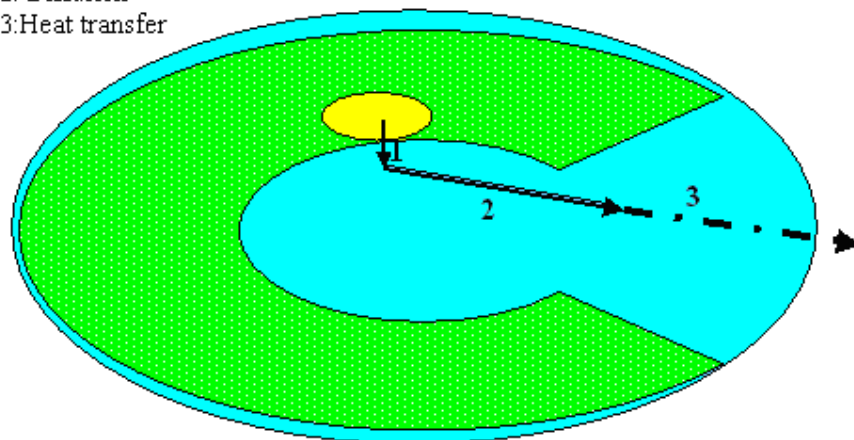

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32


Comment citer ce document :

Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

## Postprint

25

Version définitive du manuscrit publié dans / Final version of the manuscript published in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

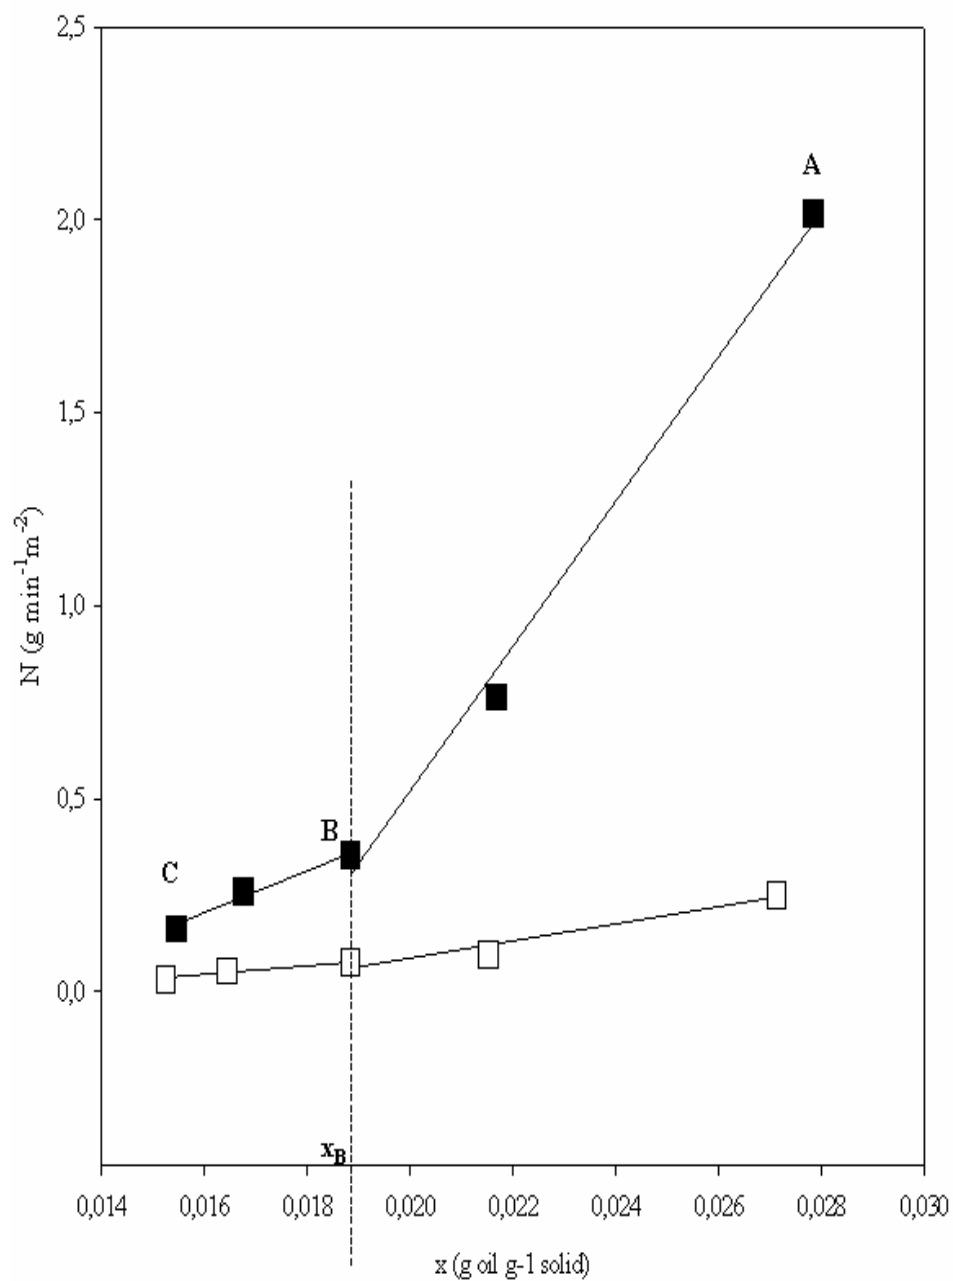

1  
2  
3  
4  
5  
6  
7  
8  
9  
10

Comment citer ce document :


Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

**Postprint**

26


Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1

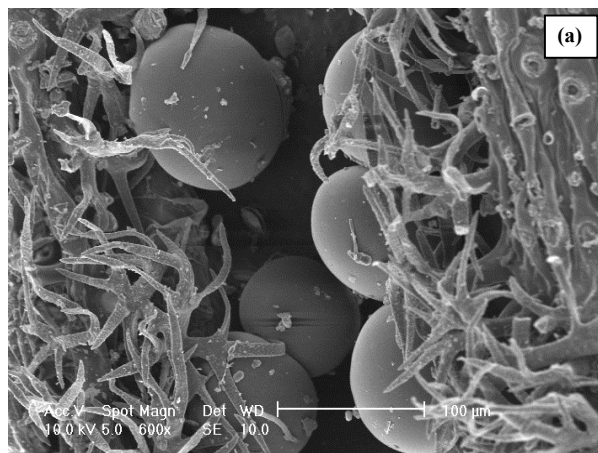

2


3

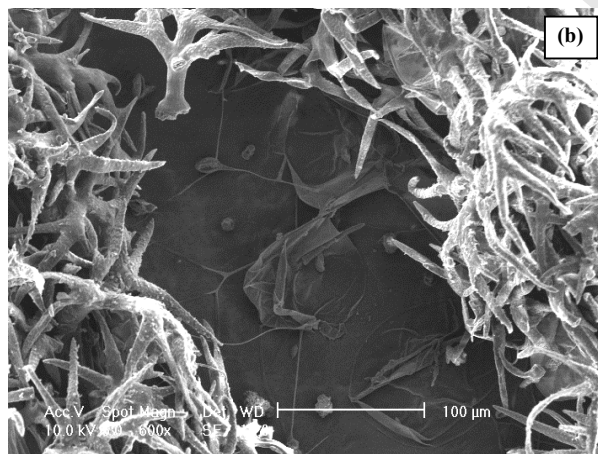

4

5

6

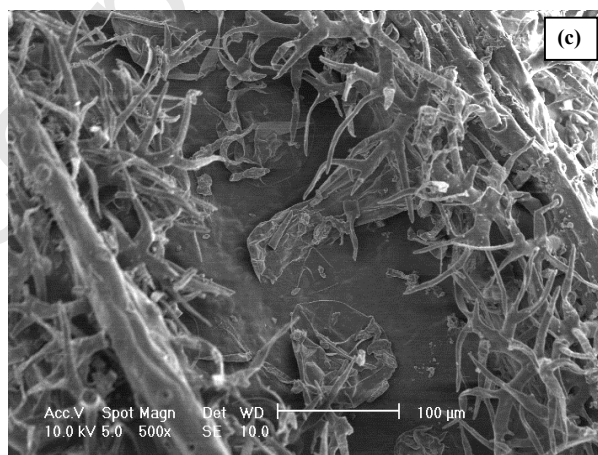

7

8

9

10

11

12

13

Comment citer ce document :

Farhat, A., Ginies, C., Romdhane, M., Chemat, F. (2009). Eco-friendly and cleaner process for isolation of essential oil using microwave energy. Experimental and theoretical study. Journal of Chromatography. A, 1216 (26), 5077-5085. , DOI : 10.1016/j.chroma.2009.04.084

**Postprint**

27

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1  
2  
3  
4  
5  
6  
7  
8  
9**Table.1** MSD experimental conditions for lavender extraction.

Parameters	$G_v$ (g min <sup>-1</sup> )	$P_w$ (W)
	3	50
	6	100
	25	200
	50	300
	60	400

Accepted Manuscript

## Postprint

Version définitive du manuscrit publié dans / Final version of the manuscript published in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

Table.2 Chemical composition of lavender essential

n°	Compound	<i>I</i> <sup>a</sup>	MSD (%)				SD (%)		
			1	2	3	5	10	15	20
	<b>Extraction time (min)</b>		1	2	3	5	10	15	20
	<b>Monoterpenes</b>								
1	$\alpha$ -Thujene	937	0.154	0.175	0.094	0.049	0.059	0.158	0.0128
2	$\alpha$ -Pinene	937	0.51	0.6	0.32	0.161	0.88	0.025	0.083
3	Camphene	955	0.4	0.45	0.24	0.129	0.049	0.107	0.04
4	Sabinene	976	0.167	0.15	0.086	0.053	0.055	0.13	0.032
5	P-Pinene	971	1.1	0.87	0.53	0.467	0.24	0.35	0.138
6	$\beta$ -Myrcene	990	0.69	0.446	0.347	0.336	0.74	0.566	0.02
7	$\alpha$ -Phellandrene	1010	0.069	0.057	0.034	0.029	0.04	0.137	0.13
8	p-Cymene	1030	0.12	0.091	0.058	0.04	0.04	0.067	0.048
9	limonene	1034	1.467	13.71	14.40	0.43	0.34	0.249	1.2
10	Eucalyptol	1038	11.659	7.83	4.9	4.69	3.62	4.17	2
11	cis- $\beta$ -Ocimene	1049	0.266	0.149	0.146	0.169	0.43	0.226	0.125
12	$\gamma$ -Terpinene	1063	0.236	0.179	0.116	0.098	0.078	0.114	0.068
	<b>Oxygenated monoterpenes</b>								
13	Terpinolene	1091	0.46	0.31	0.2	0.165	0.09	0.08	0.11
14	Linalool oxide	1093	0.668	1.044	0.47	0.46	0.6	0.67	0.08
15	Linalool	1104	35.51	30.47	27.1	19.09	44.86	32.73	28.88
16	Camphor	1160	8.923	9.255	8.152	8	6.25	7.44	2.5
17	Lavendulol	1170	0.432	0.747	1.119	1.07	0.317	1.08	0.339
18	Borneol	1184	9.411	5.438	6.225	6.4	4.3	4.58	2.12
19	Terpinen-4-ol	1191	5.795	7.245	7.47	7.24	6.5	7.29	2.71
20	$\alpha$ -Terpineol	1204	0.217	0.37	0.499	0.55	1.53	4.94	0.45
21	Geranyl acetate	1287	0.191	0.398	0.566	2.86	2.61	1.14	4.25
	<b>Sesquiterpenes</b>								
22	Caryophyllene	1435	0.664	1.31	1.84	1.6	1.17	0.47	2.29
23	(Z)- $\beta$ -Farnesene	1457	0.644	1.59	2.65	2.38	1.84	0.72	3.63
23	Germacrene D	1497	0.26	0.679	1.37	1.23	0.88	0.2	1.7
25	Linalyl isovalerate	1505	0.106	0.287	0.673	0.67	0.71	0.40	1.18
26	$\alpha$ -Farnesene	1509	0.027	0.083	0.15	0.14	0.129	0.398	0.287
27	$\gamma$ -Cadinene	1528	0.05	0.13	0.29	0.26	0.29	0.22	0.45
	<b>Oxygenated sesquiterpenes</b>								
28	P-Sesquiphellandrene	1534	0.33	0.119	0.27	0.26	0.25	0.081	0.42
29	Caryophyllene oxide	1601	0.096	0.119	0.432	0.57	0.699	0.52	1.44
30	$\beta$ -Cadinol	1659	0.311	0.136	0.568	0.81	1.848	1.55	2.49
31	$\alpha$ -Bisabolo	1700	1.485	0.522	2.31	3.33	7.96	6.5	12
	<b>Other oxygenated compounds</b>								
32	3-Octanone	987	0.45	0.32	0.2	0.185	0.15	0.152	0.064
33	Terpenol(154)	1076	1.65	1.229	2.02	1.06	0.76	1.27	0.29
34	Propanoic acid, 2-methyl, hexyl ester	1149	0.435	0.4	0.323	0.27	0.178	0.05	0.22
35	Butanoic acid, hexyl ester	1193	1.19	1.36	1.21	1.141	3.566	4.024	1.109
36	Butanoic acid, 2-methyl-, hexyl ester	1283	0.255	0.295	0.318	0.249	0.2	0.328	0.33
37	Butanoic acid, 3-methyl-, hexyl ester		0.28	0.349	0.377	0.283	0.189	0.075	0.36
38	1,6-Octadien-3-ol, 3,7-dimethyl, acetate	1252	17.73	19.61	21.36	20.8	16.64	3.54	33.48
39	Cyclobutanecarboxylic acid, hexyl ester??	1334	0.191	0.398	0.566	0.48	0.35	0.3	0.7
40	Unknown diol	1337	0.037	0.131	0.355	0.58	0.46	0.52	0.097
	Extraction time (min)		1	2	3	5	10	15	20
	Yield (%)				4.42				4.42

(a) *I*: Relative retention indices relative to C<sub>5</sub>-C<sub>28</sub> *n*-alkanes calculated on non-polar HP5MS™ capillary column.

**Postprint**

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1

2

**Table 3.** Mass transfer results.

3

Parameters	MSD	SD
K (g m <sup>-2</sup> min <sup>-1</sup> )	32.230	6.375
$\alpha$ (Bar <sup>-1</sup> )	0.38749715	0.18657825

4

5

## Postprint

30

Version définitive du manuscrit publié dans / Final version of the manuscript published  
in : Journal of Chromatography A, 2009, DOI:10.1016/j.chroma.2009.04.084

1  
2  
3  
4  
5

**Table 4.** Yields, extraction time and energy consumption of lavender flowers from extracted by  
MSD and SD.

	MSD	SD
Extraction time (min)	3	20
Yield (%)	4.42	4.43
Environmental impact (Kg CO <sub>2</sub> rejected. kg <sup>-1</sup> oil)	69.3	338
Energy consumption (KWh. kg <sup>-1</sup> oil)	86.42	423.83
Floral waters rejected (liter. kg <sup>-1</sup> oil)	62.2	413

6  
7  
8  
9  
10  
11  
12  
13

Accepted