



In-situ NMR highlights structural change during apple heating

S. Clerjon, Alexandre Leca, Catherine M.G.C. Renard, J.-M. Bonny, Amidou Traore

► To cite this version:

S. Clerjon, Alexandre Leca, Catherine M.G.C. Renard, J.-M. Bonny, Amidou Traore. In-situ NMR highlights structural change during apple heating. International Conference on Magnetic Resonance Microscopy, ICMRM, Aug 2019, Paris, France. , 2019. hal-02736229

HAL Id: hal-02736229

<https://hal.inrae.fr/hal-02736229>

Submitted on 2 Jun 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

In-situ NMR highlights structural change during apple heating

Sylvie Clerjon^a, Alexandre Leca^b, Catherine Renard^b, Jean-Marie Bonny^a and Amidou Traore^a

^aAgroResonance, UR370 QuaPA - INRA, 63122 Saint-Genès-Champanelle, France

^bSQPOV, INRA, 84914, Avignon, France

Introduction: Microstructure and texture evolution of foods during cooking is difficult to achieve, because conventional techniques cannot analyze the internal structure, while preserving its integrity. For this very often-processed product that is apple, it is essential to understand thermal degradations. To study such phenomena, we undertook in-situ quantitative NMR during the cooking process.

Methods: Five Golden Delicious apples were sampled in four 10 mm long and 5 mm diameter cylinders. Each of the twenty samples was sealed in parafilm. The thermal treatments were performed *in situ* in a 9.4 T Bruker Ascend 400WB instrument. A 5-mm diameter microimaging birdcage radiofrequency coil was used for both excitation and signal reception. A controlled hot air flow cooked the sample from 20 to 60°C in 70 min.

Non-spatially resolved (spectroscopy) T2 measurements were performed with a Carr-Purcell-Meiboom-Gill (CPMG) pulse sequence [1], with the interpulse delay τ of 125 microseconds. The repetition time was set to 5 seconds for a total acquisition duration of 2min30s.

Assuming that the T2 decay curve stands as a sum of weighted exponential decays describing the complexity of the internal structure of the sample:


$$S = \sum_{j=1}^m A_j e^{(-t_i/T_{2j})} \quad i=1, 2 \dots n$$

each decay curve was analyzed with an in-house Matlab® implementation of the non-negative least squares (NNLS) algorithm [2].

Results and discussion:

As an illustration, this figure shows T2 change with cooking temperature for one of our sample. A shift in T2 value of the main water fraction is between 50 and 53°C (arrow). This critical temperature is in accordance with mechanical properties changes measured on samples cooked at various temperature.

Conclusion: This study points out the feasibility of resolving multiexponential T2 decay, at high magnetic field, during apple sample cooking. It provides longitudinal information about structure change and water redistribution on a same sample during the whole process.

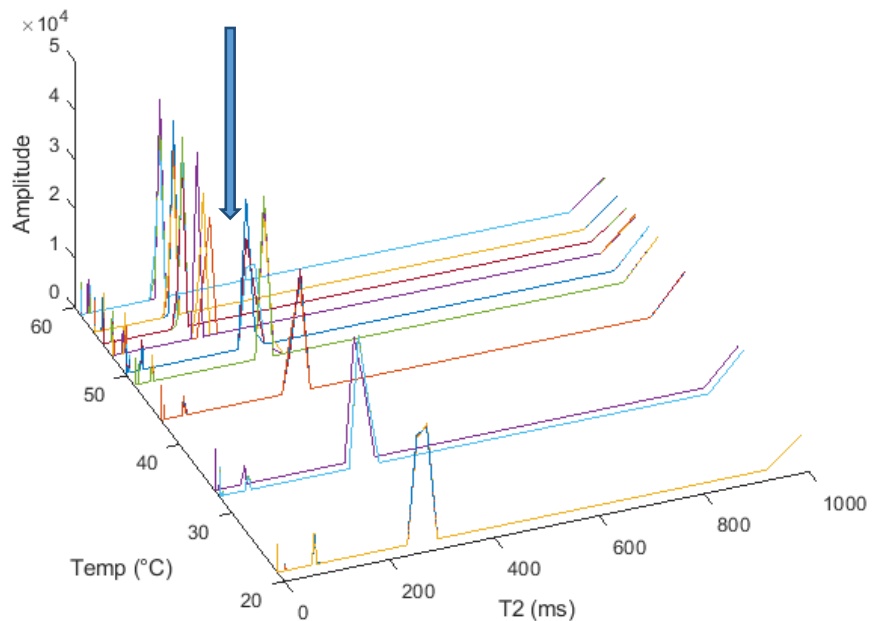

References: [1] Meiboom, S. and D. Gill, Rev. Sci. Instrum. (1958).

[2] Istratov, A. A. and O. F. Vyvenko, Rev. Sci. Instrum. (1999).