



HAL
open science

DEM capabilities with Polyhedral and Level Set shape descriptors

Jérôme Duriez, Tarek Mohamed, Stéphane Bonelli, Frederic Golay, Cedric Galusinski

► **To cite this version:**

Jérôme Duriez, Tarek Mohamed, Stéphane Bonelli, Frederic Golay, Cedric Galusinski. DEM capabilities with Polyhedral and Level Set shape descriptors. IRN GeoMech workshop on hydromechanical instabilities, May 2022, Aix-en-Provence, France. hal-04222011

HAL Id: hal-04222011

<https://hal.inrae.fr/hal-04222011v1>

Submitted on 28 Sep 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial 4.0 International License

DEM capabilities with Polyhedral and Level Set shape descriptors

Jérôme Duriez¹, Tarek Mohamed¹, Stéphane Bonelli¹, Frédéric Golay², Cédric Galusinski²

¹INRAE, Aix Marseille Univ, RECOVER, Aix-en-Provence, France

²IMATH, Université de Toulon, CS 60584 83041 Toulon Cedex 9, France

jerome.duriez@inrae.fr

Keywords: Granular mechanics ; Level Set-Discrete Element Method (LS-DEM) ; Polyhedra

Abstract

Geometrically realistic particles are getting more and more available in discrete (DEM) simulations thanks to a variety of dedicated DEM implementations, enabling one to properly address the known influence of particle shape in geomechanics [1]. In addition to the multi-sphere approach, whereby an appropriate number of overlapping spheres are clumped together and act as one rigid body, one can mention the possibility to define a particle's surface as a polyhedra with its set of vertices, edges and facets or through a Level Set description [2]. The latter relies on a discrete field for the signed distance function to the surface at hand, whose zero level set implicitly describes that surface. For the purpose of contact treatment, a surface discretization in terms of boundary nodes is deduced from the distance field and also enters the method as a second ingredient.

Firstly, the capabilities offered by polyhedral particles lead to propose and validate against experimental data a DEM model for Toyoura sand for a wide range of loading conditions (drained and undrained triaxial compression and extension) and various initial void ratios and confining pressures [3]. Polyhedral Discrete Elements are simply but efficiently defined in 3D from a 2D micrograph of Toyoura sand (Fig. 1). In addition to show satisfactory predictive abilities, the model, through a parametric analysis, illustrates once more the importance for a proper calibration in DEM of initial fabric, in addition to shape or contact parameters.

Second, the polyhedral approach is compared with the Level Set one, in the case of implementations into the YADE open-source code [4,5,6]. While being orders of magnitude heavier than for classical spheres [7], Level Set (LS) computational costs are shown to be possibly lighter than those of polyhedra and may be further optimized by it in terms of memory or time cost. LS-based simulations finally address the mechanical behaviour of superquadric particles (superellipsoids, Fig. 2).

References

- [1] G.-C. Cho, J. Dodds and J. C. Santamarina, Particle shape effects on packing density, stiffness, and strength: natural and crushed sands, *J. of Geotechnical and Geoenvironmental Engineering*, 132(5), 2006
- [2] R. Kawamoto, E. Andò, G. Viggiani, and J. E. Andrade, Level set discrete element method for three-dimensional computations with triaxial case study. *J. of the Mechanics and Physics of Solids*, 91, 2016
- [3] T. Mohamed, J. Duriez, G. Veylon and L. Peyras, DEM models using direct and indirect shape descriptions for Toyoura sand along monotonous loading paths, *Computers and Geotechnics*, 142, 2022
- [4] V. Šmilauer et al., Yade Documentation 3rd ed. *The Yade Project* (<http://yade-dem.org/doc/>)
- [5] J. Eliáš, Simulation of railway ballast using crushable polyhedral particles, *Powder Technology*, 264, 2014

[6] J. Duriez and C. Galusinski, A Level Set-Discrete Element Method in YADE for numerical, micro-scale, geomechanics with refined grain shapes, *Computers & Geosciences*, 157, 2021

[7] J. Duriez and S. Bonelli, Precision and computational costs of Level Set-Discrete Element Method (LS-DEM) with respect to DEM, *Comp. & Geotechnics*, 134, 2021

[8] B. Li, Effect of fabric anisotropy on the dynamic mechanical behavior of granular materials. *Ph.D. thesis, Case Western Reserve University*, 2011

Figures

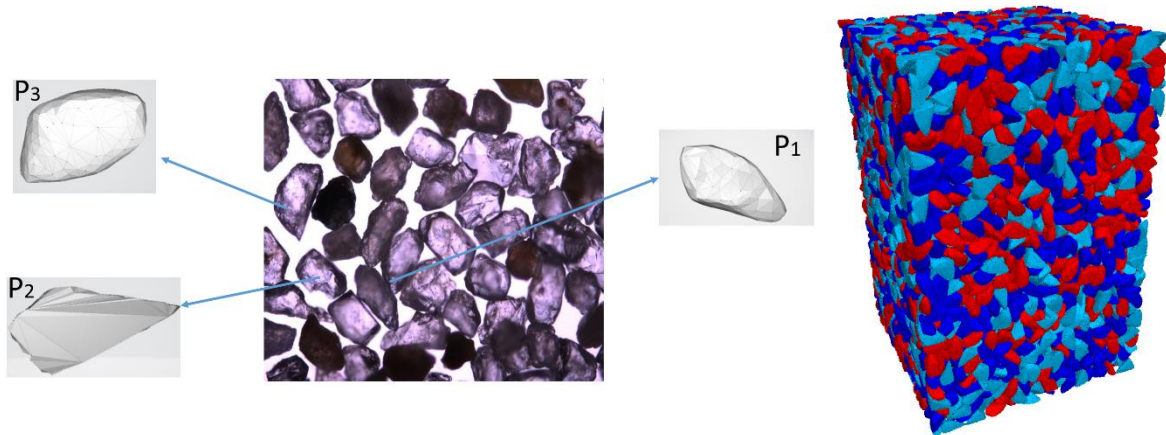


Figure 1: Polyhedral model for Toyoura sand [3] Left: micrograph [8] with corresponding Discrete Elements. Right: corresponding numerical packing

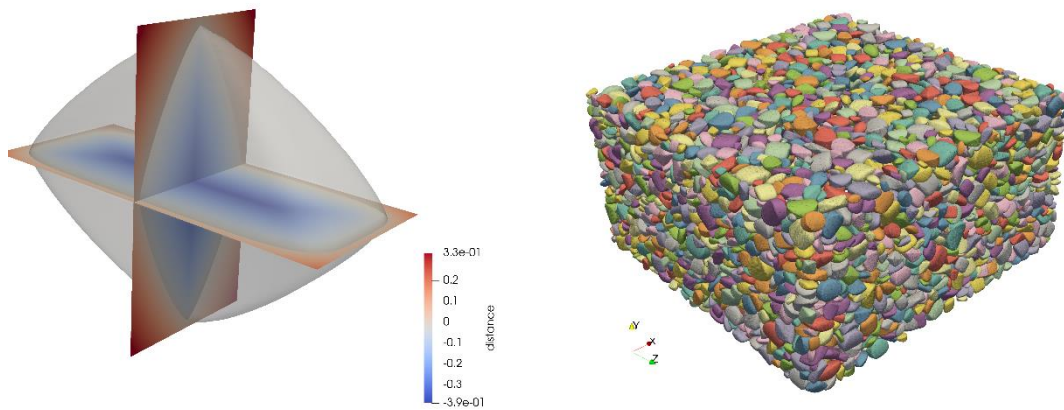


Figure 2: Level Set description of superellipsoids